
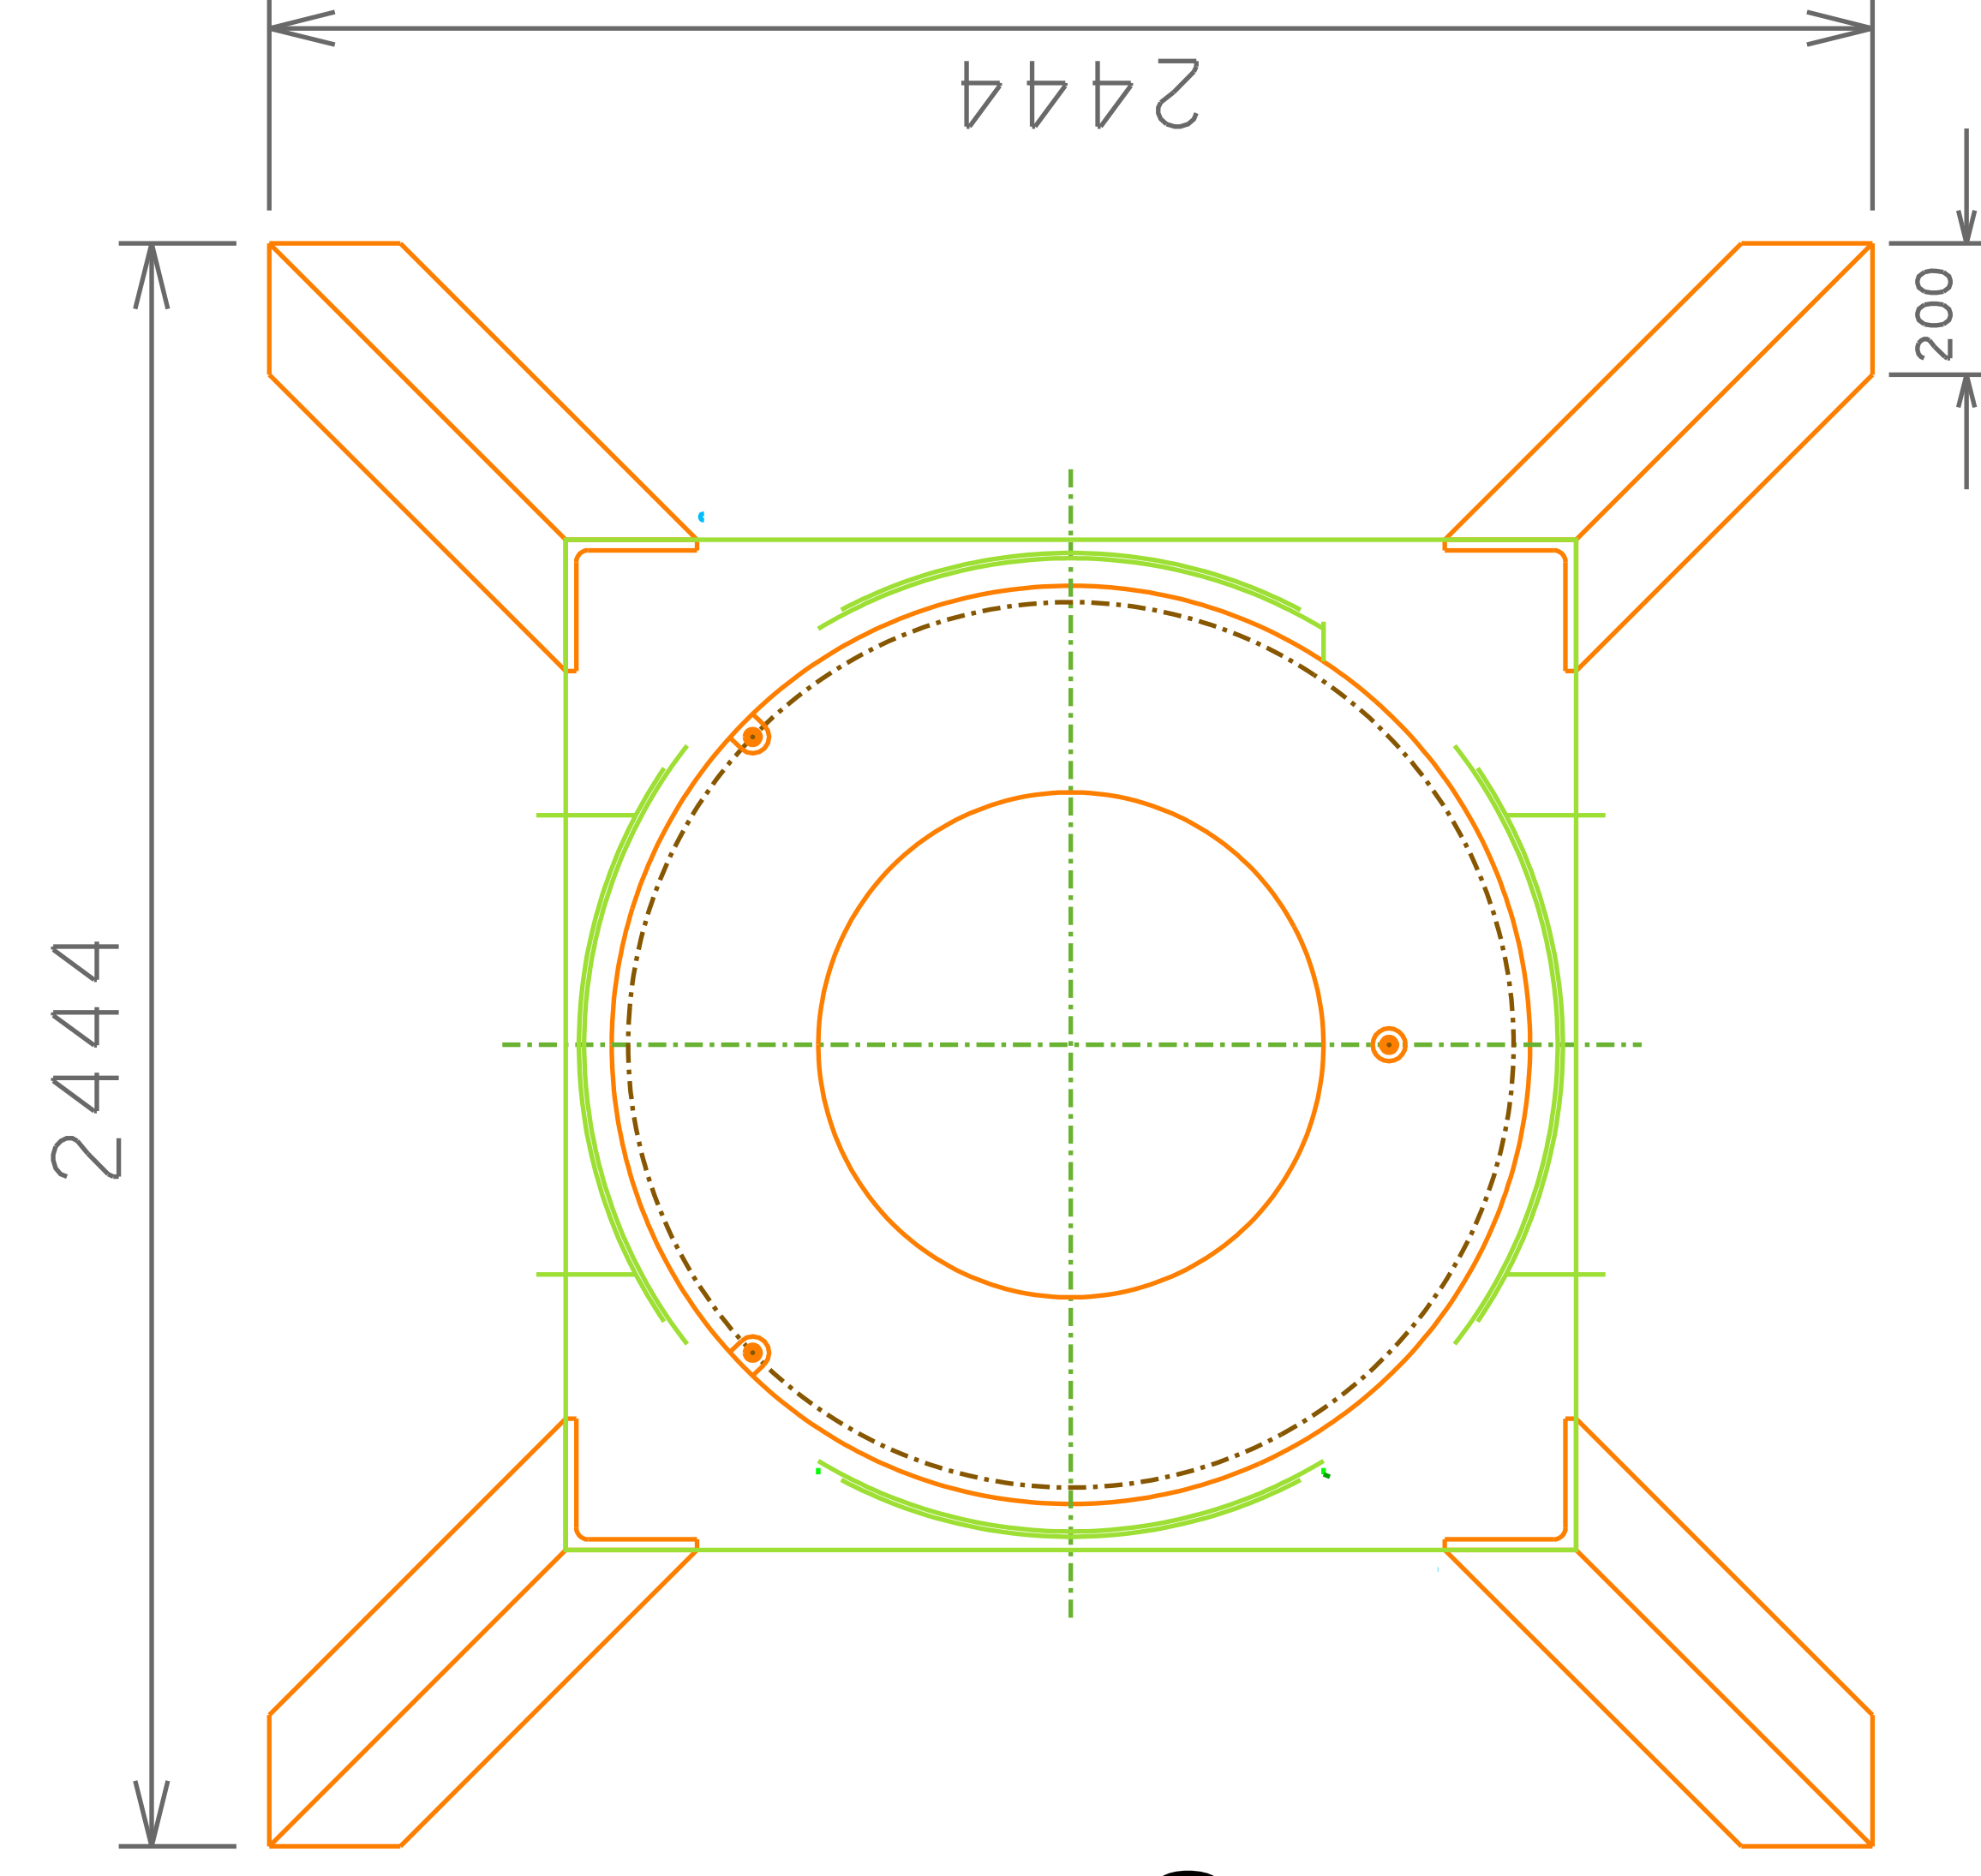


LCGT SAS type B agreed parameters

note: the type-B chambers must be able to move on rails along the beam line to match the lengths required by different modulation frequencies

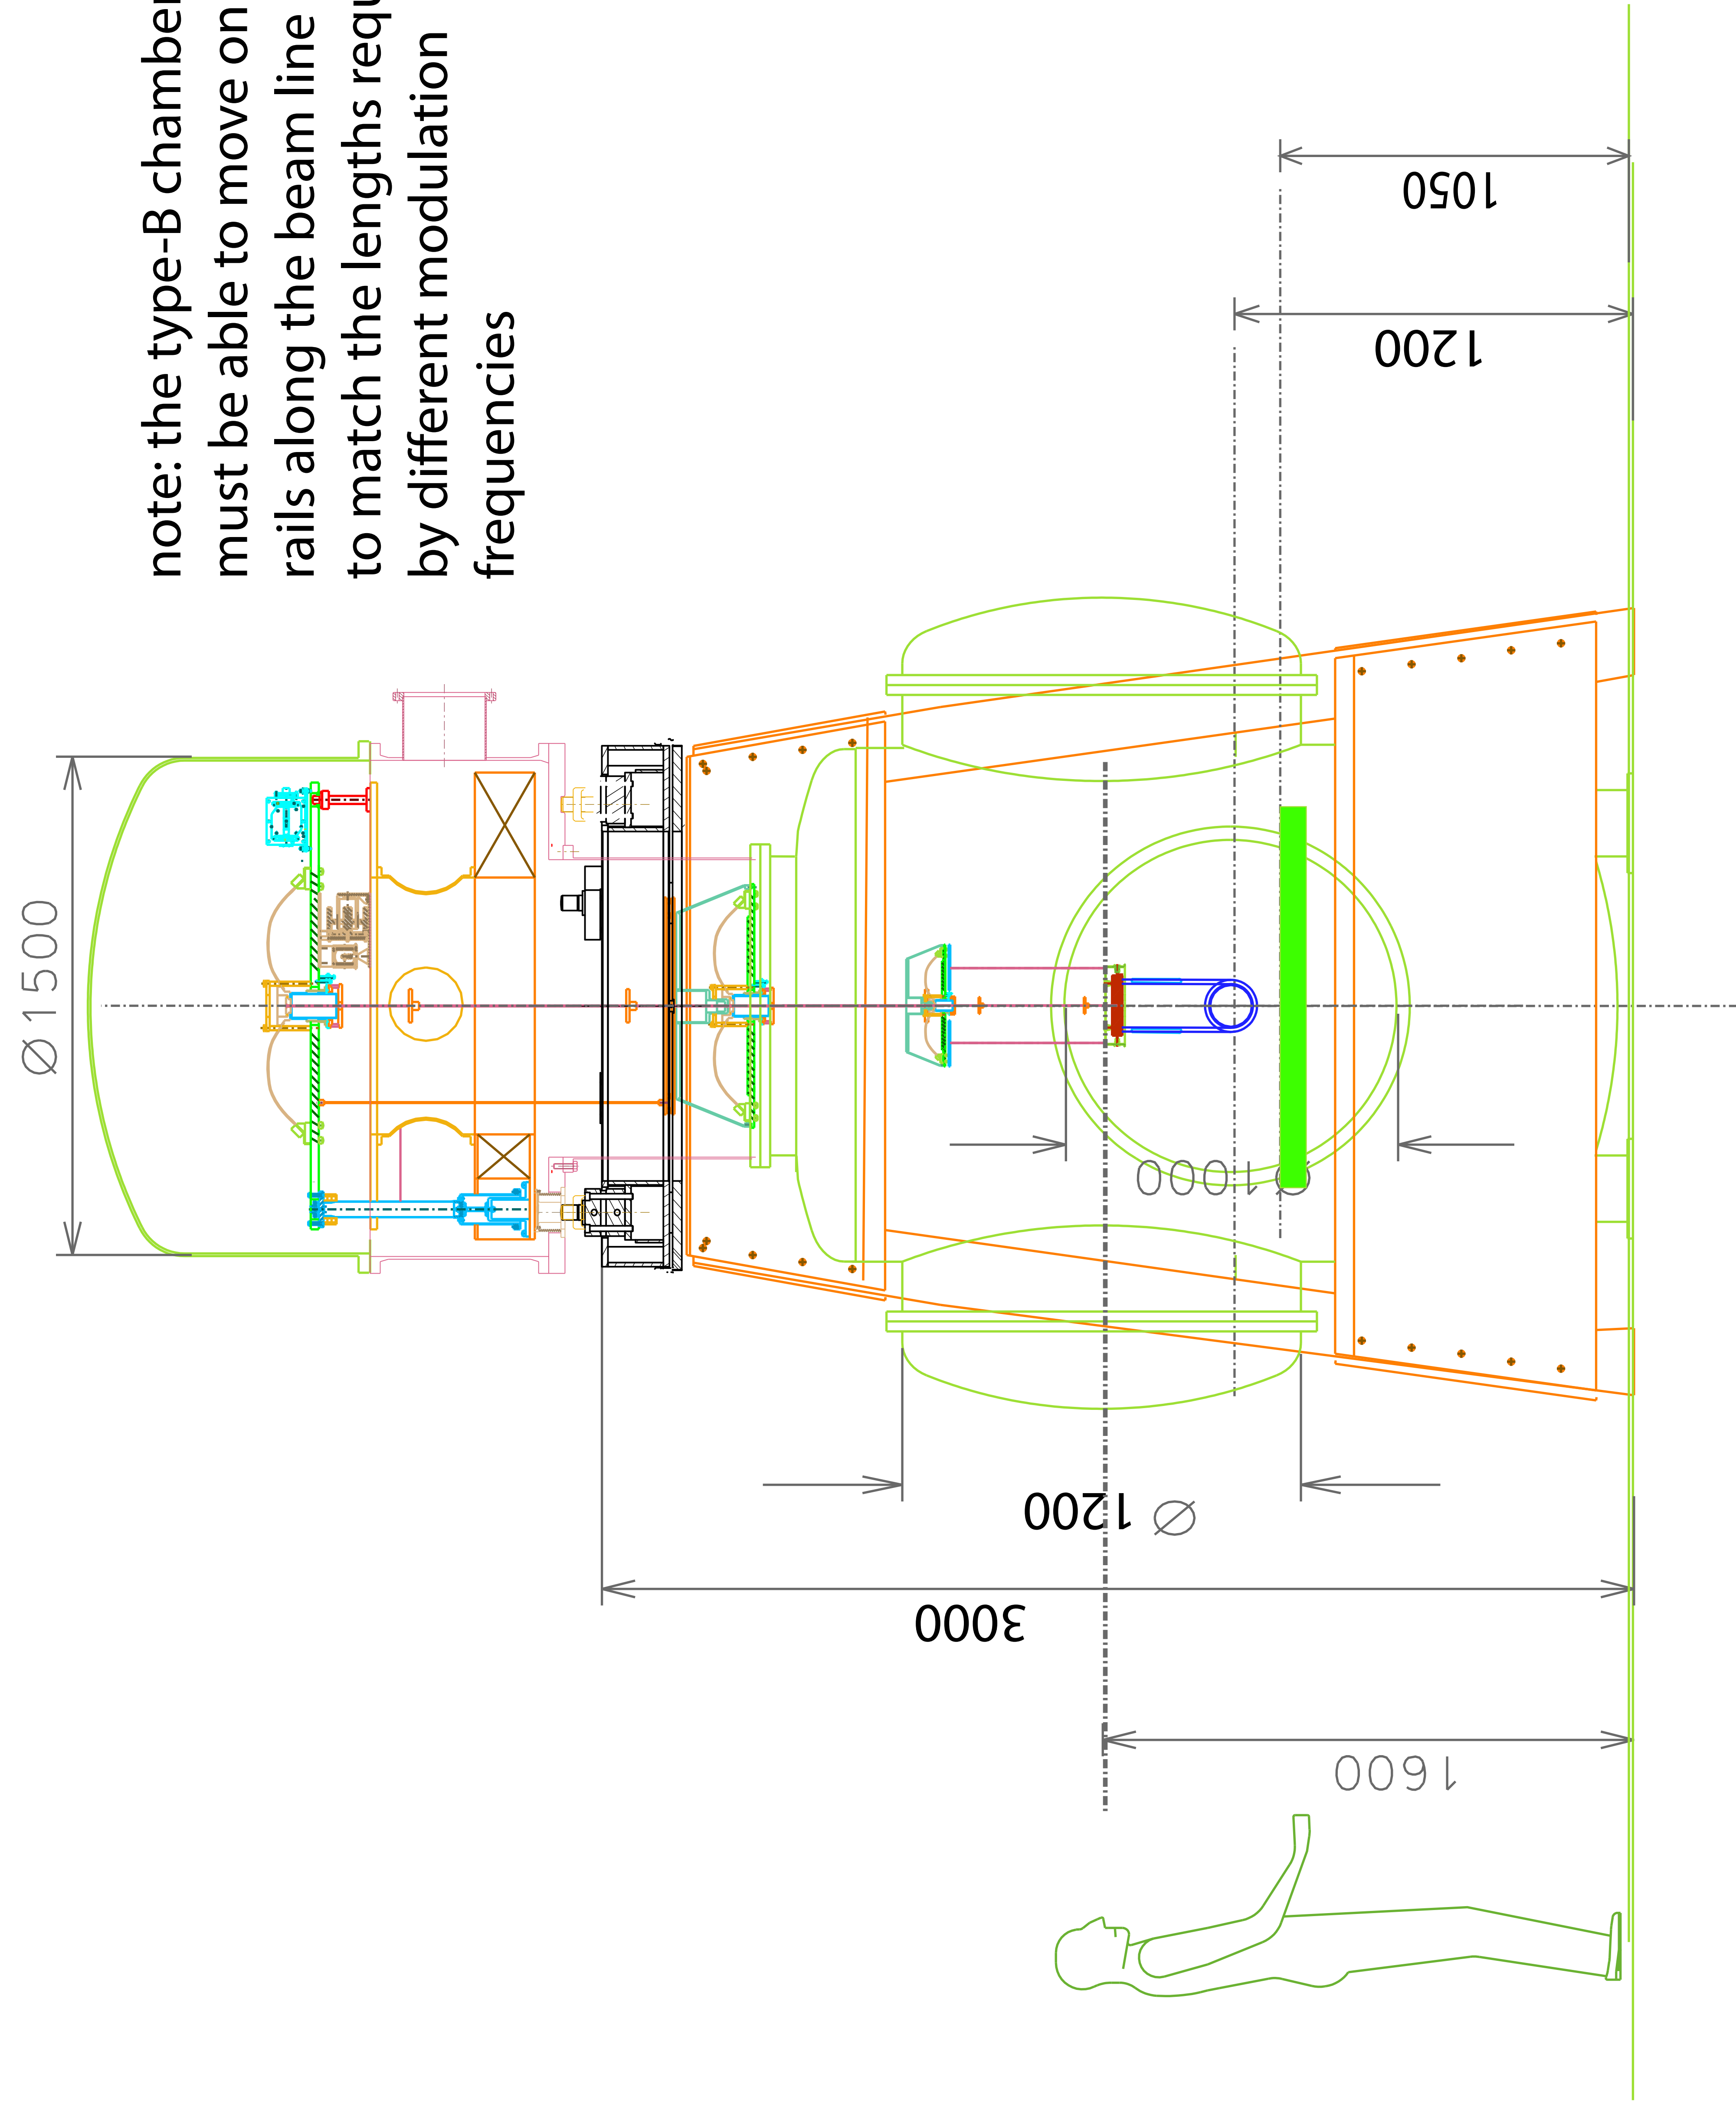

Longitudinal separation between closest towers: 2700
transversal shift: 260