Status of KAGRA

- **Underground** and **Cryogenic** interferometric gravitational-wave detector at Kamioka, Japan
- KAGRA will finish installation by the end of March, 2019.
- KAGRA plans to join LV Observation Run 3 from fall 2019.




Hisaaki Shinkai (Osaka Inst. Tech.)
KAGRA Scientific Congress, board chair



KAGRA (Kamioka GW Observatory)

◆ **Underground** and **Cryogenic** interferometric gravitational-wave detector at Kamioka, Japan

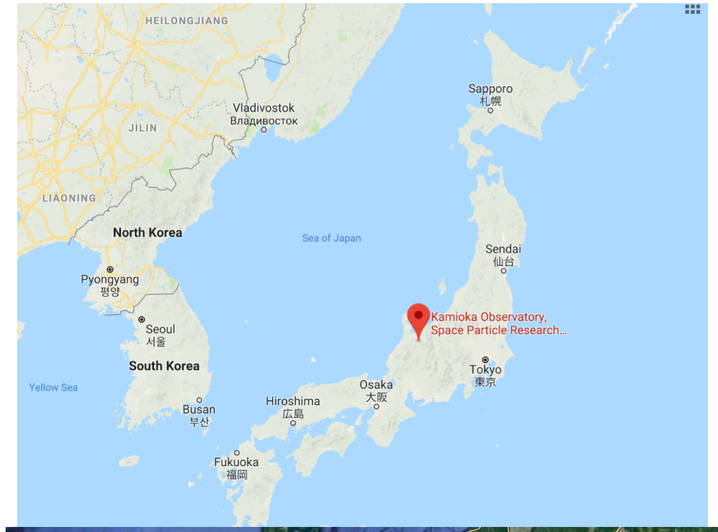



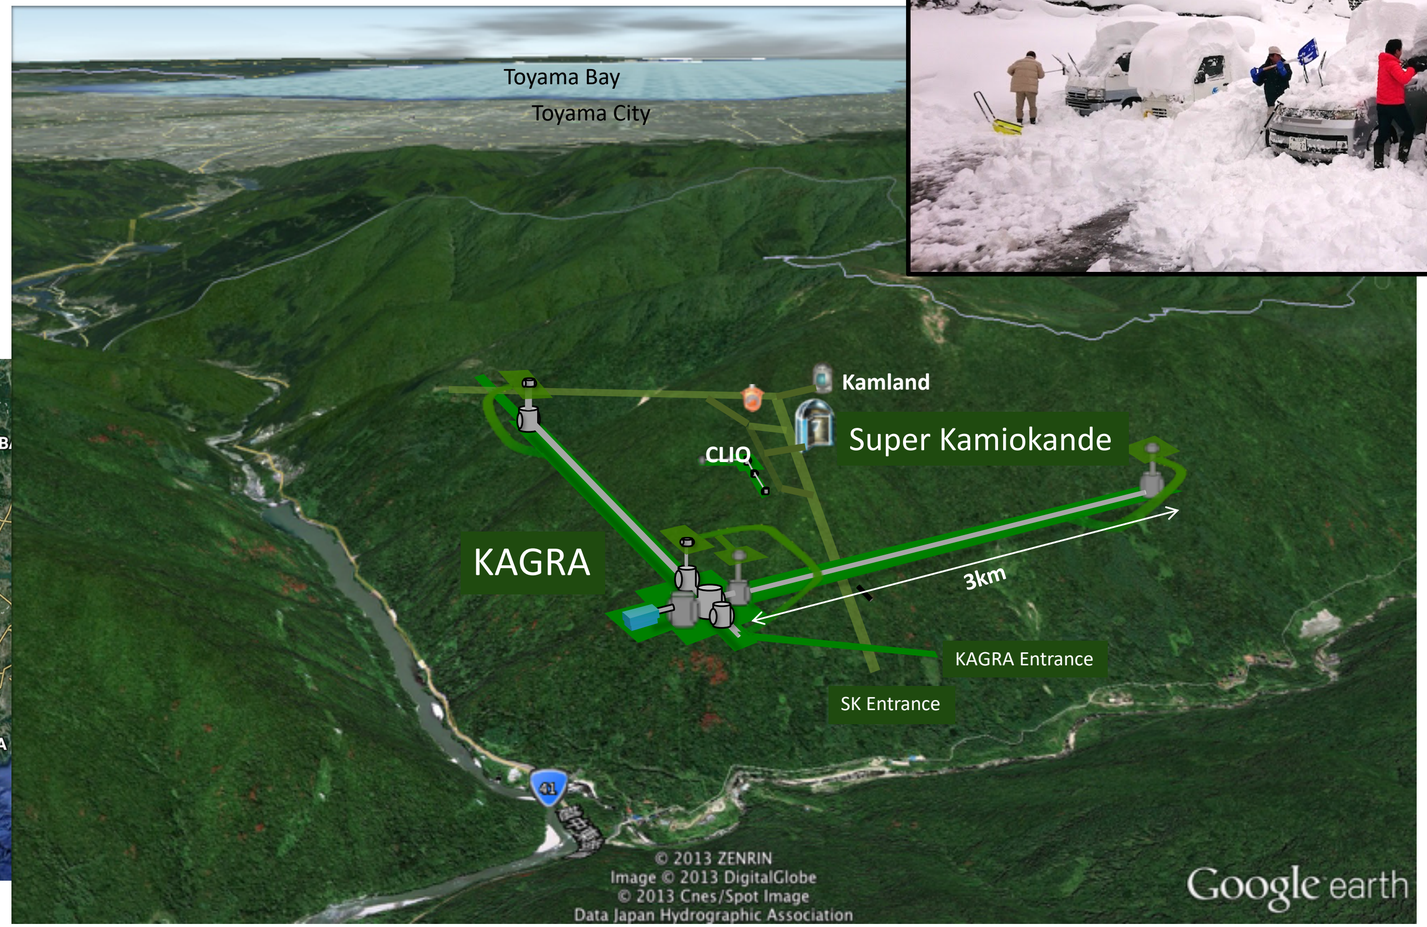




fig. by Keiko Kokeyama

KAGRA (Kamioka GW Observatory)

Nature Astronomy, 3 (2019) 35.
[arXiv:1811.08079]

nature astronomy
PERSPECTIVE
https://doi.org/10.1038/s41550-018-0658-y

KAGRA: 2.5 generation interferometric gravitational wave detector

KAGRA collaboration

The recent detections of gravitational waves (GWs) reported by the LIGO and Virgo collaborations have made a significant impact on physics and astronomy. A global network of GW detectors will play a key role in uncovering the unknown nature of the sources in coordinated observations with astronomical telescopes and detectors. Here we introduce KAGRA, a new GW detector with two 3 km baseline arms arranged in an 'L' shape. KAGRA's design is similar to the second generations of Advanced LIGO and Advanced Virgo, but it will be operating at cryogenic temperatures with sapphire mirrors. This low-temperature feature is advantageous for improving the sensitivity around 100 Hz and is considered to be an important feature for the third-generation GW detector concept (for example, the Einstein Telescope of Europe or the Cosmic Explorer of the United States). Hence, KAGRA is often called a 2.5-generation GW detector based on laser interferometry. KAGRA's first observation run is scheduled in late 2019, aiming to join the third observation run of the advanced LIGO–Virgo network. When operating along with the existing GW detectors, KAGRA will be helpful in locating GW sources more accurately and determining the source parameters with higher precision, providing information for follow-up observations of GW trigger candidates.

Seeing is believing. We were reminded of this proverb when we received the news of the discovery of GW150914, the first direct detection of gravitational waves (GWs)[1]. The existence of GWs has been believed since Russel Hulse and Joseph Taylor discovered the binary pulsar PSR B1913 + 16 in 1974 (ref. [2]). The long-term radio observation of this system has shown that the observed orbital decay is well described by the energy/angular momentum loss due to GW emission as predicted by Einstein in 1915 (ref. [3]).

Figure 1 shows the location of KAGRA in Kamioka, Japan. The interferometer shares the area with the well-known neutrino detectors Super-Kamiokande and KamLAND. Kamioka is a small town located 1.5 hour driving distance from the city of Toyama, with its biggest claim to fame being an old mine.

Compared with existing laser interferometers, KAGRA is technologically unique in two features. Firstly, it is located in an underground site to reduce seismic noise. Secondly, KAGRA's test masses

NEWS IN FOCUS

PHYSICS Tantalizing signs of superconductivity at near-room temperature **p.12**

POLITICS Violence in Nicaragua engulfs scientists **p.11**

NEW YEAR Gene-editing, open access and seals with sensors to shape 2019 **p.13**

MATERIALS The scramble to understand a twisted form of graphene **p.15**



THE ASAHI SHIMBUN VIA GETTY

Japan's Kamioka Gravitational Wave Detector is scheduled to start up in 2019, joining a global network of interferometers.

PHYSICS

Japan to begin pioneering hunt for gravitational waves

The underground KAGRA detector will deploy ambitious technology to improve sensitivity.

BY DAVIDE CASTELVECCHI

Inside a house-sized scaffolding wrapped in thick plastic sheets, Takayuki Tomaru is in full clean-room attire. The physicist, who works at the High Energy Accelerator Research Organization (KEK) in Tsukuba, Japan, is performing one of the most delicate and crucial tasks in the construction of a gravitational-wave observatory: installing one of the machine's four mirrors, each a 23-kilogram cylinder of solid sapphire known as a test mass. When operations begin later this year, their job will be to bounce infrared laser beams back and forth along two 3-kilometre, high-vacuum pipes, ready to sense the passage of gravitational waves (see 'Japan's wave hunter').

The ¥16.4-billion (US$148-million) observatory — Japan's Kamioka Gravitational Wave Detector (KAGRA) — will work on the same principle as the two detectors of the Laser Interferometer Gravitational-Wave Observatory (LIGO) in the United States and the Virgo solo machine in Italy. In the past few years, these machines have begun to detect gravitational waves — long-sought ripples in the fabric of space-time, created by cataclysmic cosmic events such as the merging of two black holes or the collision of two neutron stars.

With the addition of KAGRA, the growing global network of detectors will enable astrophysicists to locate the position of these feeble cosmic signals in the sky with greatly increased precision. They will be able to dissect the waves' properties, such as how they are ▶

3 JANUARY 2019 | VOL 565 | NATURE | 9

© 2019 Springer Nature Limited. All rights reserved.

Nature 565 (2019 Jan) 30

ScienceNews
MAGAZINE OF THE SOCIETY FOR SCIENCE & THE PUBLIC

SCIENCE NEWS NEEDS YOU
Support nonprofit journalism
Subscribe now
SUBSCRIBE

Search Science News...

MENU TOPICS BLOGS EDITOR'S PICKS MAGAZINE

LATEST | MOST VIEWED

NEWS IN BRIEF
Scientists have chilled tiny electronics to a record low temperature
BY EMILY CONOVER MARCH 08, 2019

SCIENCE VISUALIZED
How droplets of oil or water can glow vibrant colors
BY MARIA TEMMING MARCH 08, 2019

MYSTERY SOLVED
Microwaved grapes make fireballs, and scientists now know why
BY EMILY CONOVER MARCH 08, 2019

REVIEWS & PREVIEWS
'Skeleton Keys' unlocks the history and mysteries of bones
BY SID PERKINS MARCH 08, 2019

NEWS IN BRIEF
Merging magnetic blobs fuel the sun's huge plasma eruptions
BY JESS GROSSMAN MARCH 07, 2019

SOCIETY UPDATE
The latest stories from *Science News for Students*

NEWS
Human encroachment threatens chimpanzee culture
BY SUJATA GUPTA MARCH 07, 2019

NEWS
How helpful gut microbes send signals that they are friends, not foes

NEWS PHYSICS, ASTRONOMY, GRAVITATIONAL WAVES

A new gravitational wave detector is almost ready to join the search

Japan's KAGRA experiment tests new techniques for spotting ripples in spacetime
BY EMILY CONOVER 7:00AM, JANUARY 18, 2019



DEEP AND COLD Chilled mirrors and an underground hideout (shown) should help the KAGRA experiment in its upcoming search for gravitational waves.

ICRR, UNIV. OF TOKYO

Magazine issue: Vol. 195, No. 3, February 16, 2019, p. 8

Science News 195 (2019 Feb) 8

https://www.sciencenews.org/

Organization of KSC (KAGRA Scientific Congress)



Takaaki Kajita



Yoshio Saito

PI

EO

SEO

sharing information & idea

KSC board

KAGRA Scientific Congress (KSC) organization chart 2019/March 10

* Hisaaki Shinkai
* Chunglee Kim
Sadakazu Haino
Yuta Michimura
Nobuyuki Kanda (EO)
Takahiro Yamamoto (PD)
Koji Nagano (Student)
Zong-Hong Zhu (region)
Hyung-Won Lee (region)
Ray-Kuang Lee (region)



Data Analysis Committee (DAC)

* Hideyuki Tagoshi
+ WGs chairs/vice chairs
+ Hisaaki Shinkai (board)

Compact Binary Coalescence	Continuous Wave	Burst Wave	Stochastic Wave	Computing & Software	Calibration	Detchar
* Hideyuki Tagoshi Kipp Cannon Hyung-Won Lee Tjonnie Li	* Yousuke Itoh	* Kazuhiro Hayama	* Guo-Chin Liu Sachiko Kuroyanagi	* Ken-ichi Ohara Kazuki Sakai	* Yuki Inoue	* TBD

Joint Editorial board
* TBD

Joint Run Planning Committee
Yousuke Itoh
Shinji Miyoki

LVC-KAGRA taskforce
Yoshio Saito (leader, project manager)
Hideyuki Tagoshi (Data analysis)
Takahiro Yamamoto (Calibration)
Osamu Miyakawa (commissioning)
Hisaaki Shinkai (MoU)

Joint Meeting Committee
* TBD

Joint Detection Committee
* TBD

KAGRA collaboration



98 groups, 15 countries
250+ active members

98 groups, 15 countries
250+ active members

Latest paper has 197 authors.

227 members applied for authorlist 2018

Organize Face-to-Face meeting
3 times (April/August/Dec) / year

F2F April 2019 @ U. Tokyo, Japan

F2F Aug. 2019 @ U. Toyama, Japan

Organize International Workshop
2 times / year

KIW5 Feb. 2019 @ Perugia, Italy

KIW6 June 2019 @ Wuhan, China

KIW7 April 2020 @ NCU, Taiwan

http://gwwiki.icrr.u-tokyo.ac.jp/JGWwiki/KAGRA


Brief History of KAGRA

calendar year	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021
Project Start												
Tunnel Excavation												
installation												
adv vibration isolation, optics, cryo.…												
operation												


iKAGRA

bKAGRA phasae-1


phase-2 O3

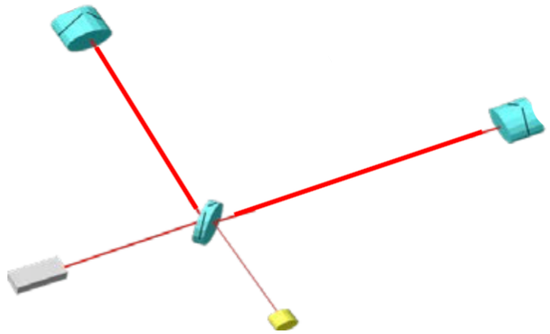

[arXiv:1712.00148]

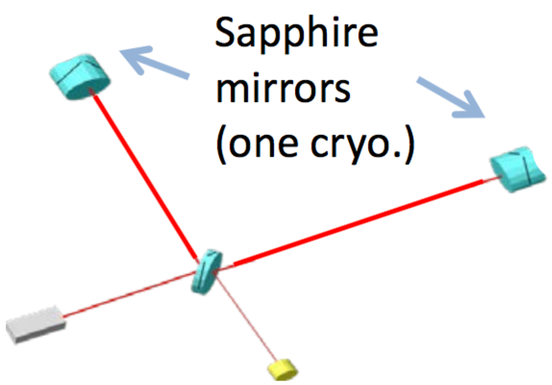



[arXiv:1901.03569]

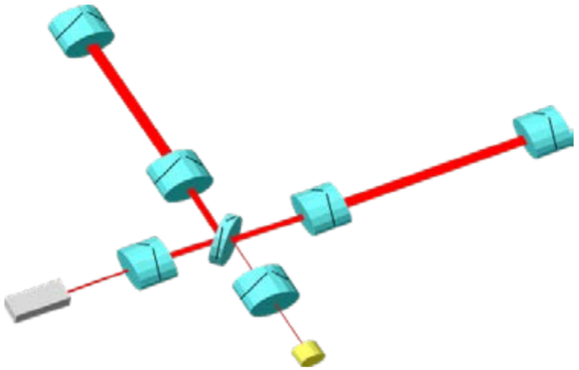


bKAGRA phase-1 operation (April & May 2018)


[arXiv:1901.03569]

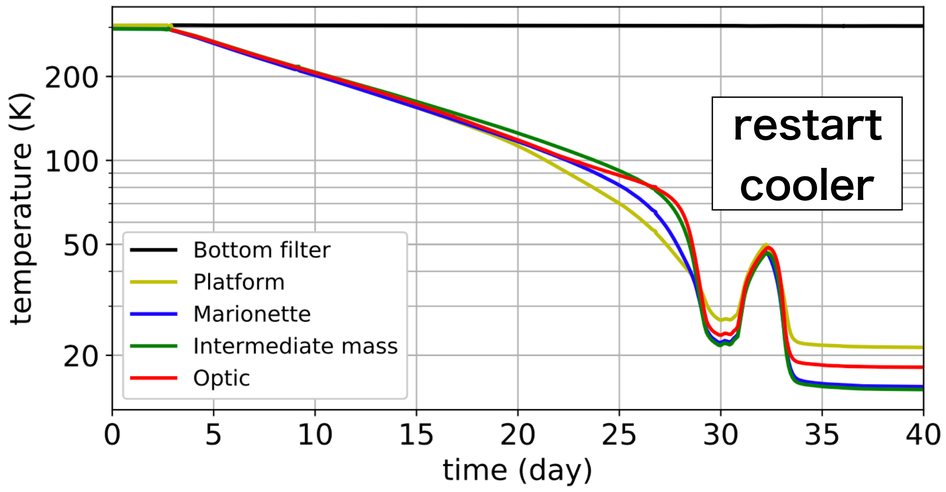


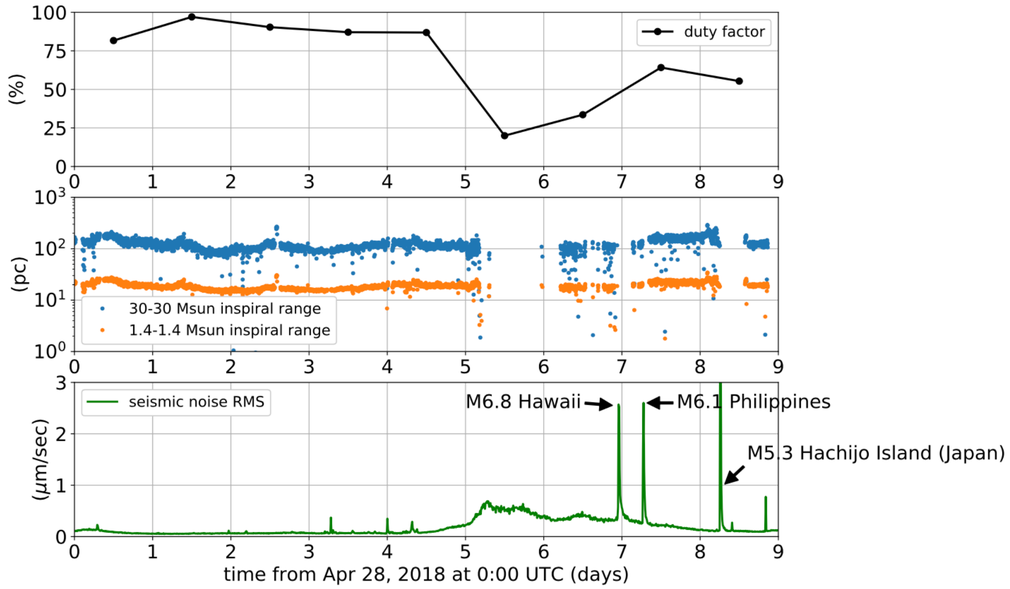


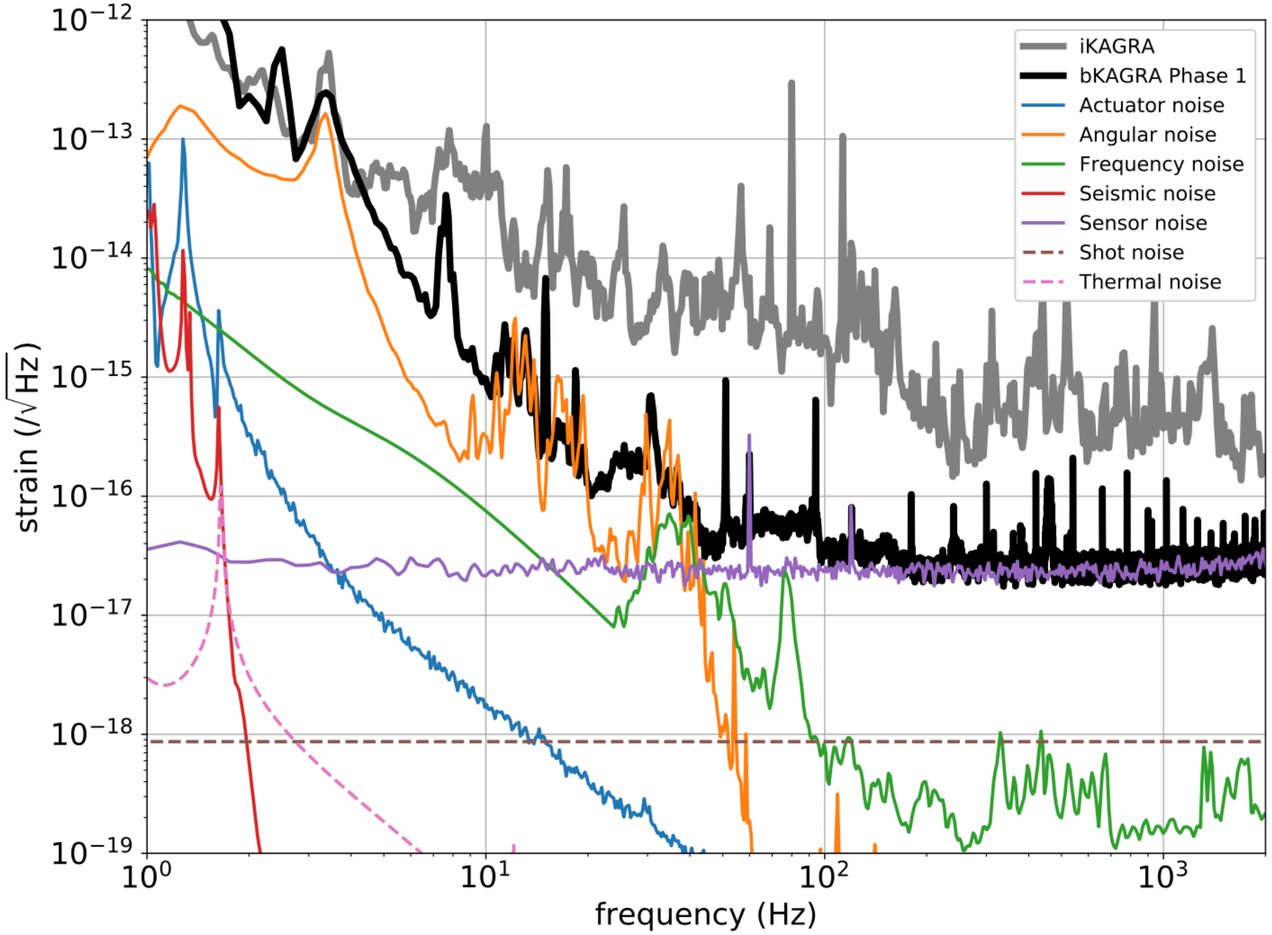

Target Sensitivity & Schedule

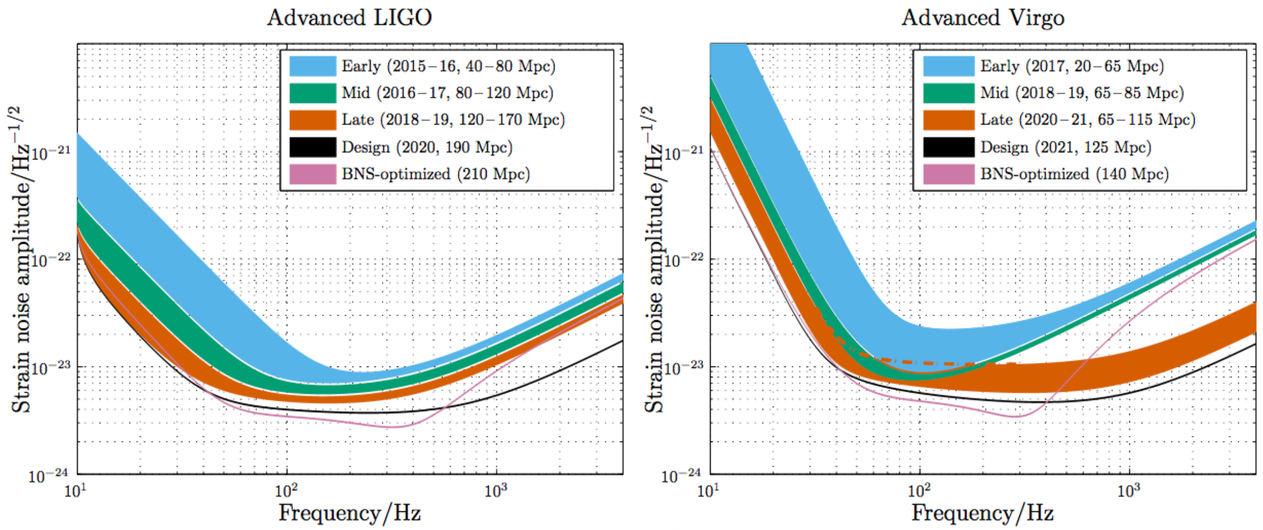


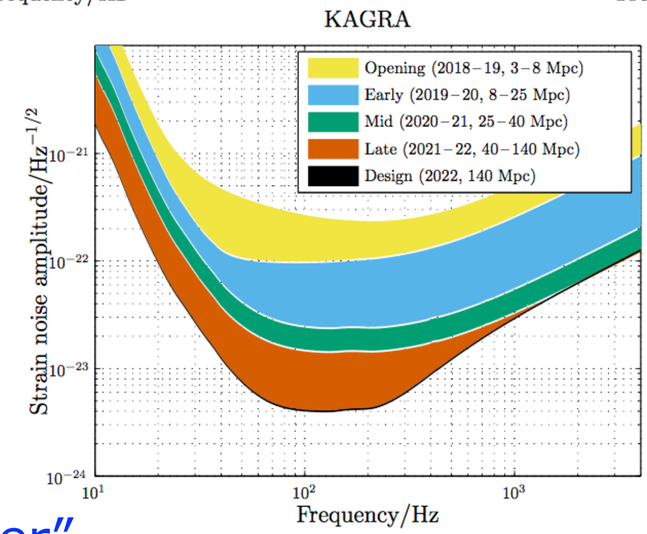

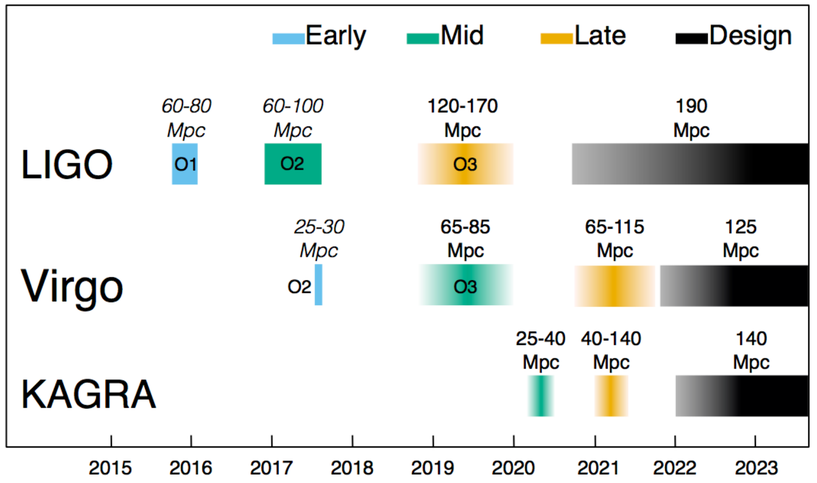

[1304.0670v4]

[draft]

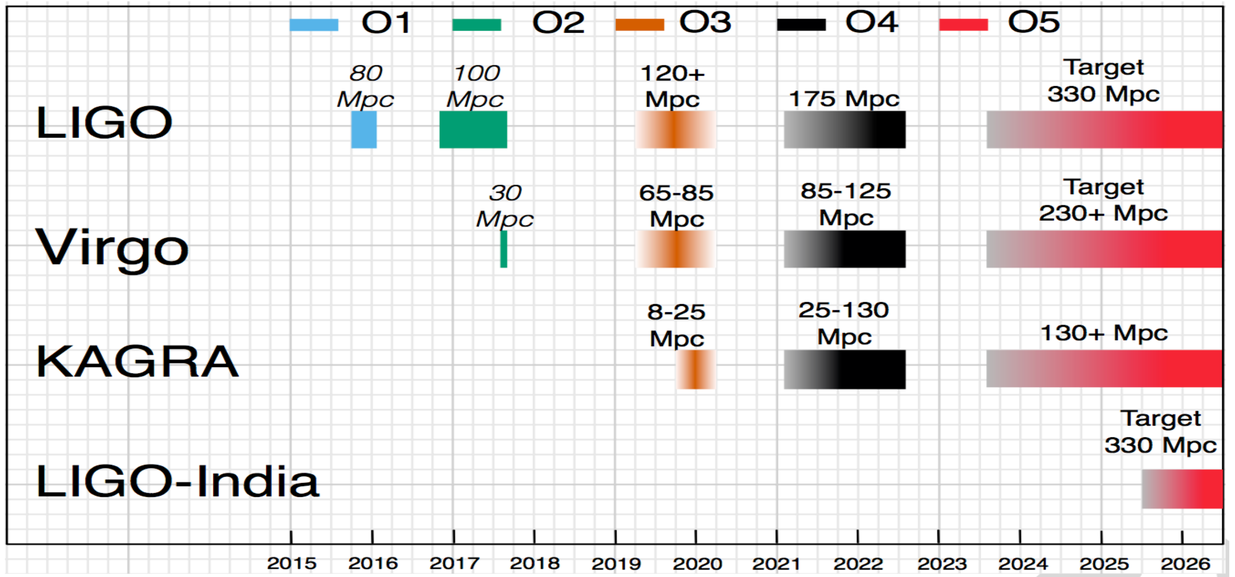


“Scenario Paper”

Living Rev Relativ (2018) 21:3

https://doi.org/10.1007/s41114-018-0012-9

[1304.0670v4]

Roadmap to join O3: Plan A & B

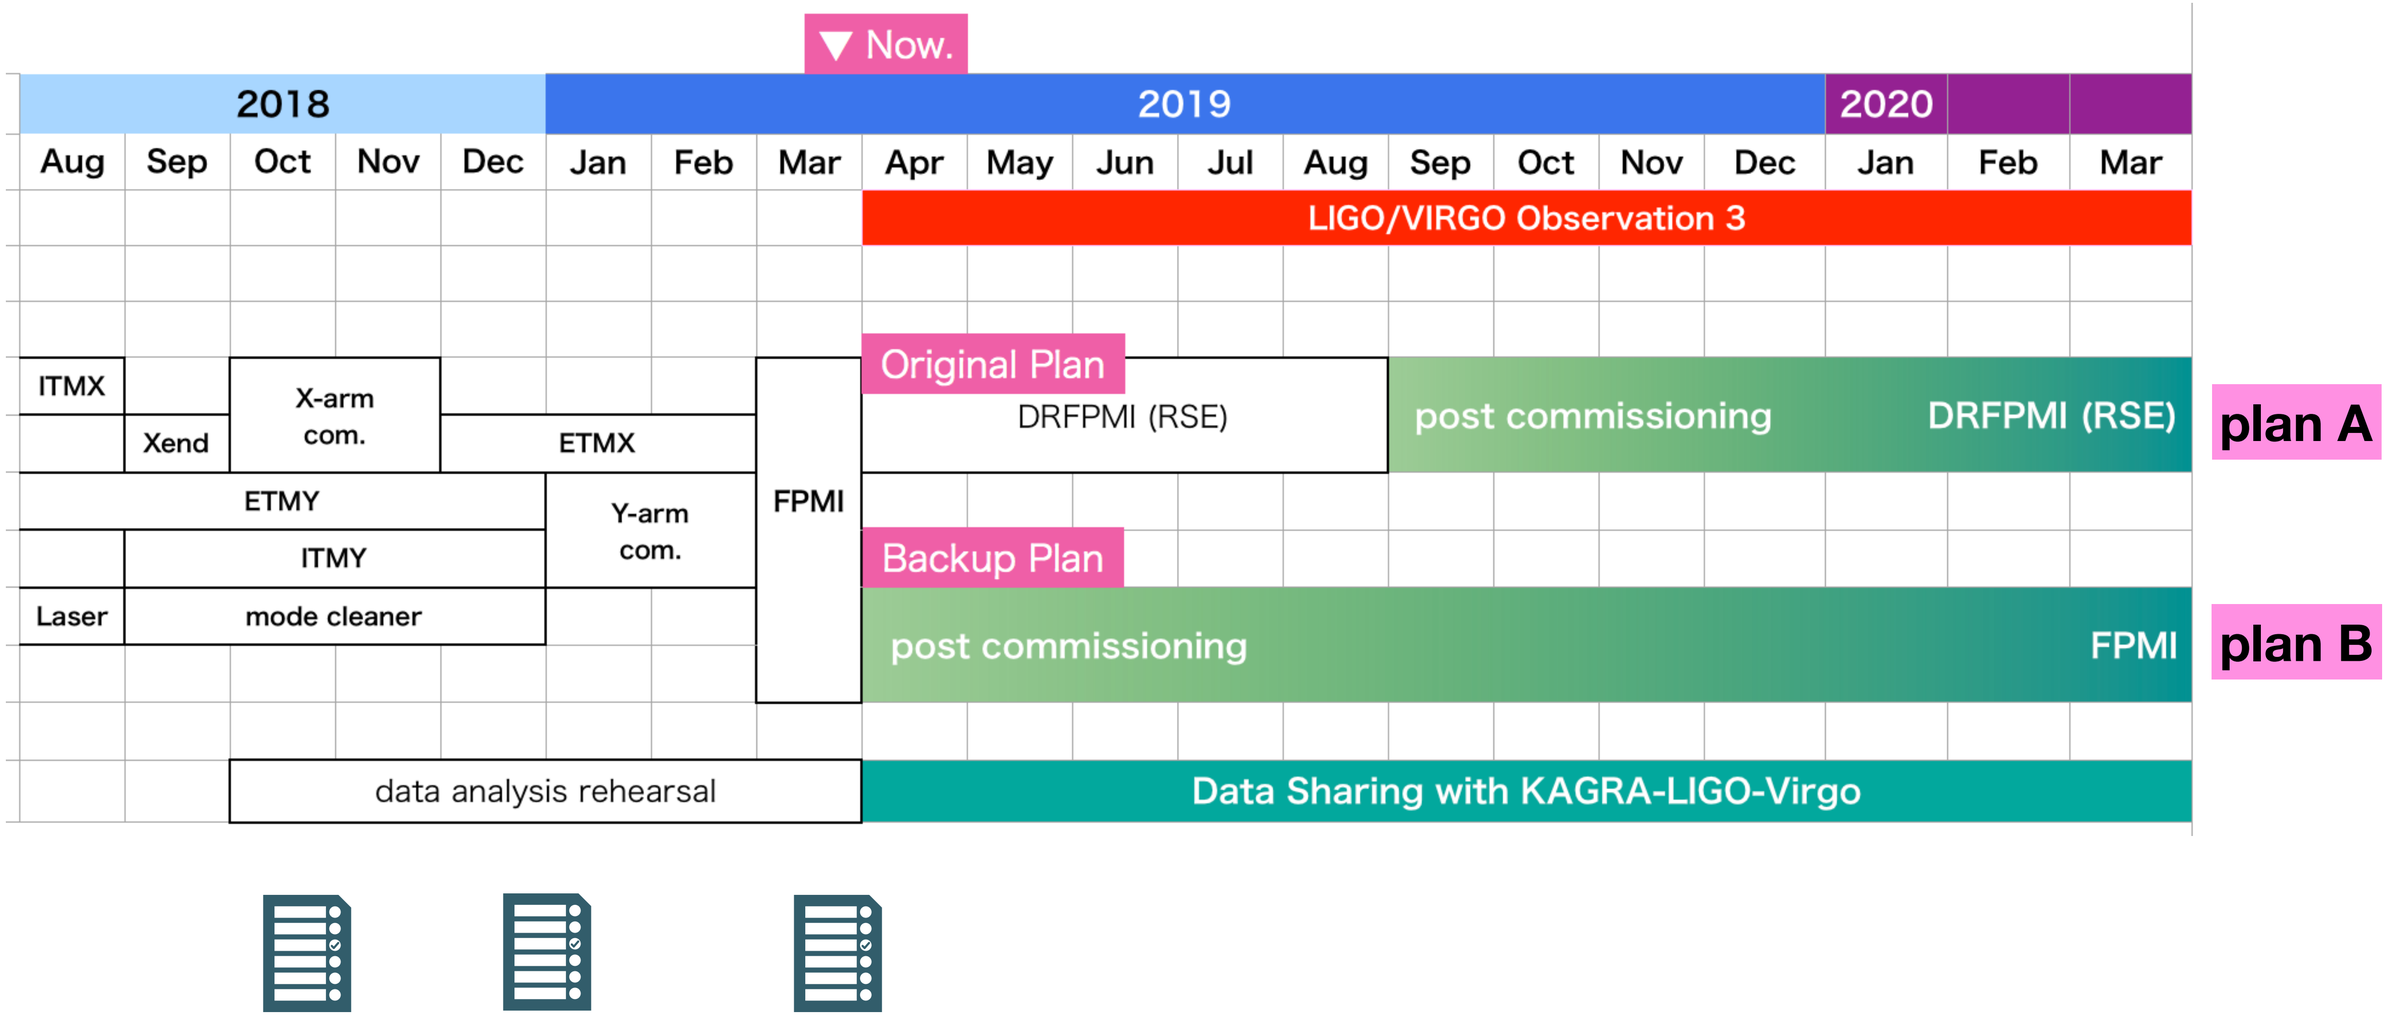


— either DRFPMI(RSE) (-25Mpc, Oct?) or FPMI (-10Mpc, June?)
checking points: Sep/2018, Dec/2018 and Mar/2019


bKAGRA configuration & installation 2018-2019


bKAGRA configuration
- Cryogenic test masses
- 3 km arm cavities
- RSE with power recycling

160222_SAITO

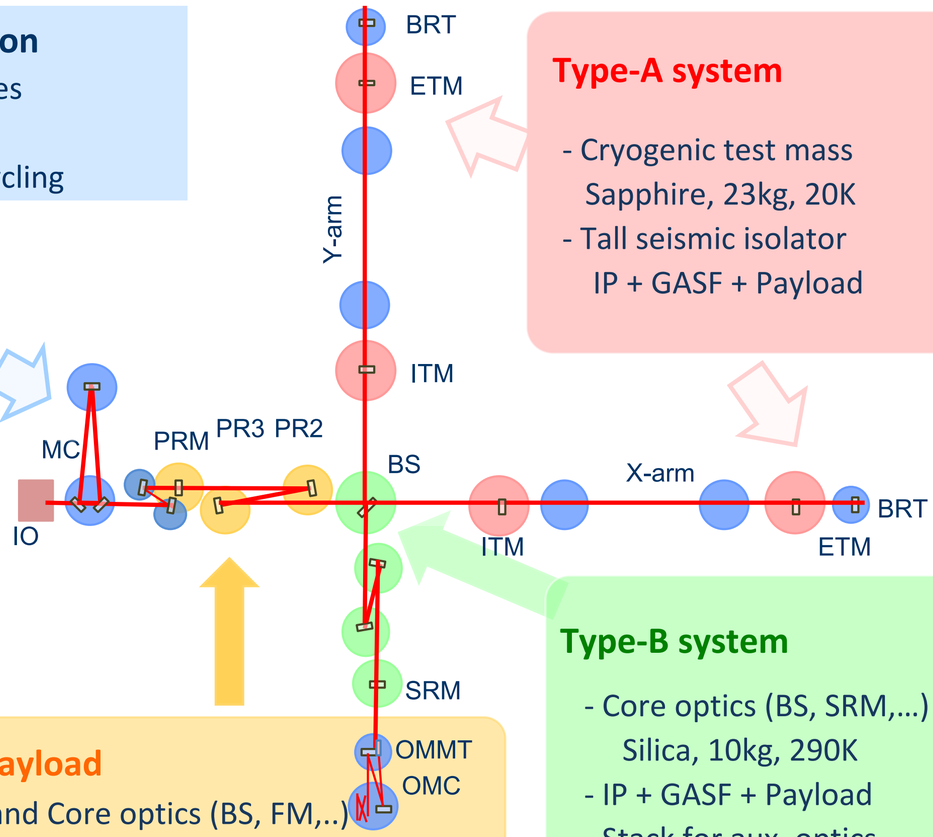


Type-A system
- Cryogenic test mass
  Sapphire, 23kg, 20K
- Tall seismic isolator
  IP + GASF + Payload






Type-C system
- Mode cleaner
  Silica, 0.5kg, 290K
- Stack + Payload

Type-B system
- Core optics (BS, SRM,…)
  Silica, 10kg, 290K
- IP + GASF + Payload
- Stack for aux. optics






Type-Bp payload
- Test mass and Core optics (BS, FM,..)
  Silica, 10kg, 290K
- Seismic isolator
  Table + GASF + Type-B Payload

【VIS】


ALL the large suspensions have been installed!

Tunings are ongoing along with the alignment.

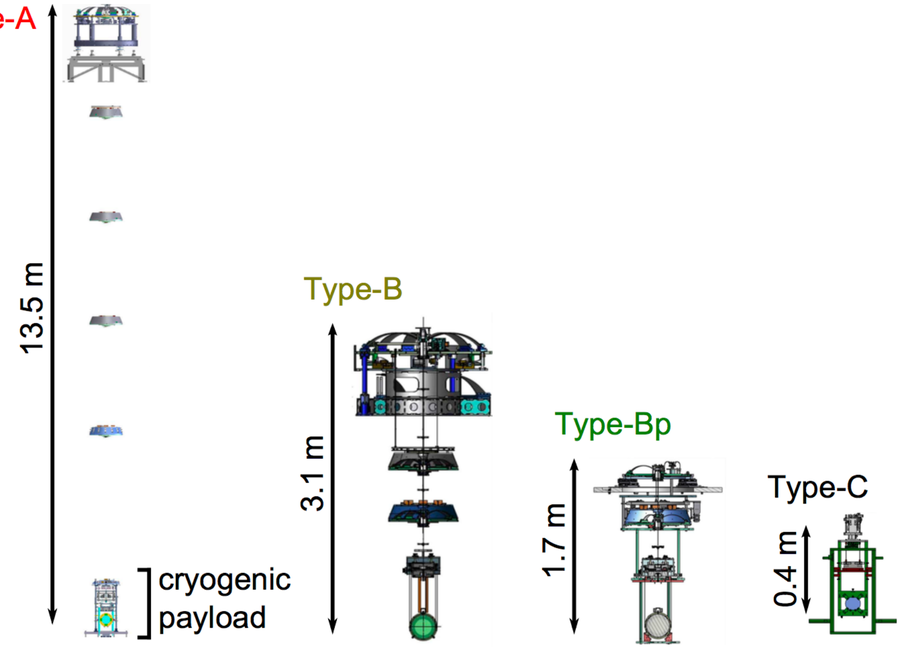


【Mirror】

ALL Sapphire mirrors are installed.

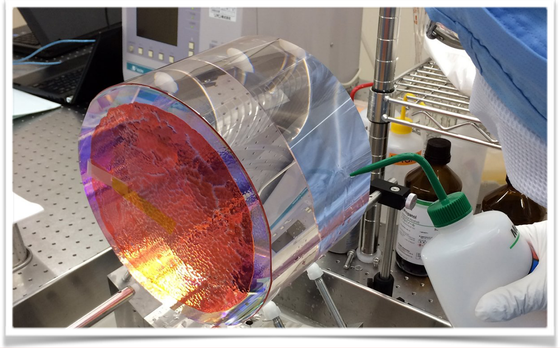


bKAGRA configuration & installation 2018-2019

bKAGRA configuration
- Cryogenic test masses
- 3 km arm cavities
- RSE with power recycling

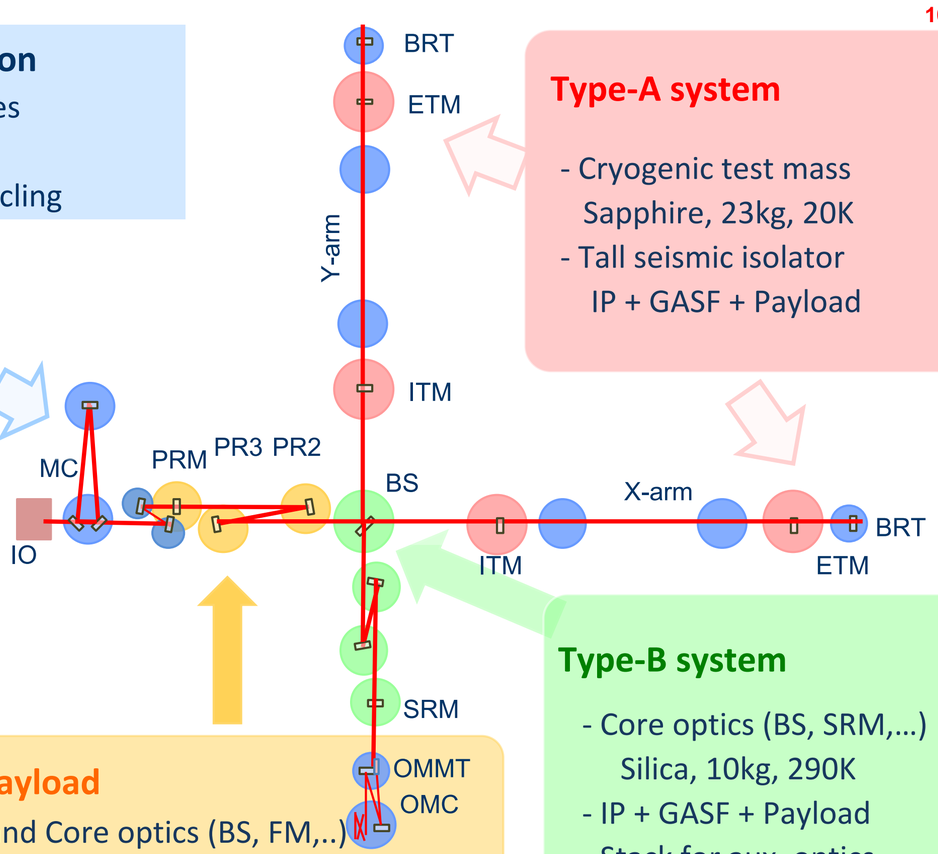


Type-A system
- Cryogenic test mass
  Sapphire, 23kg, 20K
- Tall seismic isolator
  IP + GASF + Payload



Type-C system
- Mode cleaner
  Silica, 0.5kg, 290K
- Stack + Payload



Type-B system
- Core optics (BS, SRM,…)
  Silica, 10kg, 290K
- IP + GASF + Payload
- Stack for aux. optics




Type-Bp payload
- Test mass and Core optics (BS, FM,..)
  Silica, 10kg, 290K
- Seismic isolator
  Table + GASF + Type-B Payload



【VIS】

ALL the large suspensions have been installed!
Tunings are ongoing along with the alignment.


In Feb., all SRs has been installed!

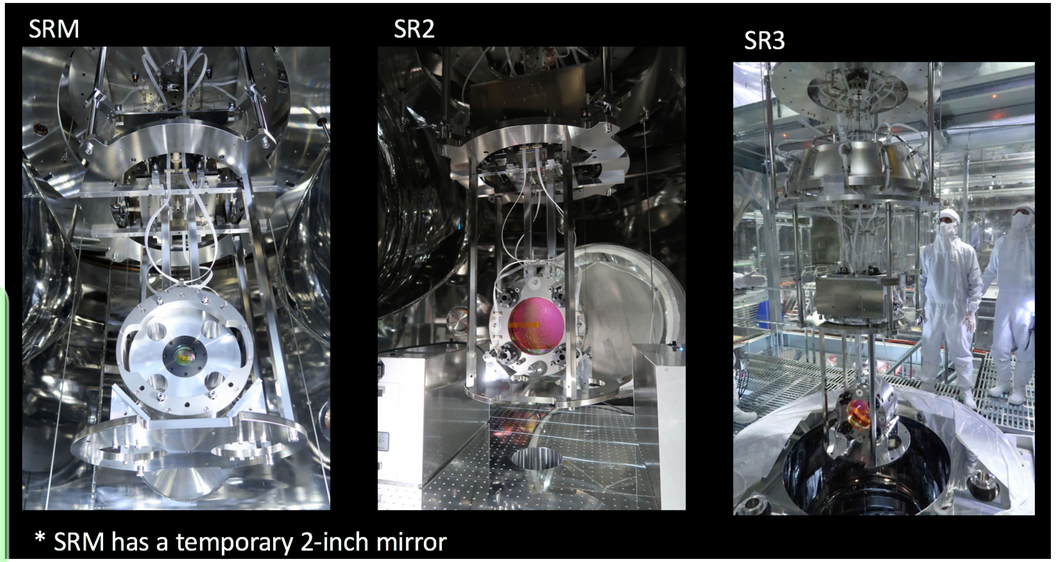

【Mirror, CRYO】

ALL Sapphire mirrors are installed.

bKAGRA configuration & installation 2018-2019

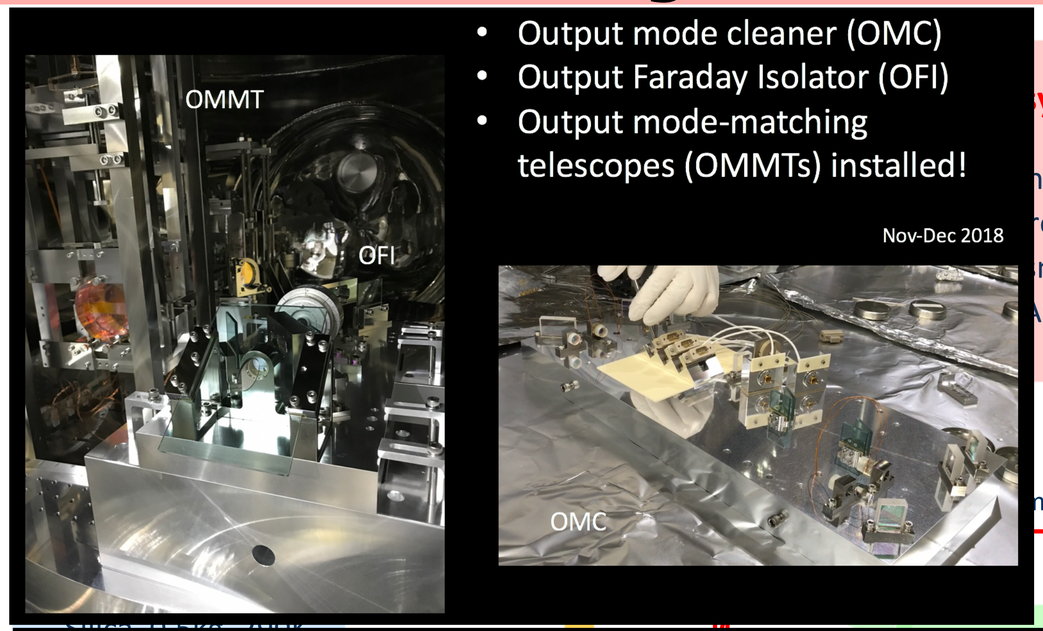



- Output mode cleaner (OMC)
- Output Faraday Isolator (OFI)
- Output mode-matching telescopes (OMMTs) installed!

Nov-Dec 2018

ystem


ic test mass
e, 23kg, 20K
mic isolator
SF + Payload








m

(BS, SRM,...)
, 290K
Payload
x. optics



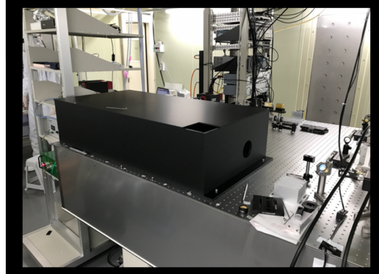

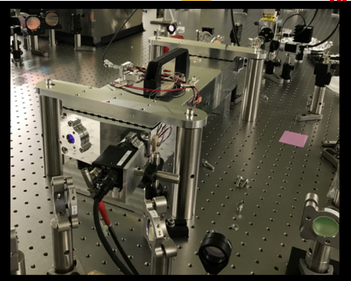

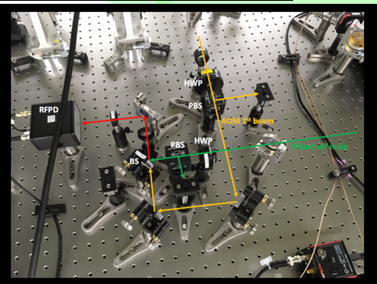


- Input mode cleaner was tested with 10W
- Intensity stabilization is being commissioned
- Frequency stabilization (mode cleaner & reference cavity) has been operating since phase1

【VIS】

ALL the large suspensions have been installed!
Tunings are ongoing along with the alignment.

In Feb., all SRs has been installed!

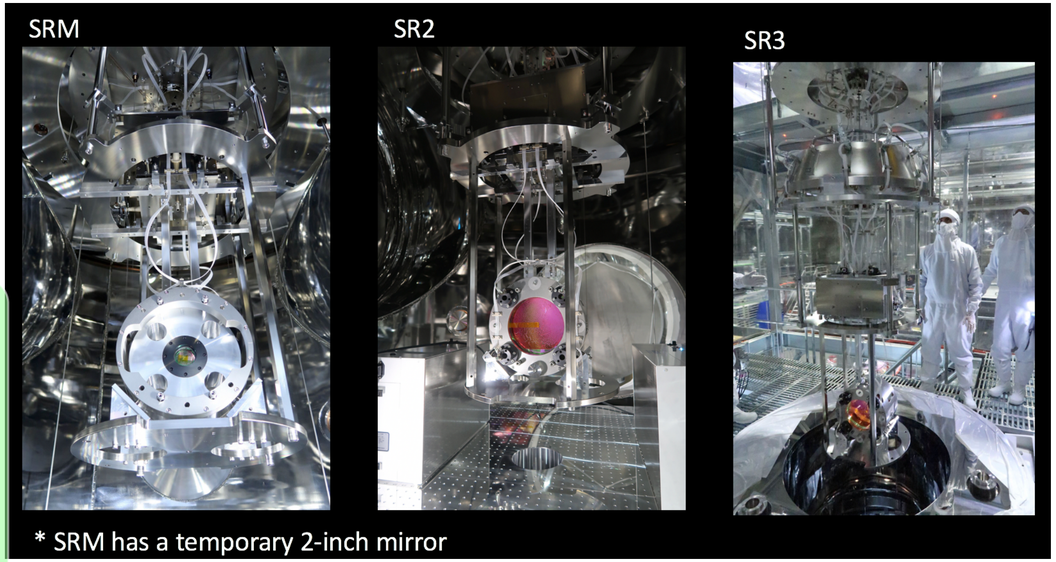


* SRM has a temporary 2-inch mirror

【Mirror, CRYO】

ALL Sapphire mirrors are installed.


【Input Optics】40W laser, PMC, Mach-Zehnder type modulation system, PM&AM monitor system are installed.
【Output Optics】Mode cleaner, Faraday isolater, mode-matching telescopes are installed.

bKAGRA configuration & installation 2018-2019

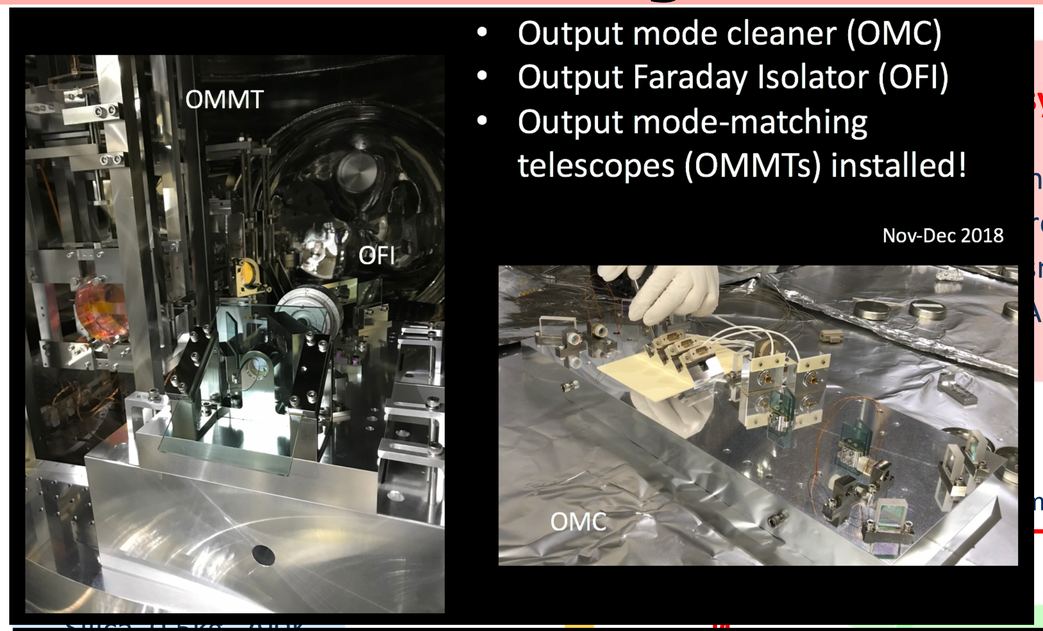



- Output mode cleaner (OMC)
- Output Faraday Isolator (OFI)
- Output mode-matching telescopes (OMMTs) installed!

Nov-Dec 2018

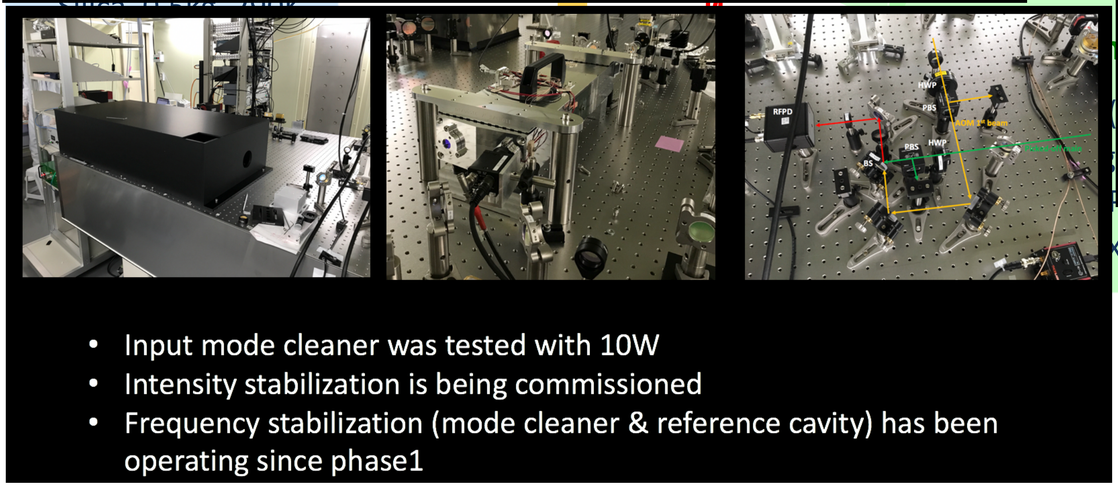

- Input mode cleaner was tested with 10W
- Intensity stabilization is being commissioned
- Frequency stabilization (mode cleaner & reference cavity) has been operating since phase1



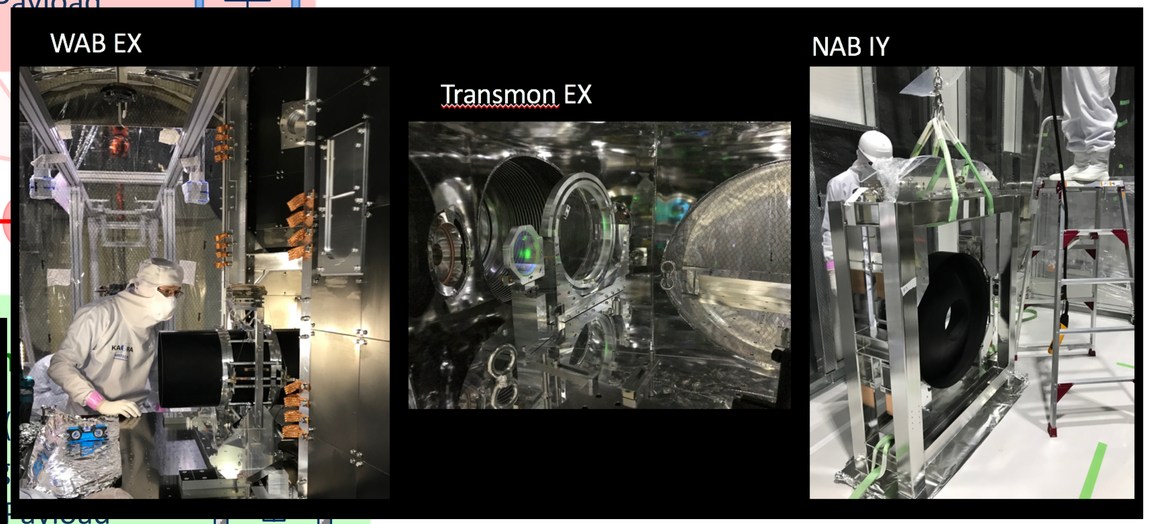

【VIS】
ALL the large suspensions have been installed!
Tunings are ongoing along with the alignment.

In Feb., all SRs has been installed!

【Auxiliary Optics】3/4 installed.

【Mirror, CRYO】
ALL Sapphire mirrors are installed.


【Input Optics】40W laser, PMC, Mach-Zehnder type modulation system, PM&AM monitor system are installed.
【Output Optics】Mode cleaner, Faraday isolater, mode-matching telescopes are installed.

bKAGRA configuration & installation 2018-2019

KAGRA Scientific Congress Newsletter No. 3 2018/12/01

(Right) Photon Calibrator X-end installation completed. July 25. [JGW-G1809009]
In photo, Takaaki Yokozawa, Yuki Inoue, Takahiro Yamamoto, and Chihiro Kozakai.



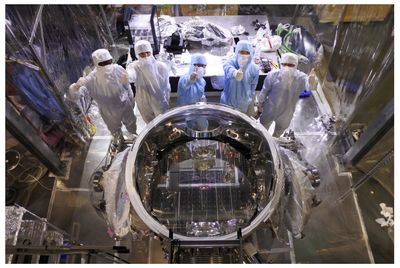


(Left) Installed the BRT part on the TMS-VIS in the EXT chamber at the X-end! [klog 06342].
In photo, Fumihiro Uraguchi, Koji Nagano, Kunihiko Hasegawa, Kenta Tanaka, Naoki Kita, and Tomotada Akutsu.

We did it! in 2018


(Right) SR3 Installation, July 20. [klog 05569]
Panwei Huang, Naoatsu Hirata, Terrence Tsang, Fabian Peña, Mark Barton, Ryohei Kozu, and Enzo Tapia. (plus Guiguo observing)



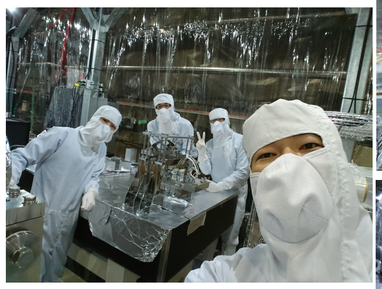

(Above) OMC installation succeeded, October 18. [klog 06612]
In photo, Sotatsu Otabe, Kohei Kusayanagi, Hiraku Sasaki, and Kentaro Somiya.

(Right) Nov. 9, the last installation of cryogenic payload was completed. The photo at Y-front was distributed in [kagra 02500].
In photo, Masahiro Takahashi, Takayuki Tomaru and Sakae Araki.

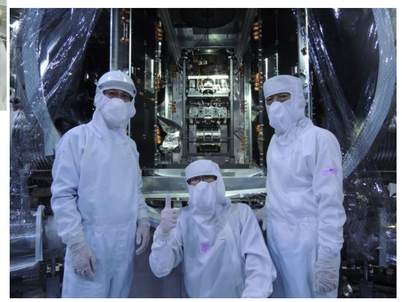

KSC newsletter (2018 Dec.)

【CAL】

Photon calibrator modules installed at the both ends


Calibration pipelines are being constructed


【Mirror】

Many mirrors were cleaned with FC before starting the DRMI commissioning.


X-arm Locking Test

- X-arm test has completed
  - X-arm locked with the axillary (green) laser, then successfully handed off to the IR laser
  - Noise budgeting

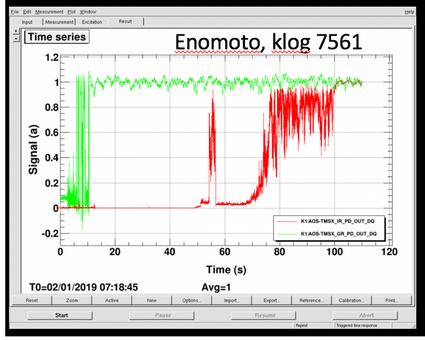




Interferometer Initial Alignment Ongoing

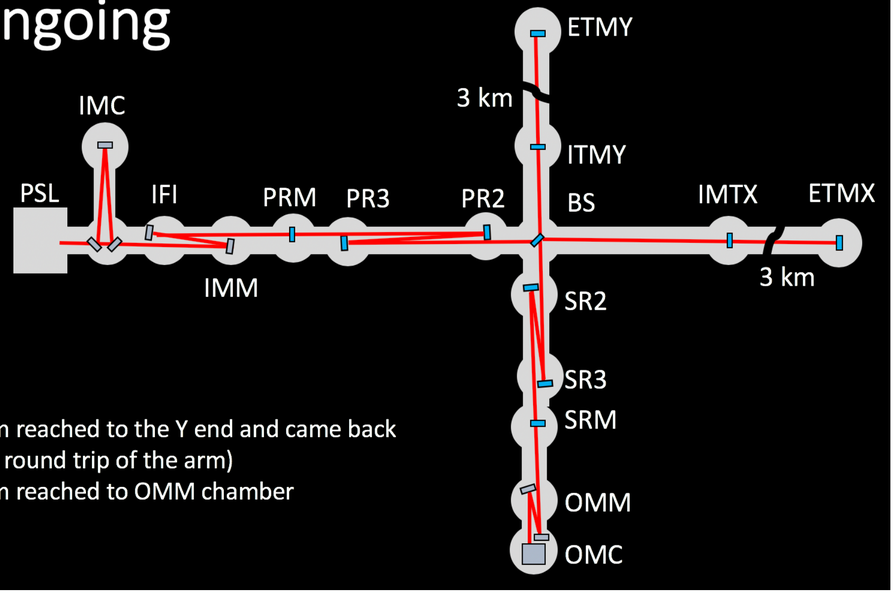

Beam reached to the Y end and came back (one round trip of the arm)
Beam reached to OMM chamber

bKAGRA configuration & installation 2018-2019



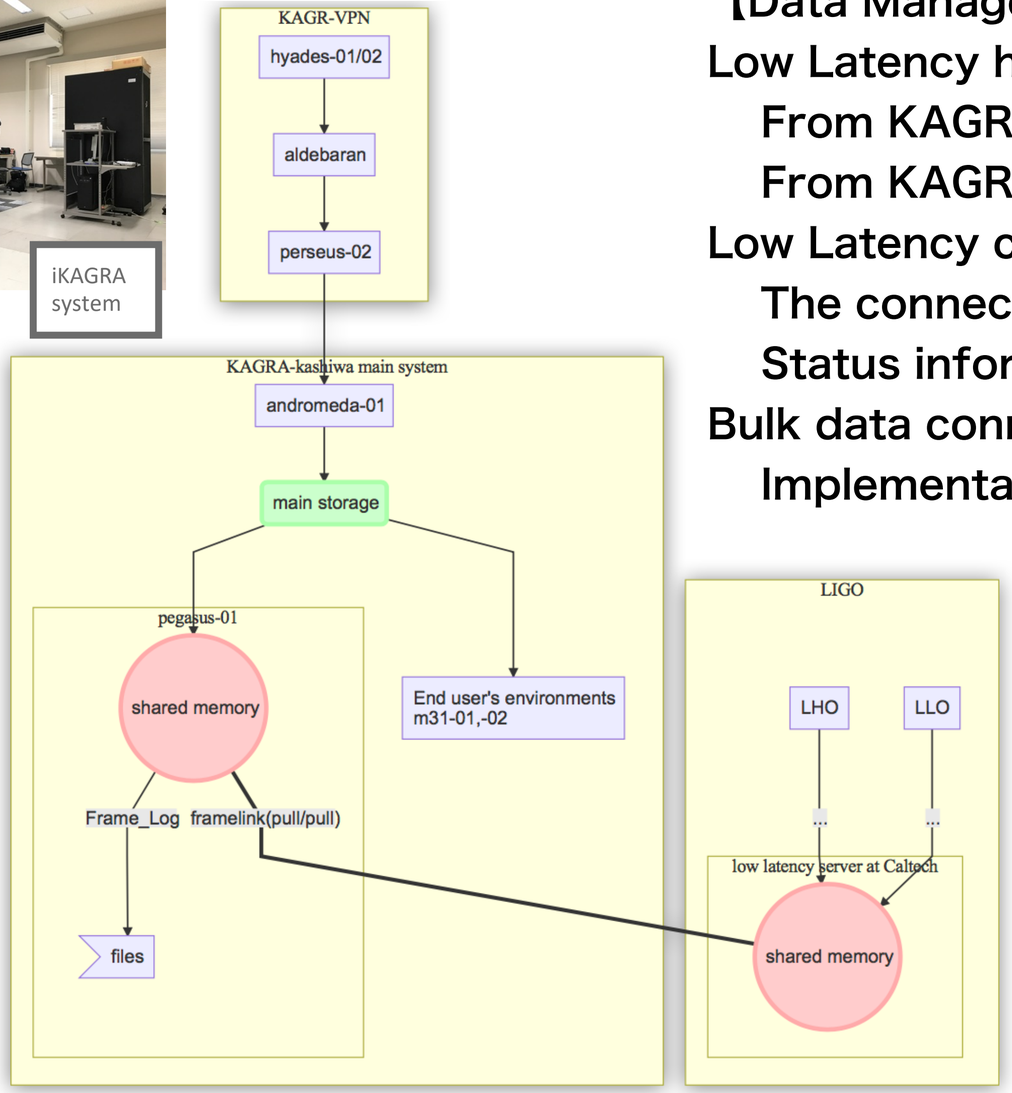

【Data Management】

Low Latency h(t) transfer

- From KAGRA tunnel to the surface test : OK
- From KAGRA tunnel to Kashiwa server : Testing

Low Latency connection with LV

- The connection had established, 6.2 sec from LLO to Kashiwa
- Status information has been exchanged

Bulk data connection with LV


- Implementation of LDR (LIGO Data Replicator) software is on going

◆ KAGRA-LV data exchange will start in April.

(MOU between K-LV 2012, attachment B)

LV data access account is issued only whom filed his/her signed "**O3 commitment form**" and applied for. (declare ethical statement on confidential issues).

Roadmap to join O3: Plan A & B

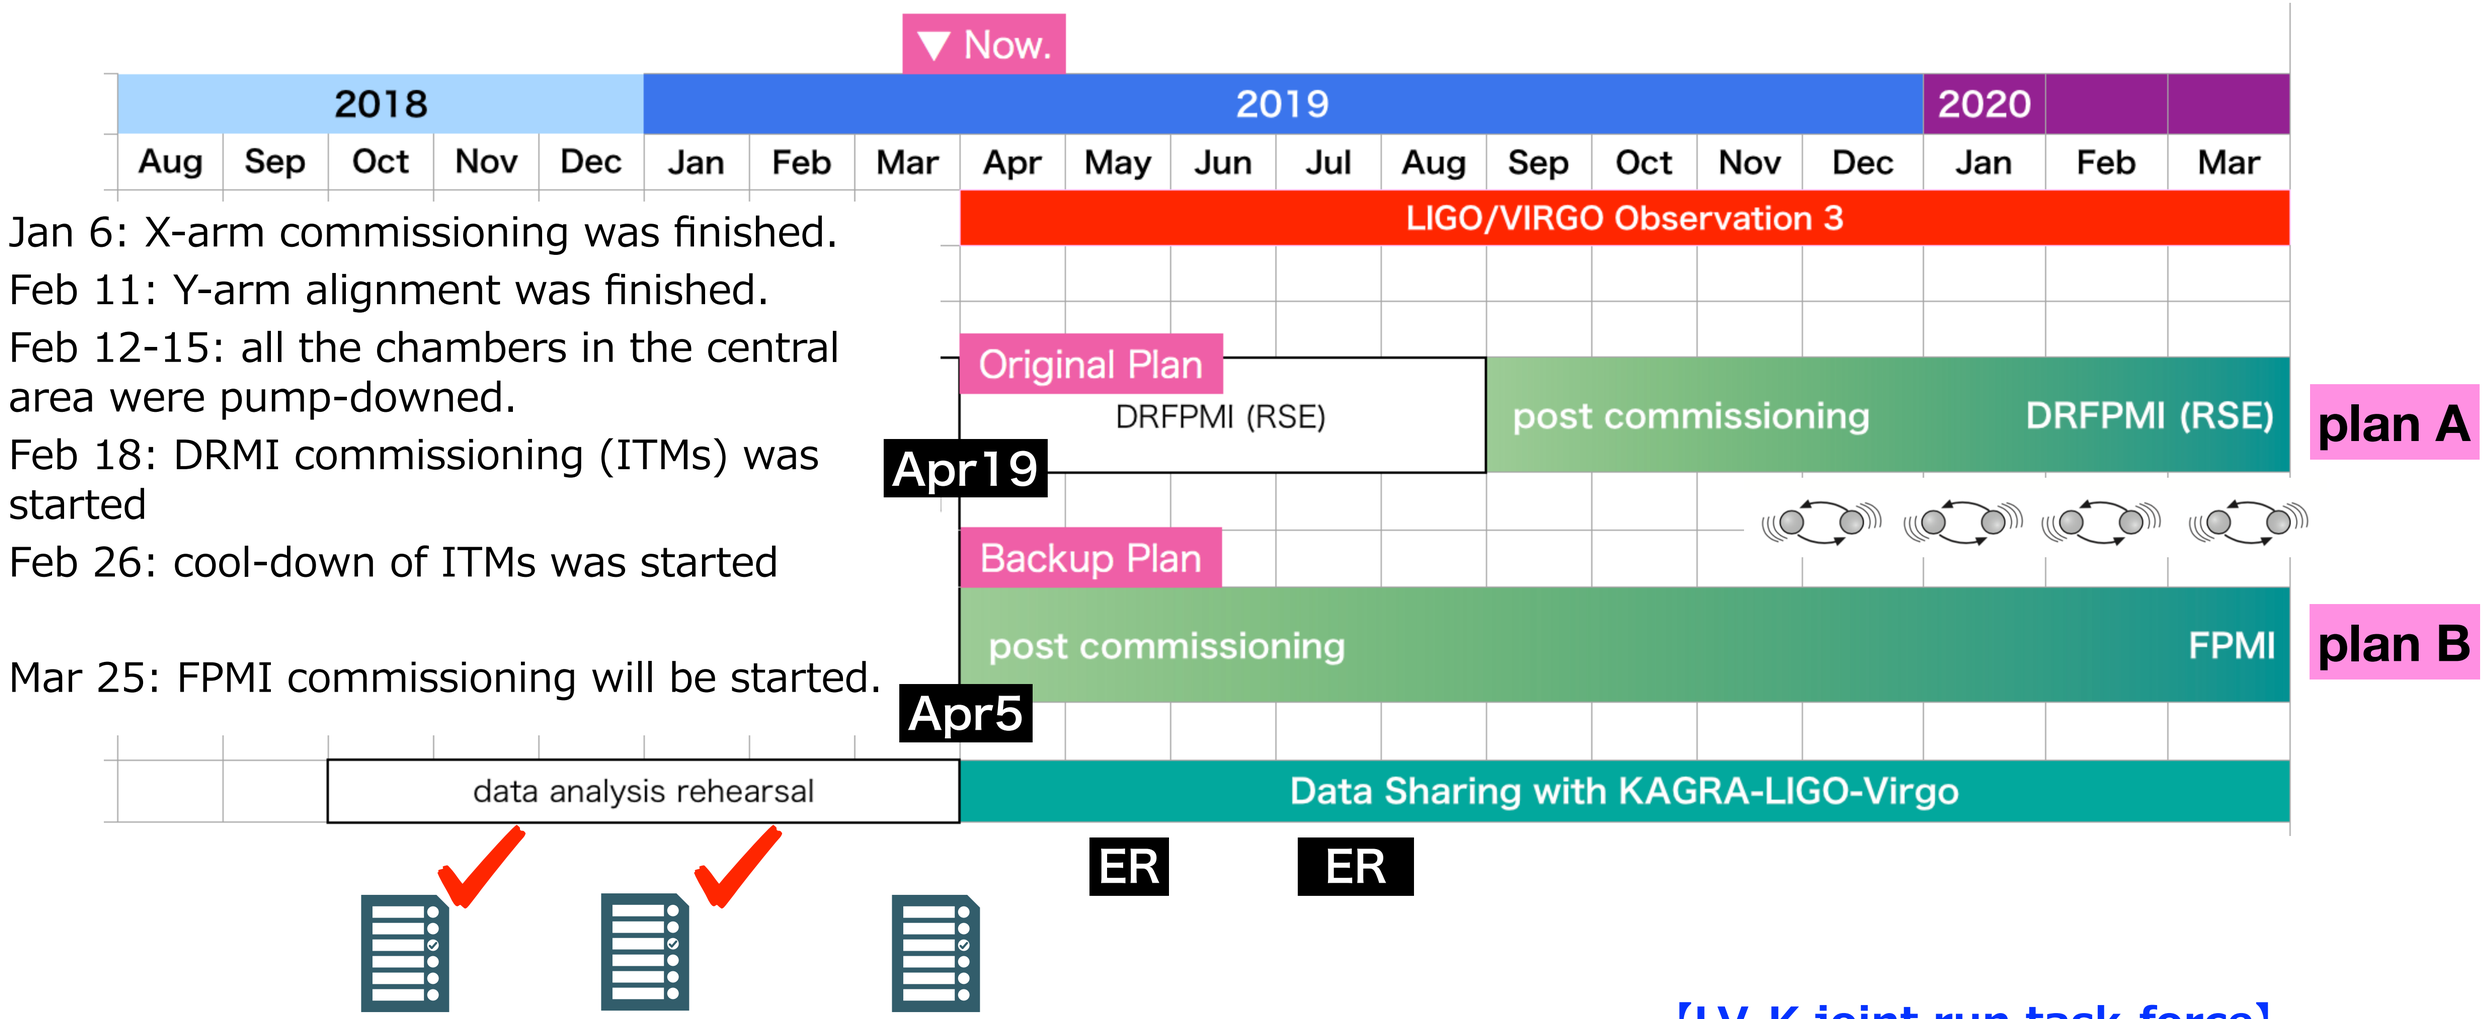

Jan 6: X-arm commissioning was finished.

Feb 11: Y-arm alignment was finished.

Feb 12-15: all the chambers in the central area were pump-downed.

Feb 18: DRMI commissioning (ITMs) was started

Feb 26: cool-down of ITMs was started

Mar 25: FPMI commissioning will be started.

— either DRFPMI(RSE) (-25Mpc, Oct?) or FPMI (-10Mpc, June?)
checking points: Sep/2018, Dec/2018 and Mar/2019

【LV-K joint run task-force】
will prepare white paper in June

Links to Physics and Astronomy people (in Japan)



Takahiro Tanaka

KAGRA collaboration



Michitoshi Yoshida



Grant-in-Aid for Scientific Research on Innovative Areas

Japanese Collaboration for GW Electro-Magnetic Follow-up

GW physics and astronomy: Genesis


A01 Testing GR
A02 Gravity theories
A03 Study on binary BH formation
B01 GWs from NS-NS/BH-NS, Pulsars and Magnetars
B02 Sources probed with High Energy Observations
B03 Nucleosynthesis with follow-up observations
C01 Physics of Core-Collapse SN
C02 SN explosions via their neutrino emissions


J-GEM collaboration

1. Katana Telescope 1.5m optical-infrared telescope of Hiroshima Univ. Japan
2. Mini-TAO Telescope 1m optical-infrared telescope of Univ. of Tokyo. & Atacam
3. Kiso Schmidt Telescope 1.05m Schmidt telescope of Univ. of Tokyo. & Kiso, Ja
4. OAO-WFC 0.9m infrared telescope of NAOJ. & Okayama, Japan
5. MITSuME Telescopes 0.5m optical telescopes of NAOJ and TITech. & Okayama
6. IRSF 1.4m infrared telescope of Nagoya Univ. & South Africa
7. Yamaguchi 32m Radio Telescope, Yamaguchi Univ. & Yamaguchi, Japan
8. Kyoto 3.8m Telescope, 3.8m optical-infrared telescope of Kyoto Univ. & Okaya
9. Hinotori Telescope 0.5m optical telescope of Hiroshima Univ. & Tibet, China.
10. MOA-II 1.8m optical telescope of MOA collaboration. & New Zealand
11. Subaru Telescope 8.2m optical infrared telescope of NAOJ & Hawaii, USA.

Status of KAGRA

- **Underground** and **Cryogenic** interferometric gravitational-wave detector at Kamioka, Japan
- KAGRA will finish installation by the end of March, 2019. (at most 2-week delay).
  Facilities are the originally designed one, and will be the same for O4.

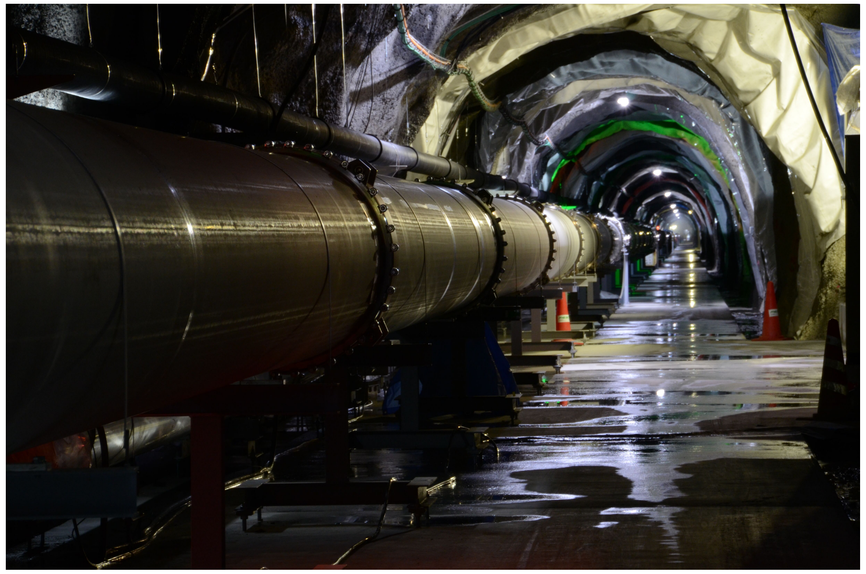

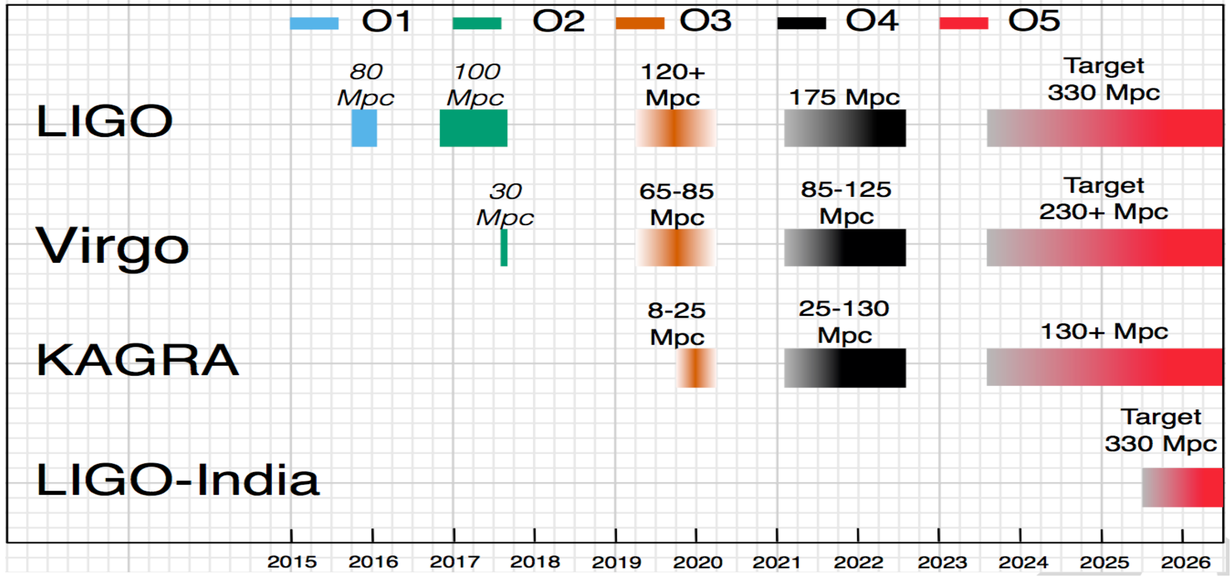

- **KAGRA plans to join LV Observation Run 3 from fall 2019.**
- KAGRA-LV data exchange will start in April.
- KAGRA plans to join O4 from the beginning.