

Summary of Alignment Scheme of KAGRA in O3GK (~2020)

Masayuki Nakano

Yuta Michimura


Scope

- Summarize the alignment scheme used for O3GK and RSE trial in 2020
- To discuss if there are better schemes for O4 and beyond
- Here, we only discuss daily alignment (semi-auto alignment; SAL) for locking and ASC after locking
- We do not discuss the initial alignment
for initial alignment, see, for example [JGW-T1604823](#) (iKAGRA), [JGW-T1605692](#) (bKAGRA Phase 1), [JGW-G1808462](#) (X&Y arm)
- References
[JGW-G2011544](#): KAGRA beam alignment manual for beginners in O3
[JGW-G2011687](#): ASC Status and To-Dos
[JGW-T2112593](#): Cable diagram (PSL, IOO, IOO1, ALS0, ALS1, LSC0, ASC0)


Acronyms

- **SAL (Semi-Auto Alignment)**
Guardian based daily alignment where you can click buttons step by step. Manual checkings in-between the steps are necessary.
- **ADS (Alignment Dither System)**
Dither optics and see the fluctuations in the transmitted power to control the alignment of the optics to maximize the transmitted power.
- **BPC (Beam Pointing Control)**
Dither optics and see angle-to-length to control the alignment of the optics to control the beam spot positions on the optics.
- **WFS (Wave Front Sensor)**
Modulation-demodulation scheme to control the alignment of the optics using RF QPDs.
- **IP (Input Pointing)**
Two steering mirrors at the output of PSL (pre-stabilized laser) table for input pointing to IMC (input-mode cleaner).


Layout

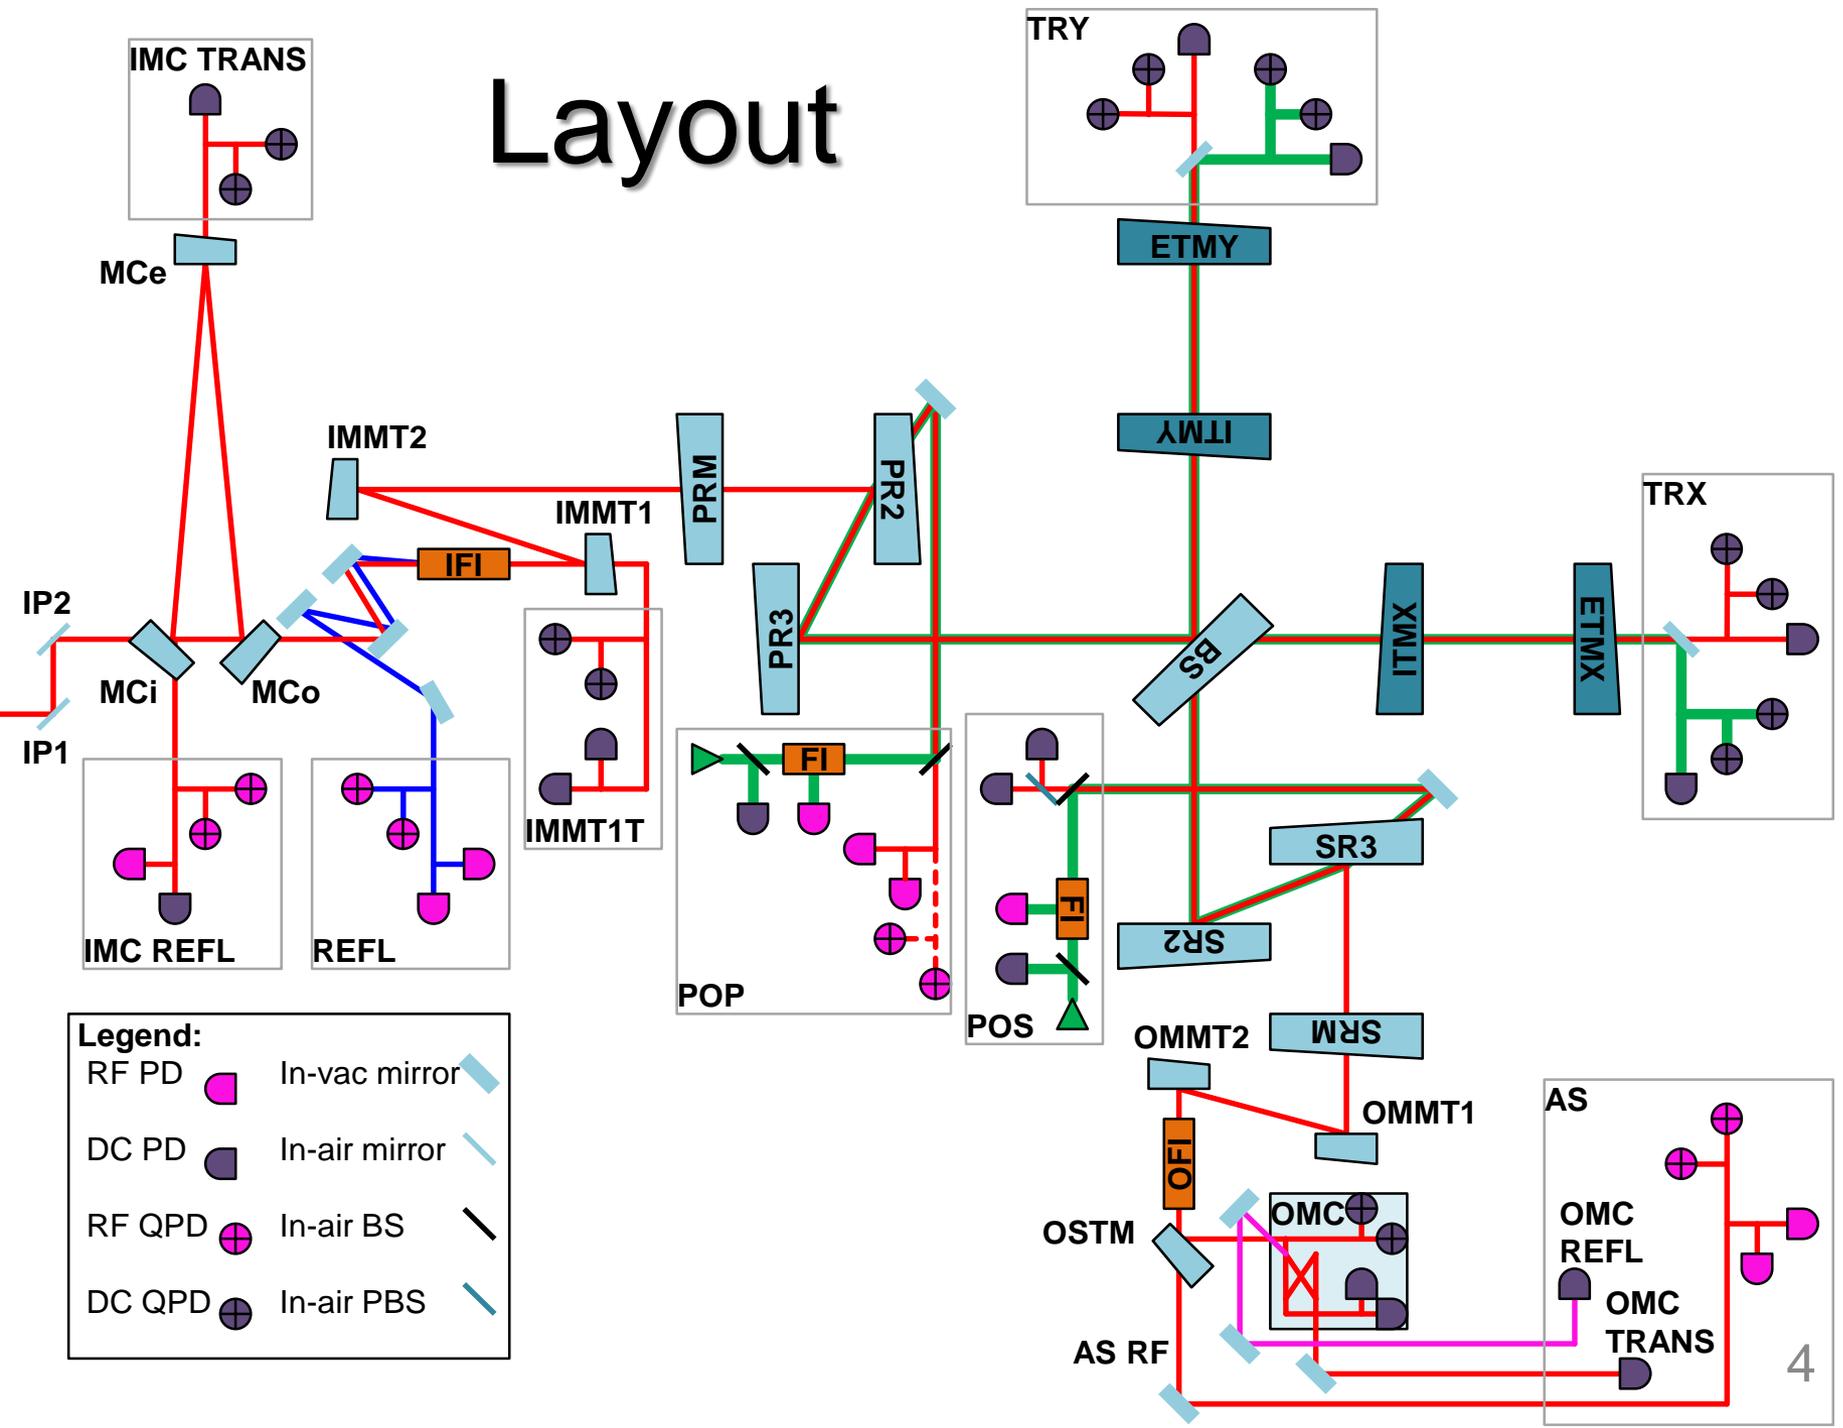

IMC: WFS & QPD loops

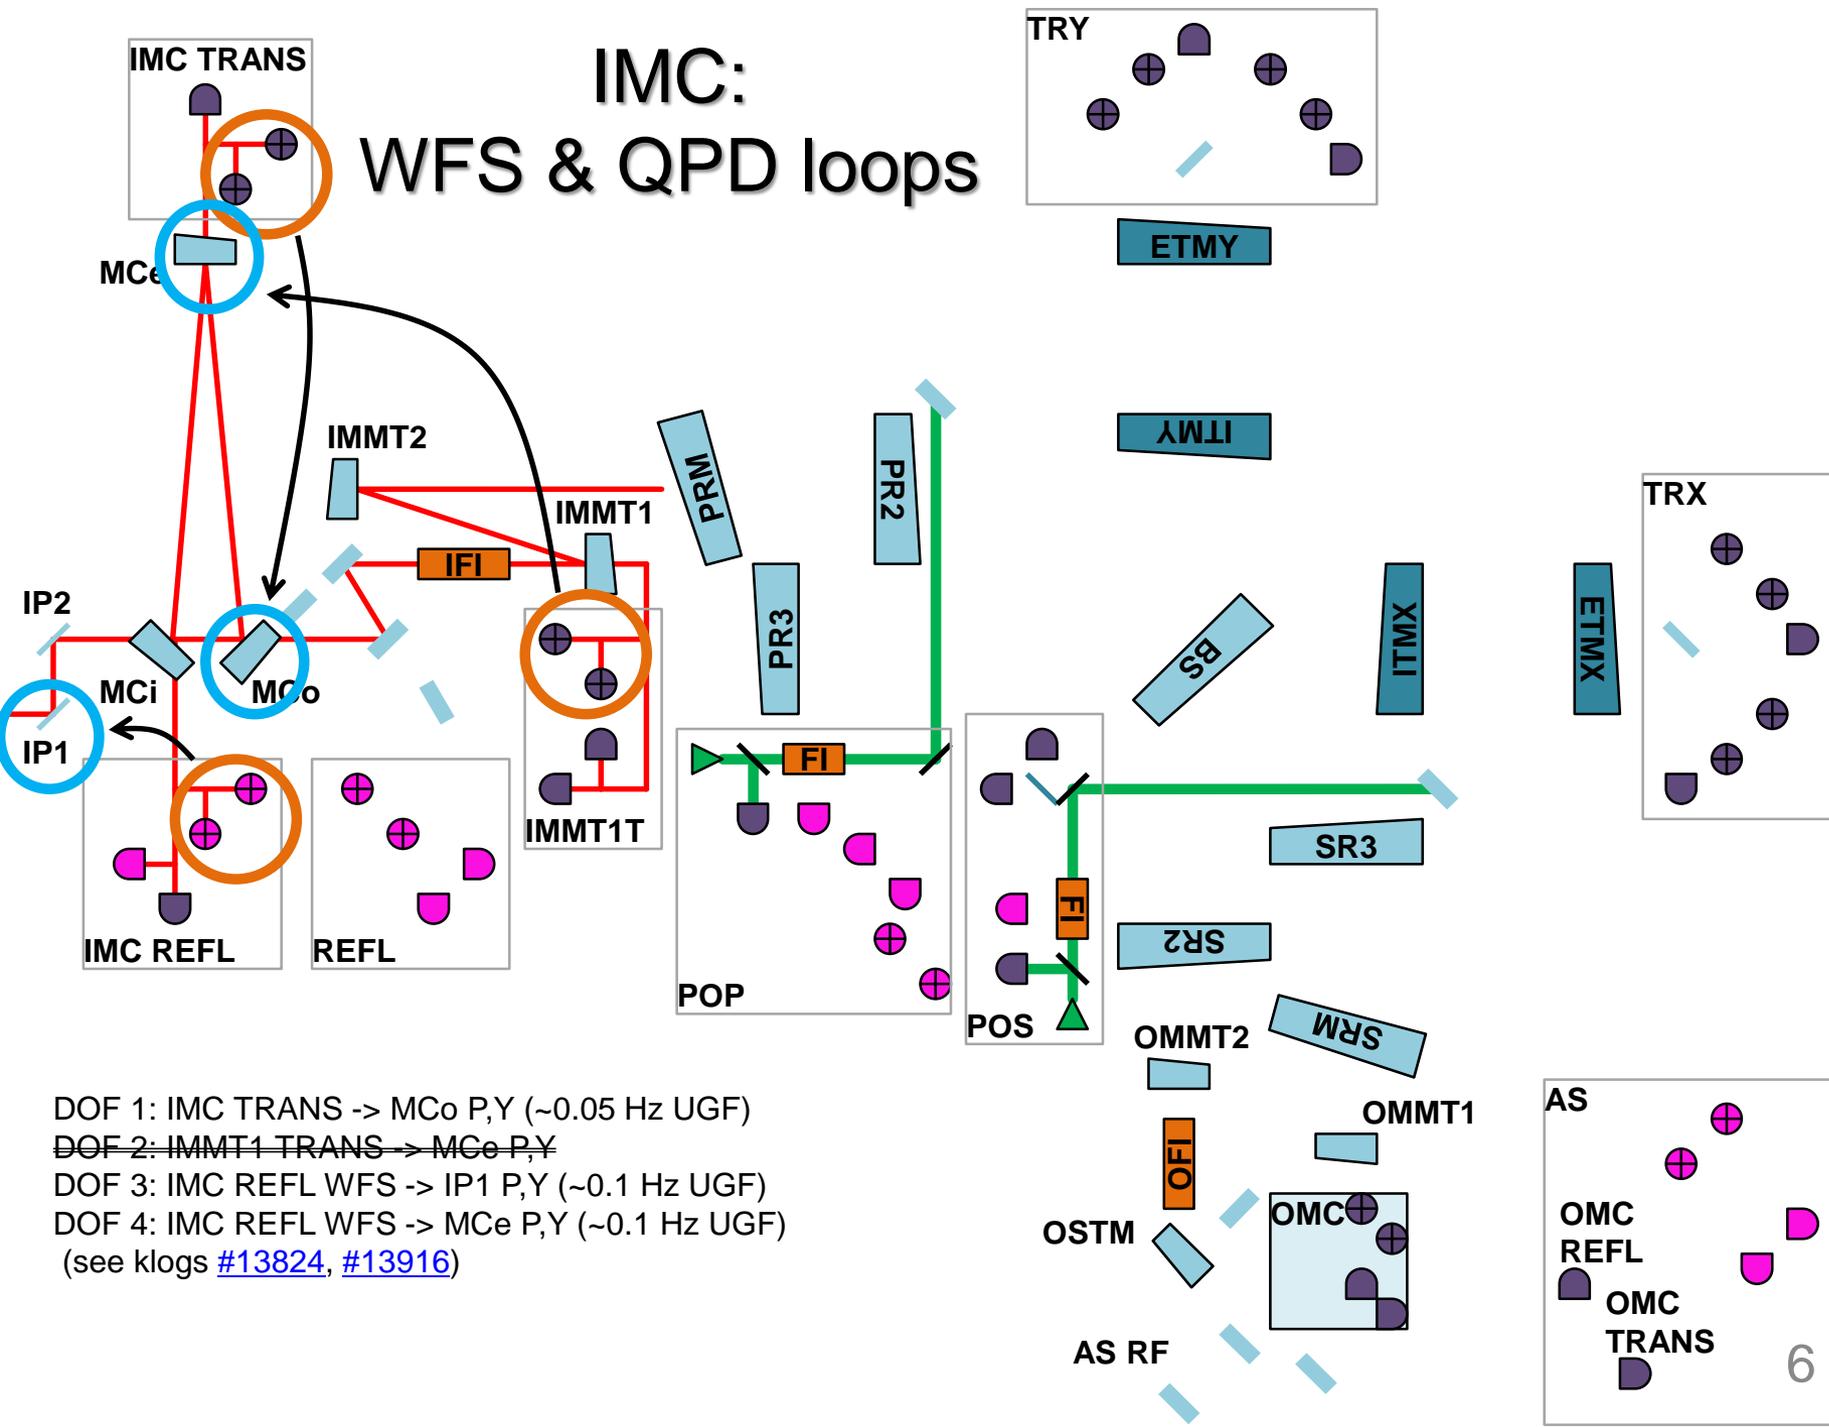

Xarm: IR alignment

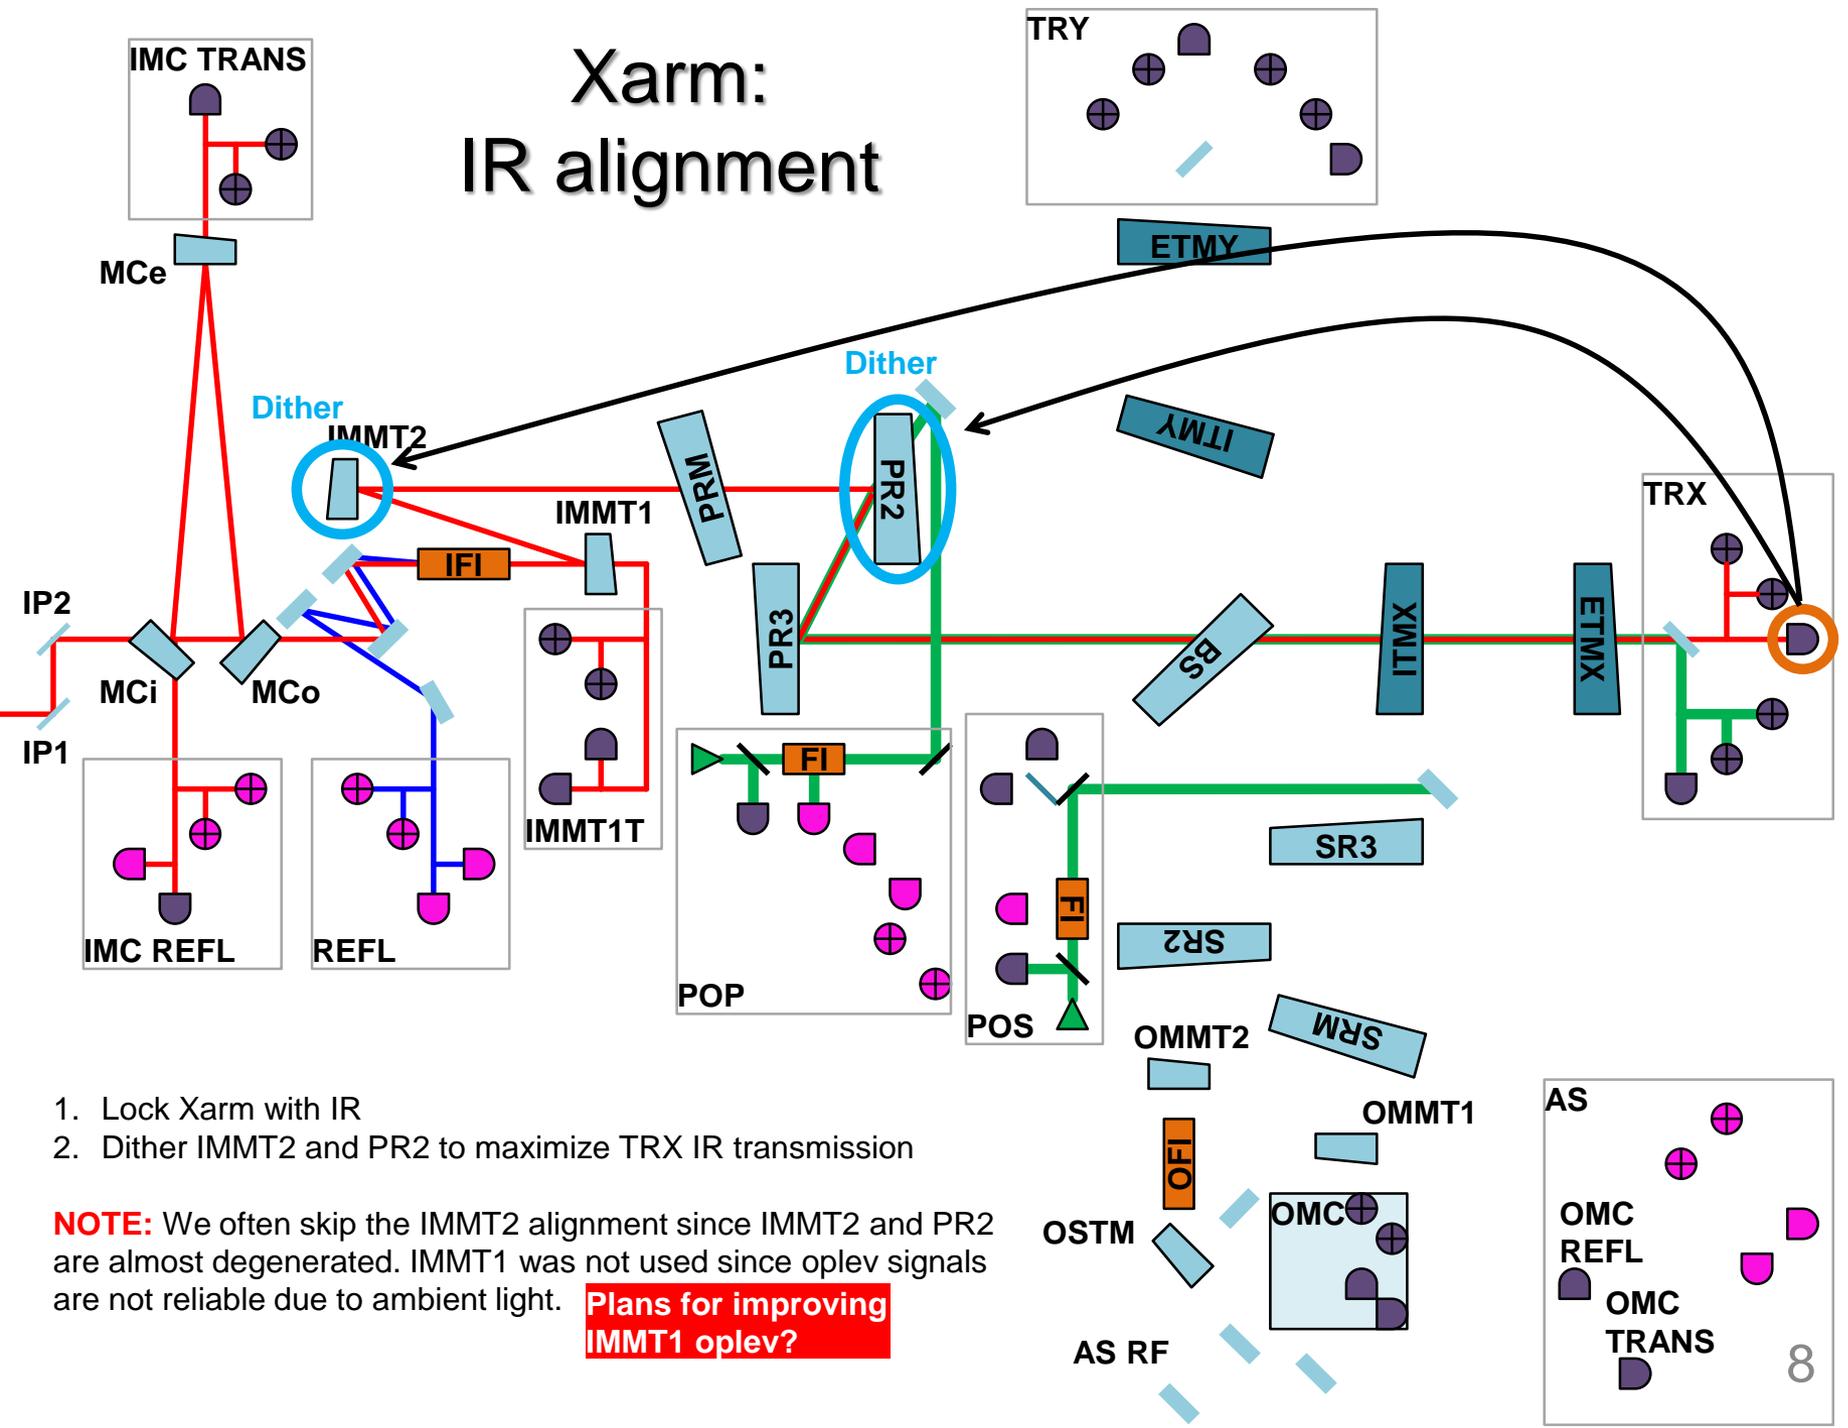


1. Lock Xarm with IR
2. Dither IMMT2 and PR2 to maximize TRX IR transmission

NOTE: We often skip the IMMT2 alignment since IMMT2 and PR2 are almost degenerated. IMMT1 was not used since oplev signals are not reliable due to ambient light.

Plans for improving IMMT1 oplev?

PRMI: IR alignment

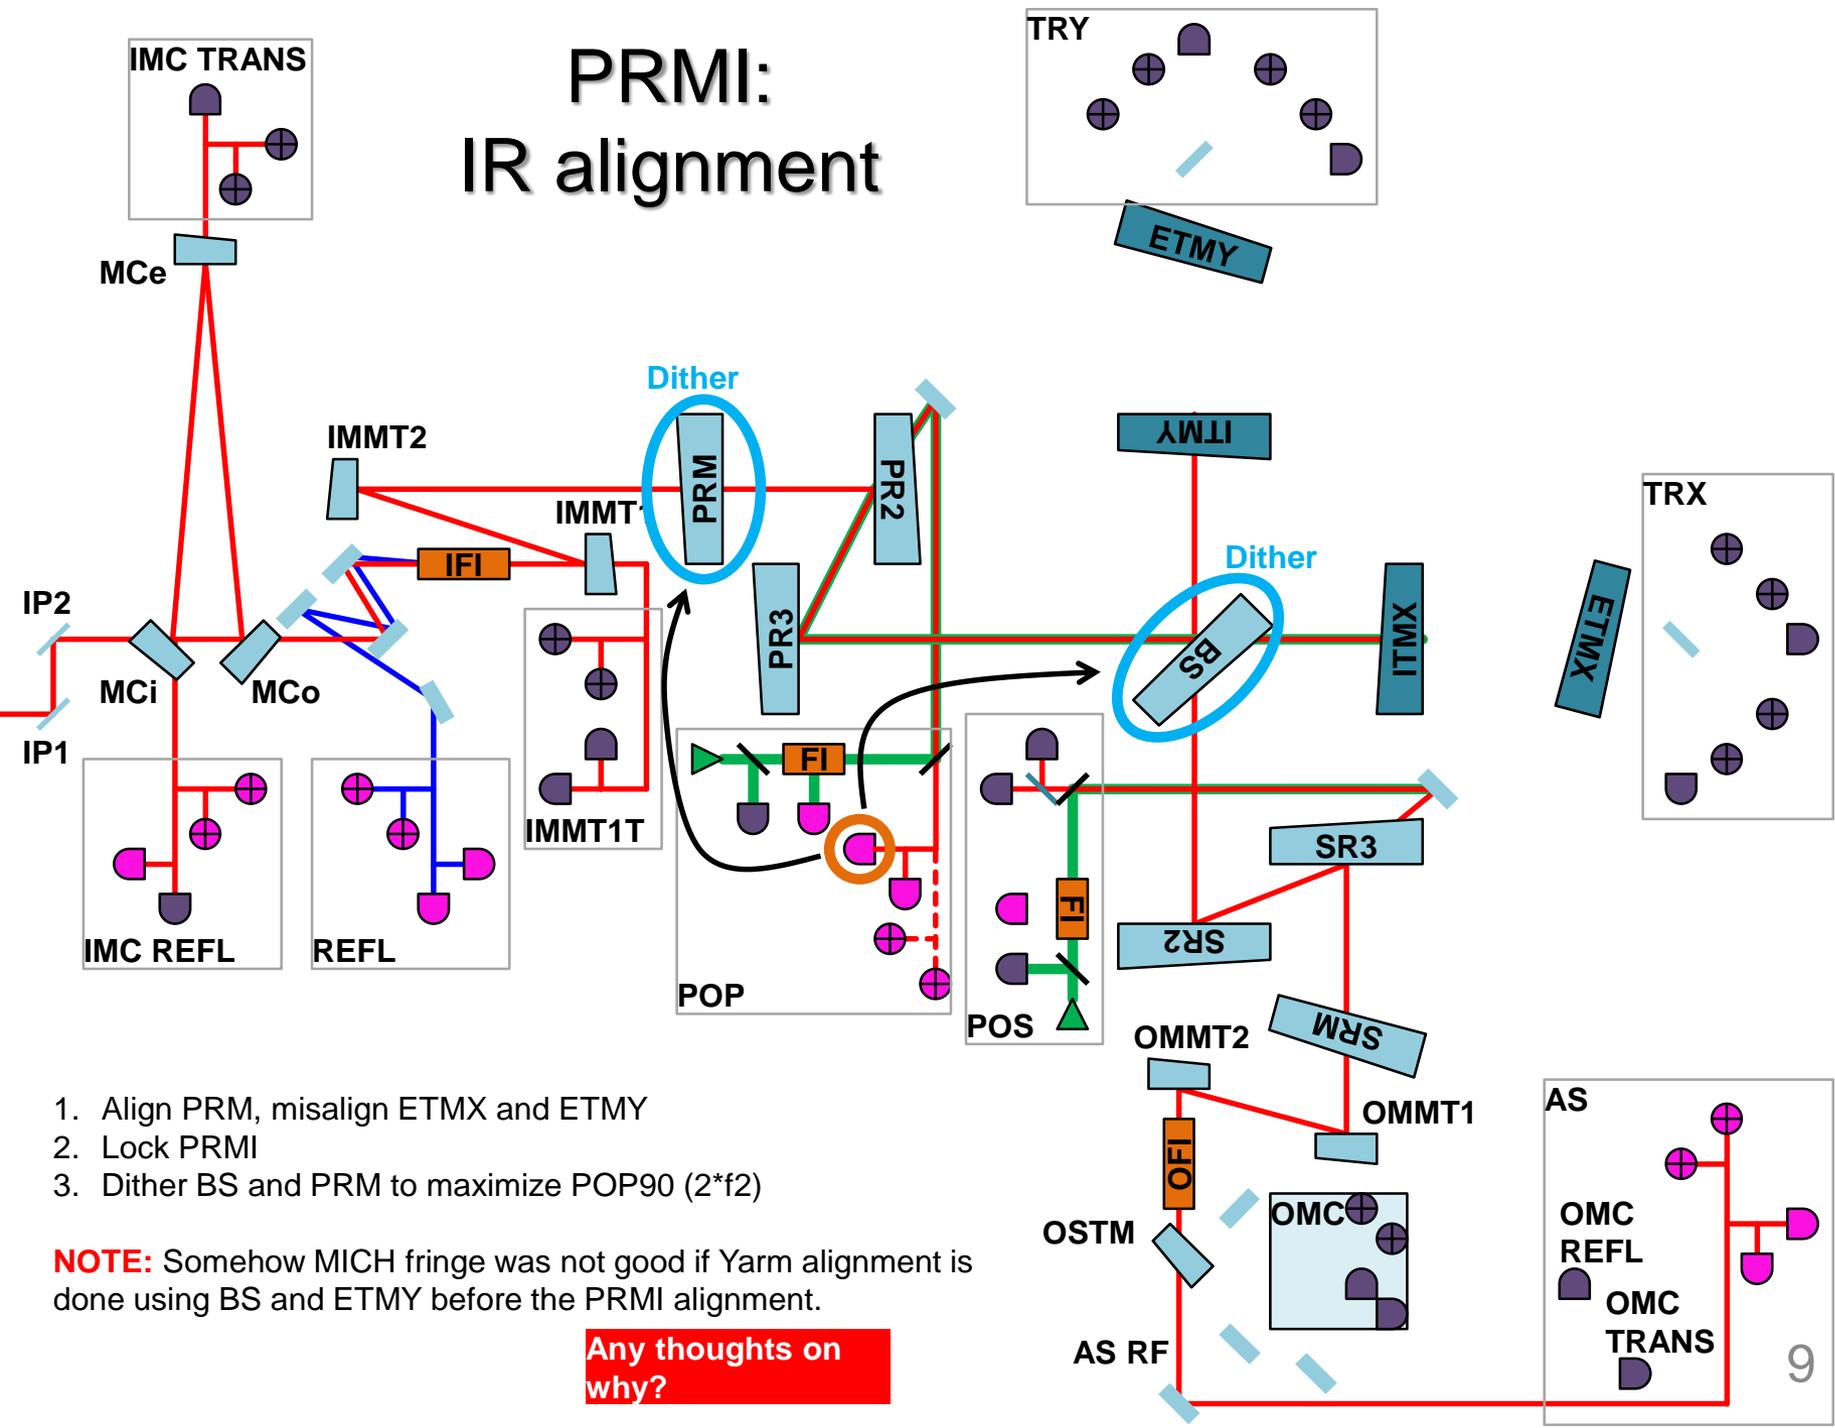


1. Align PRM, misalign ETMX and ETMY
2. Lock PRMI
3. Dither BS and PRM to maximize POP90 ($2 \times f_2$)

NOTE: Somehow MICH fringe was not good if Yarm alignment is done using BS and ETMY before the PRMI alignment.


Any thoughts on why?

Yarm: IR alignment

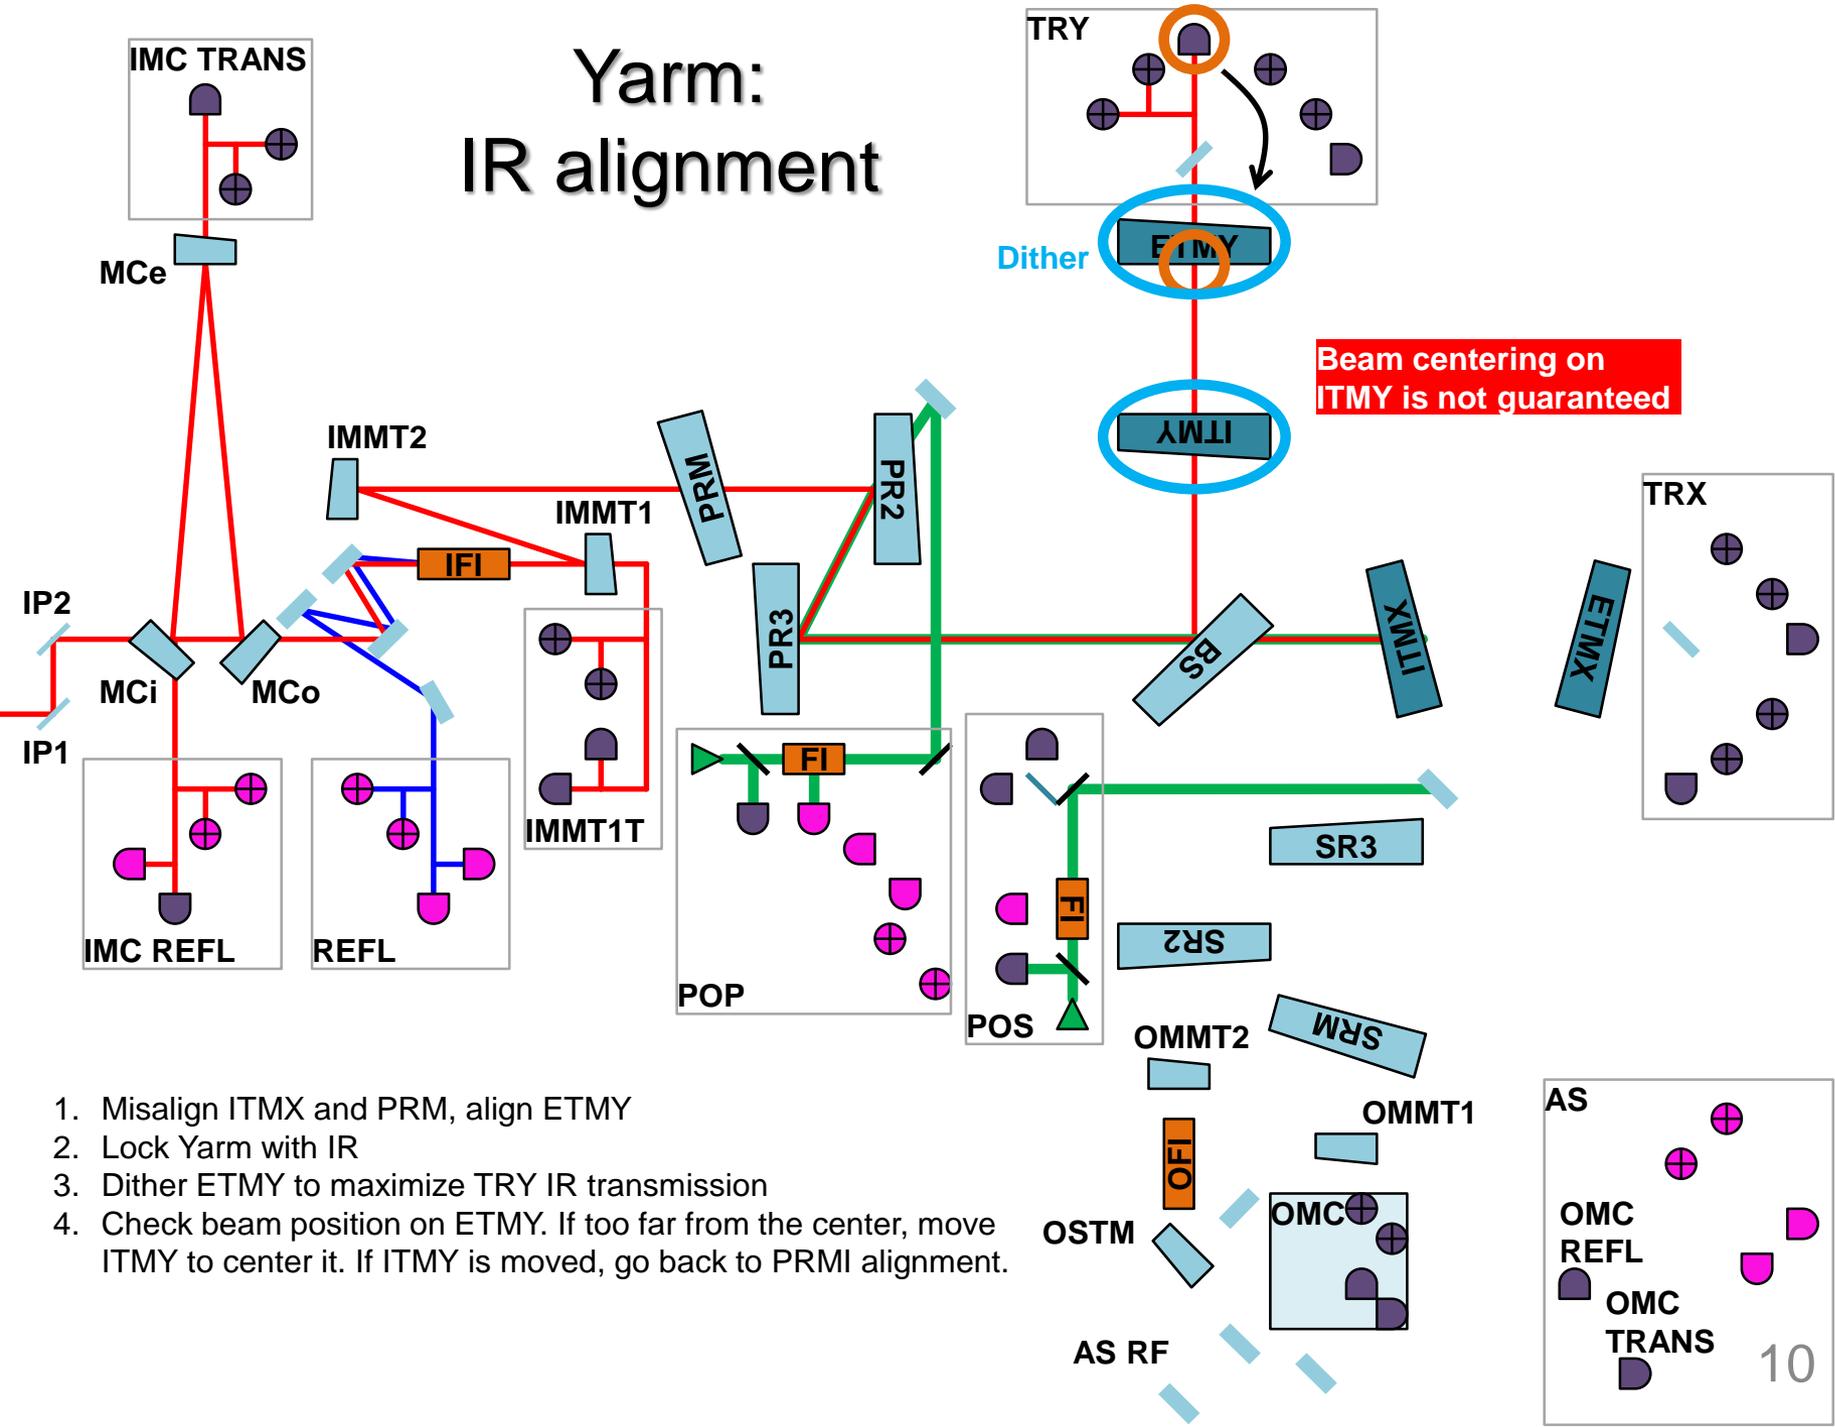


1. Misalign ITMX and PRM, align ETMY
2. Lock Yarm with IR
3. Dither ETMY to maximize TRY IR transmission
4. Check beam position on ETMY. If too far from the center, move ITMY to center it. If ITMY is moved, go back to PRMI alignment.

Yarm: Green alignment

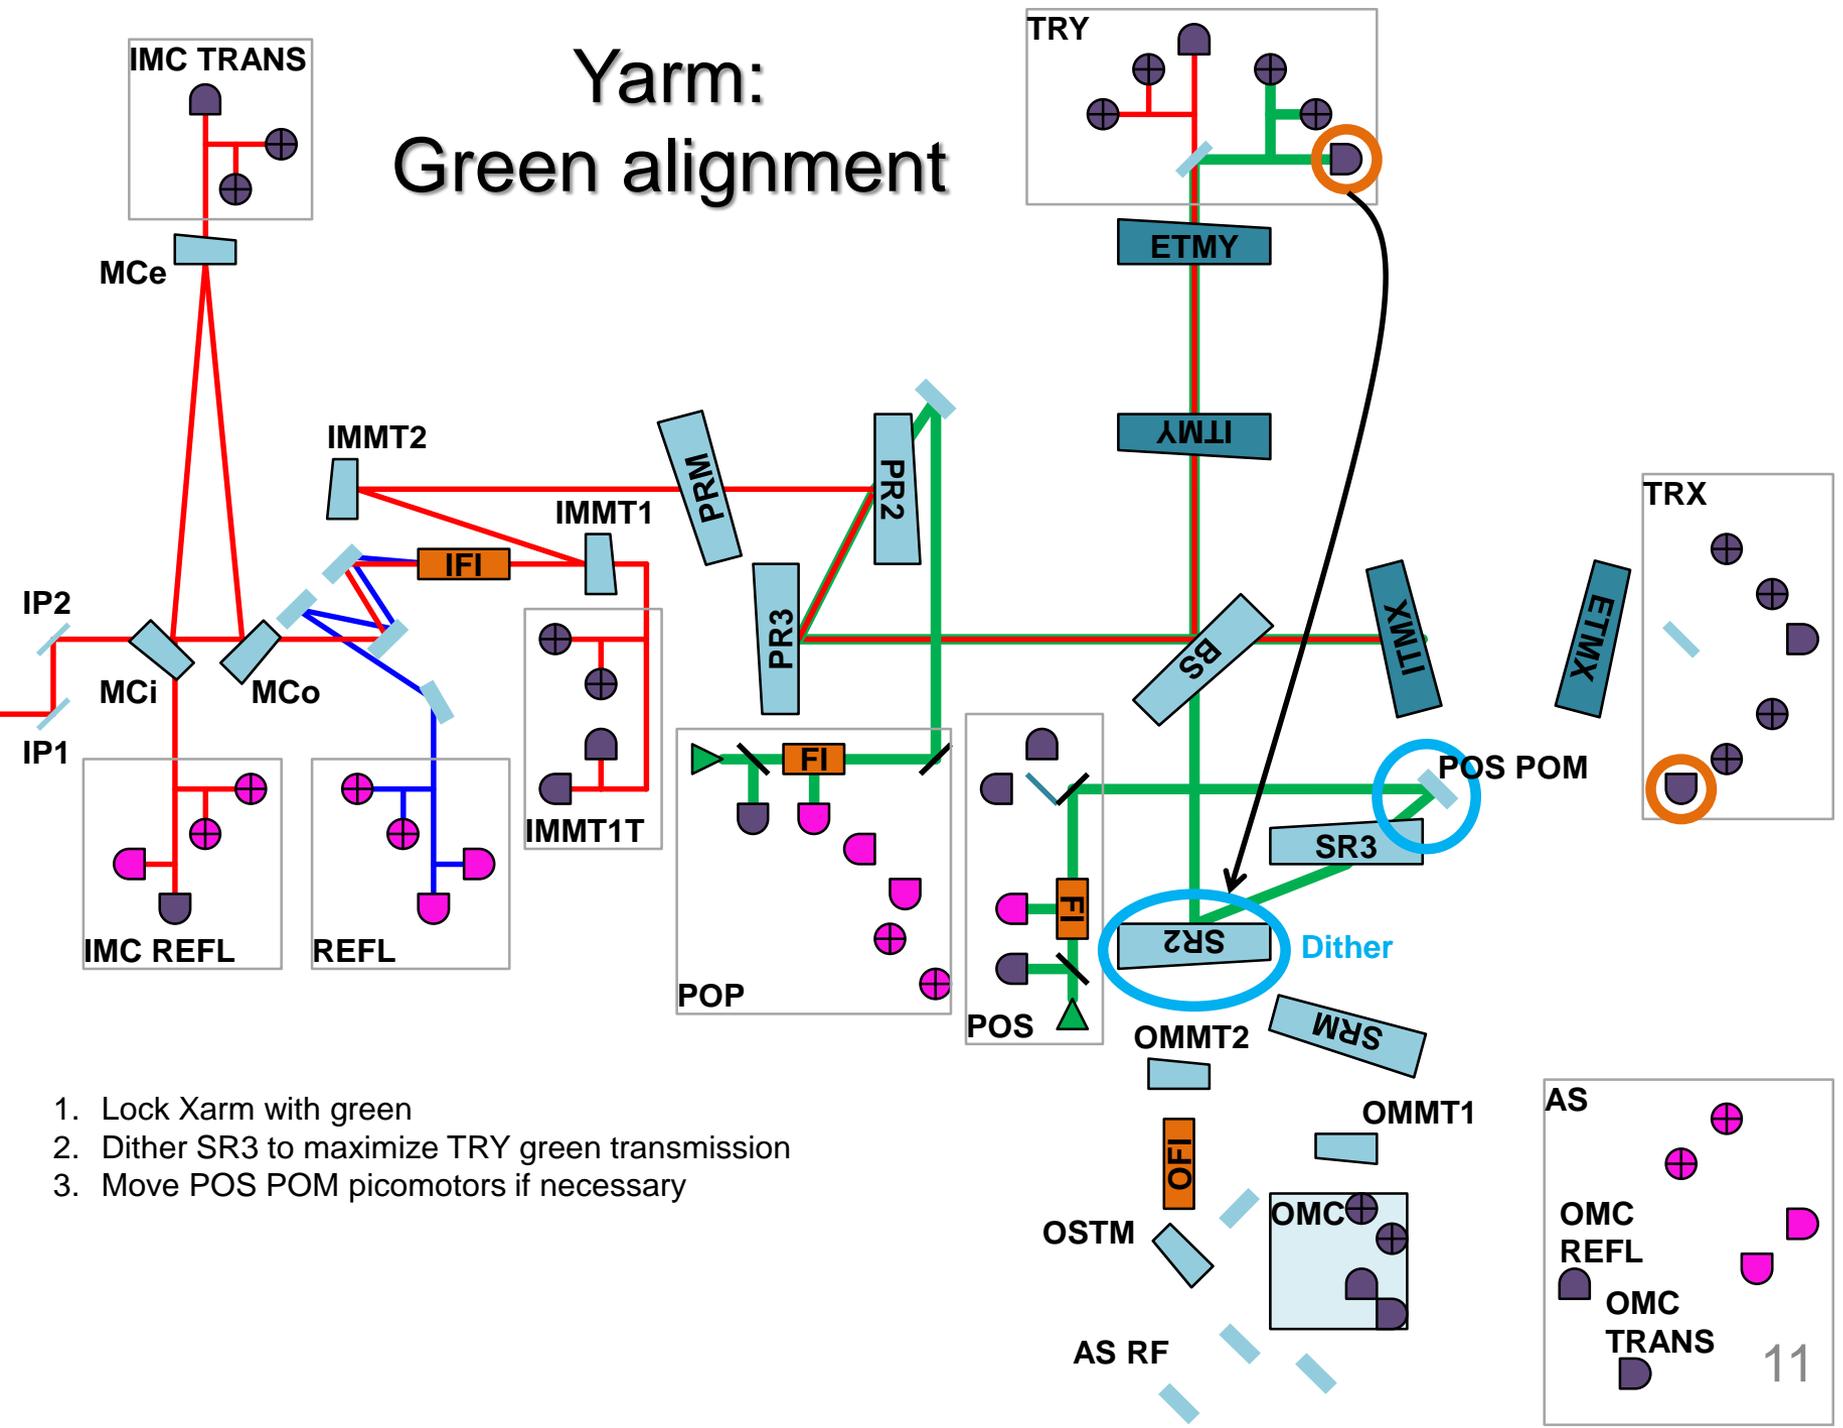


1. Lock Xarm with green
2. Dither SR3 to maximize TRY green transmission
3. Move POS POM picomotors if necessary

OMC: IR alignment

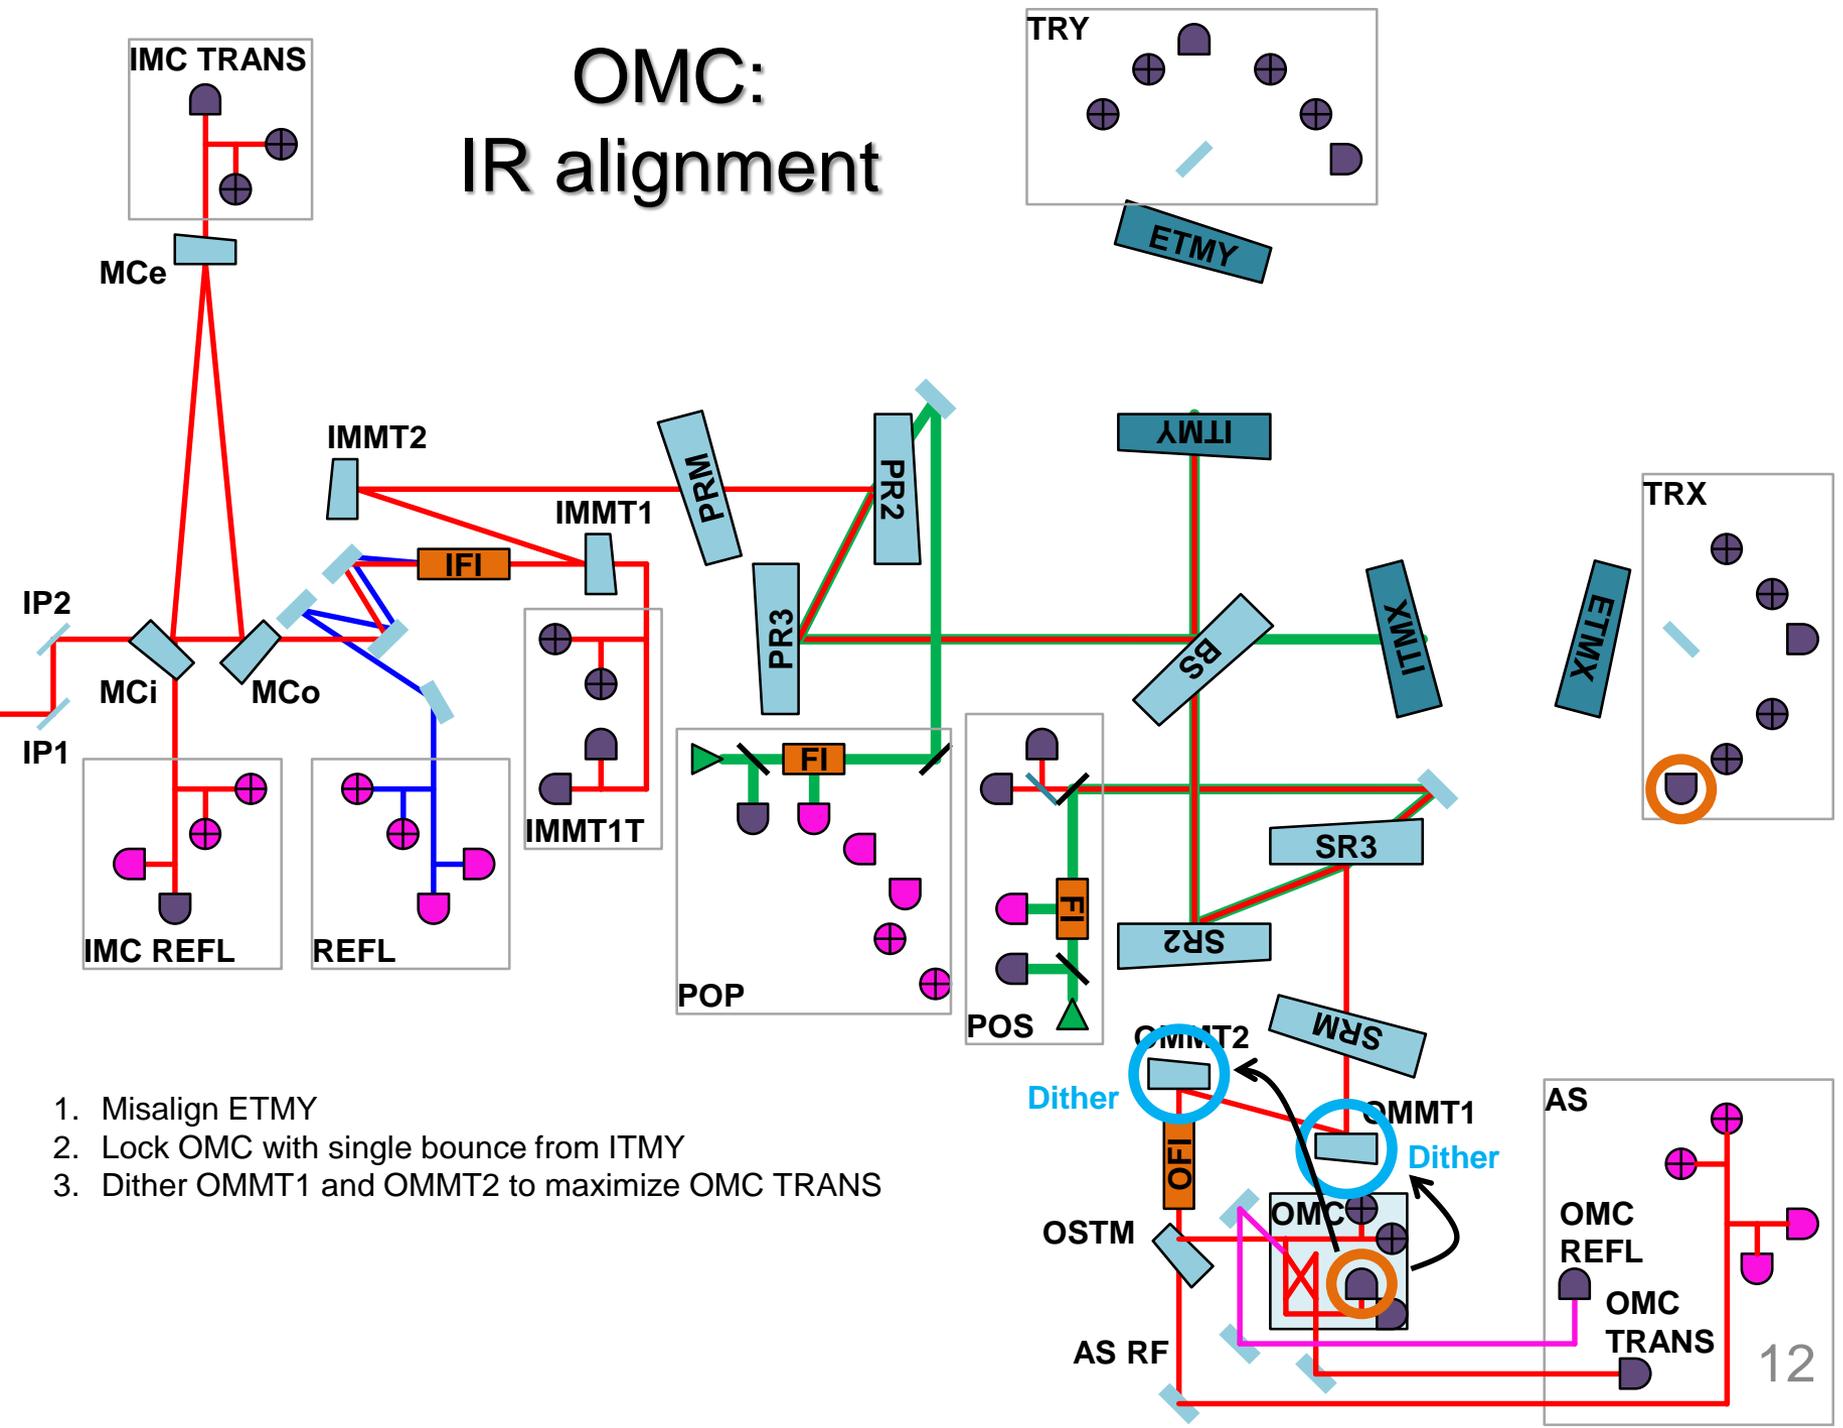

1. Misalign ETMY
2. Lock OMC with single bounce from ITMY
3. Dither OMMT1 and OMMT2 to maximize OMC TRANS

PRFPMI: BPC & ADS loops

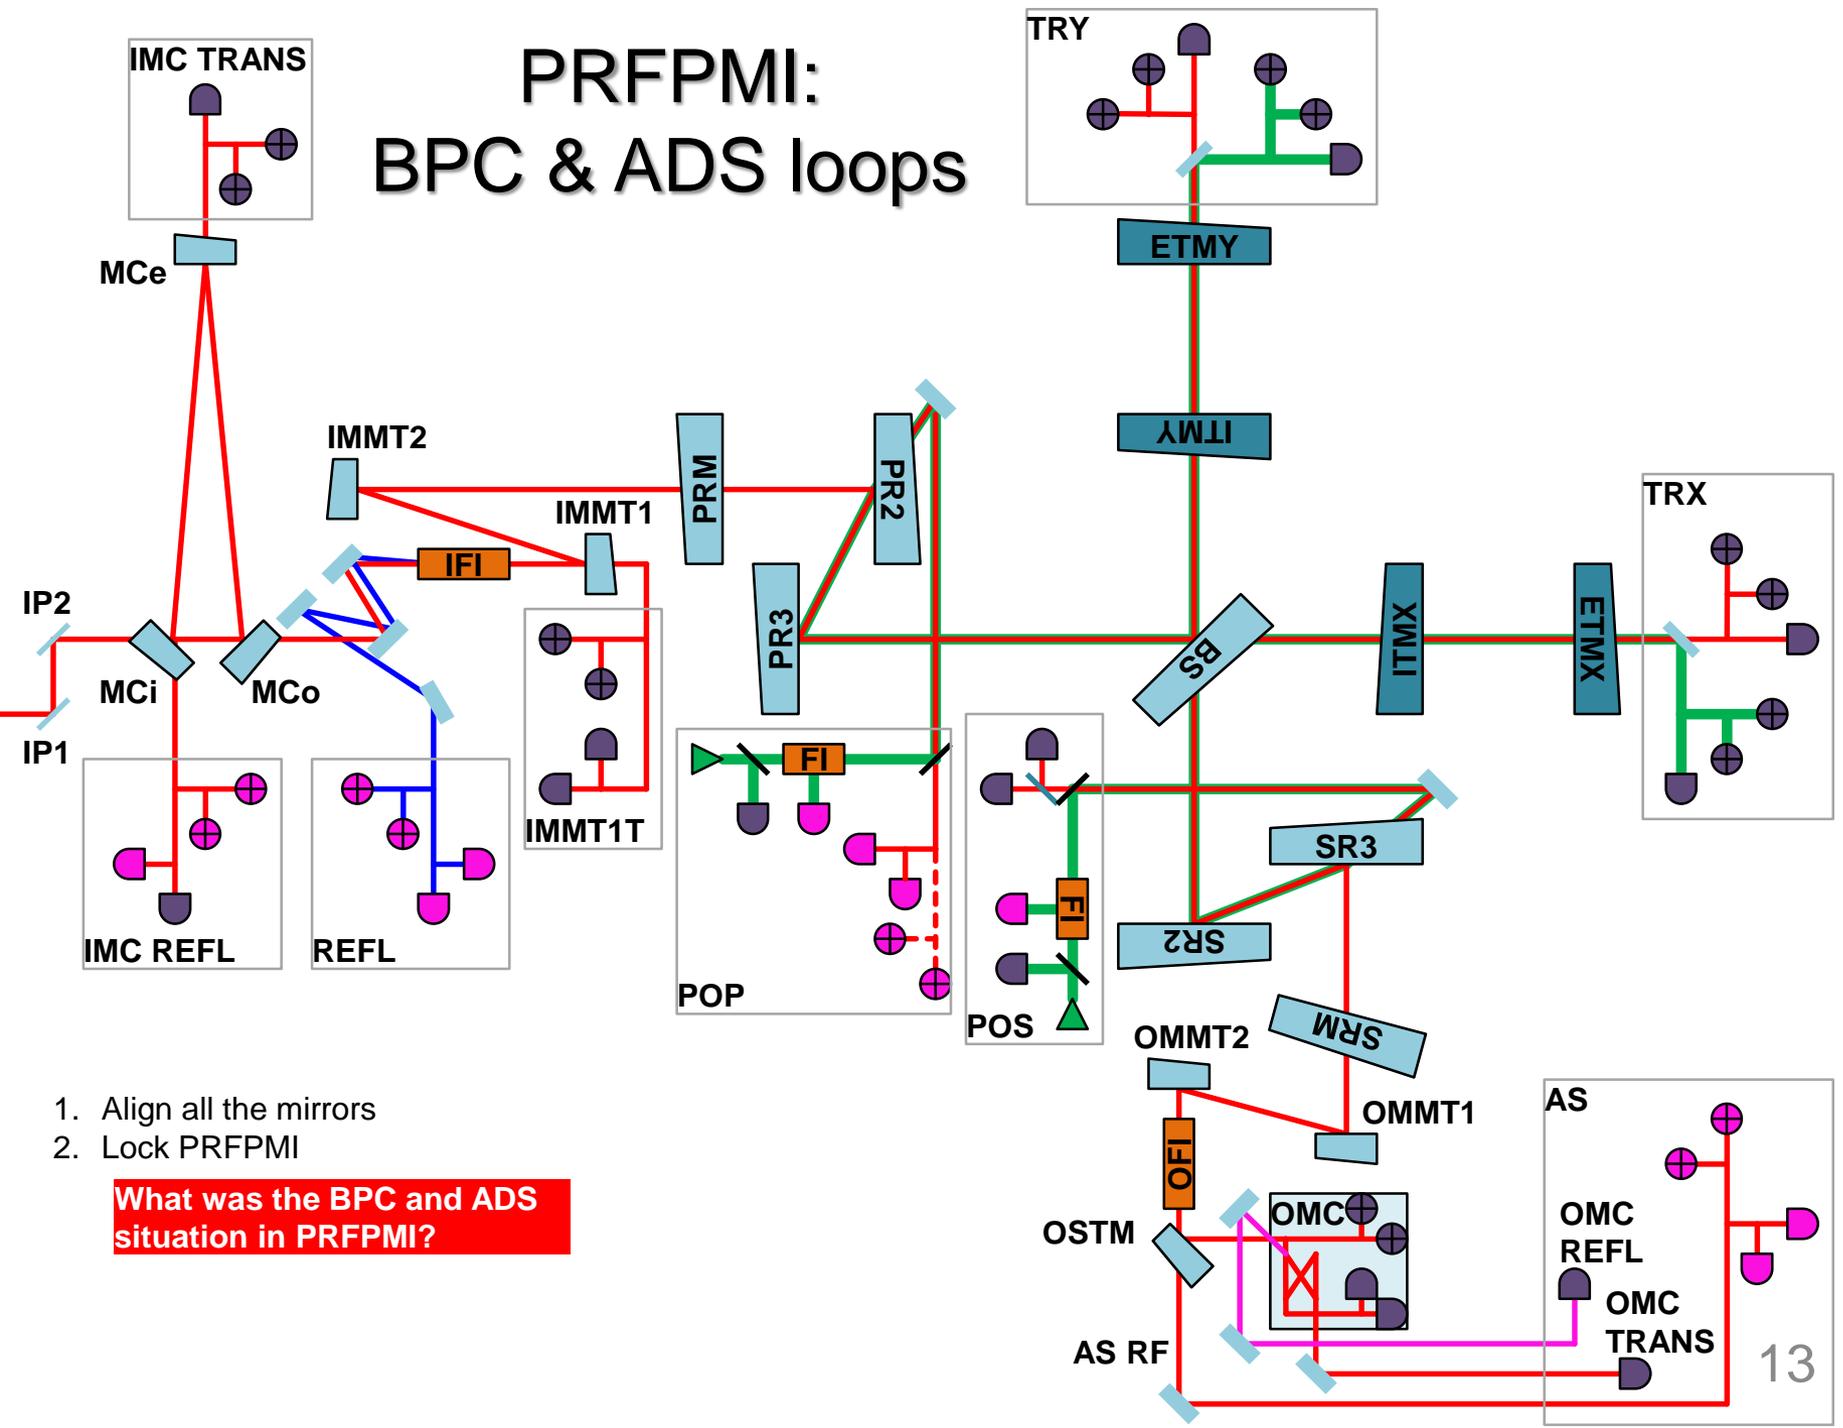

1. Align all the mirrors
2. Lock PRFPMI

What was the BPC and ADS situation in PRFPMI?

PRFPMI: WFS & QPD loops

