

Interferometer Design for bKAGRA Phase 1

Yuta Michimura

Department of Physics, University of Tokyo


for the MIF subgroup

bKAGRA Phase 1

- Goal:
 - Start observation run using 3km cryogenic interferometer by the end of March 2018
 - TM temperature should be (close to) 20 K
 - No requirement for sensitivity
- Configuration:
 - 3 km (power-recycled) Michelson
 - Michelson with LSC is the minimum goal
 - but we prepare for PRMI with ASC
- Purpose:
 - Test cryopayload and cryogenic operation


Configuration

- Every detection port listed here has both PD and QPDs (for ASC), and placed on output optics tables in air
- Green lasers are also installed (but not necessary for Phase 1)
- No requirement for vacuum level

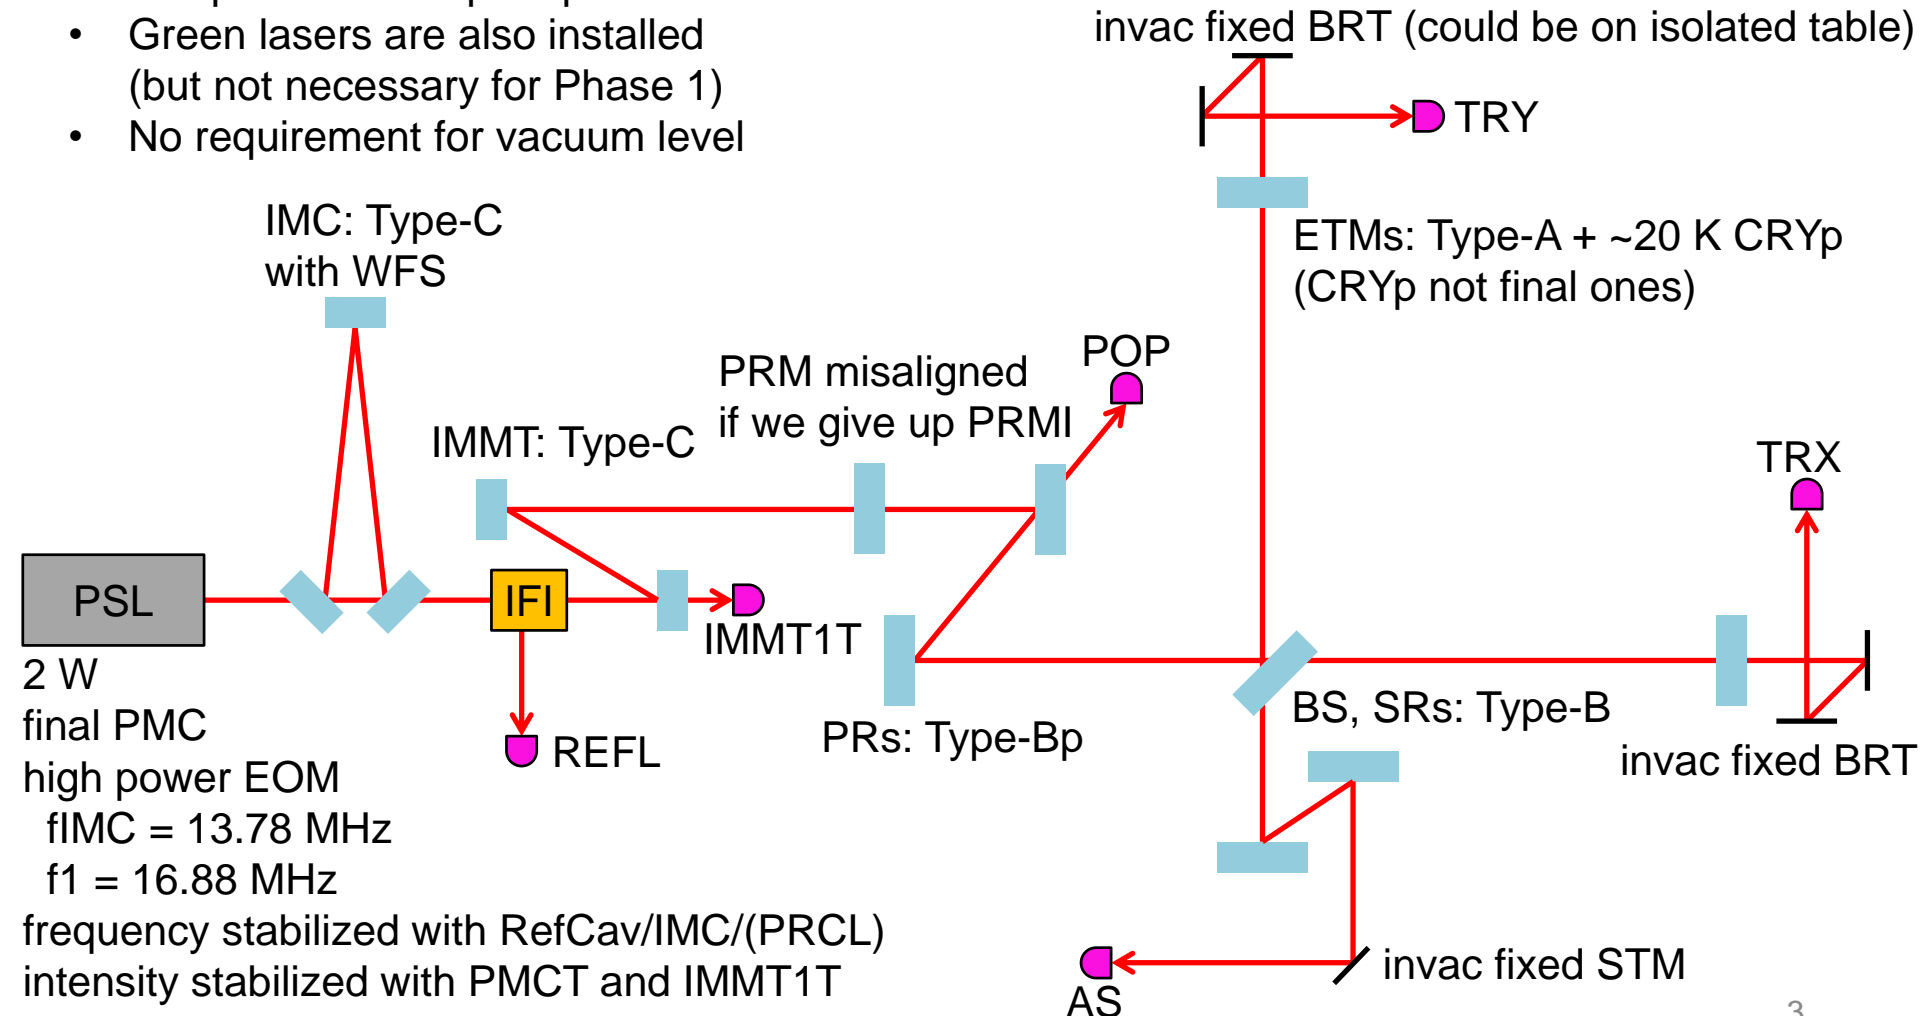

Layout

- Adjust layout slightly to compensate ITM wedge
- Move PR2 and PR3 to stabilize PR cavity
- see [JGW-G1605199](#) for more detail

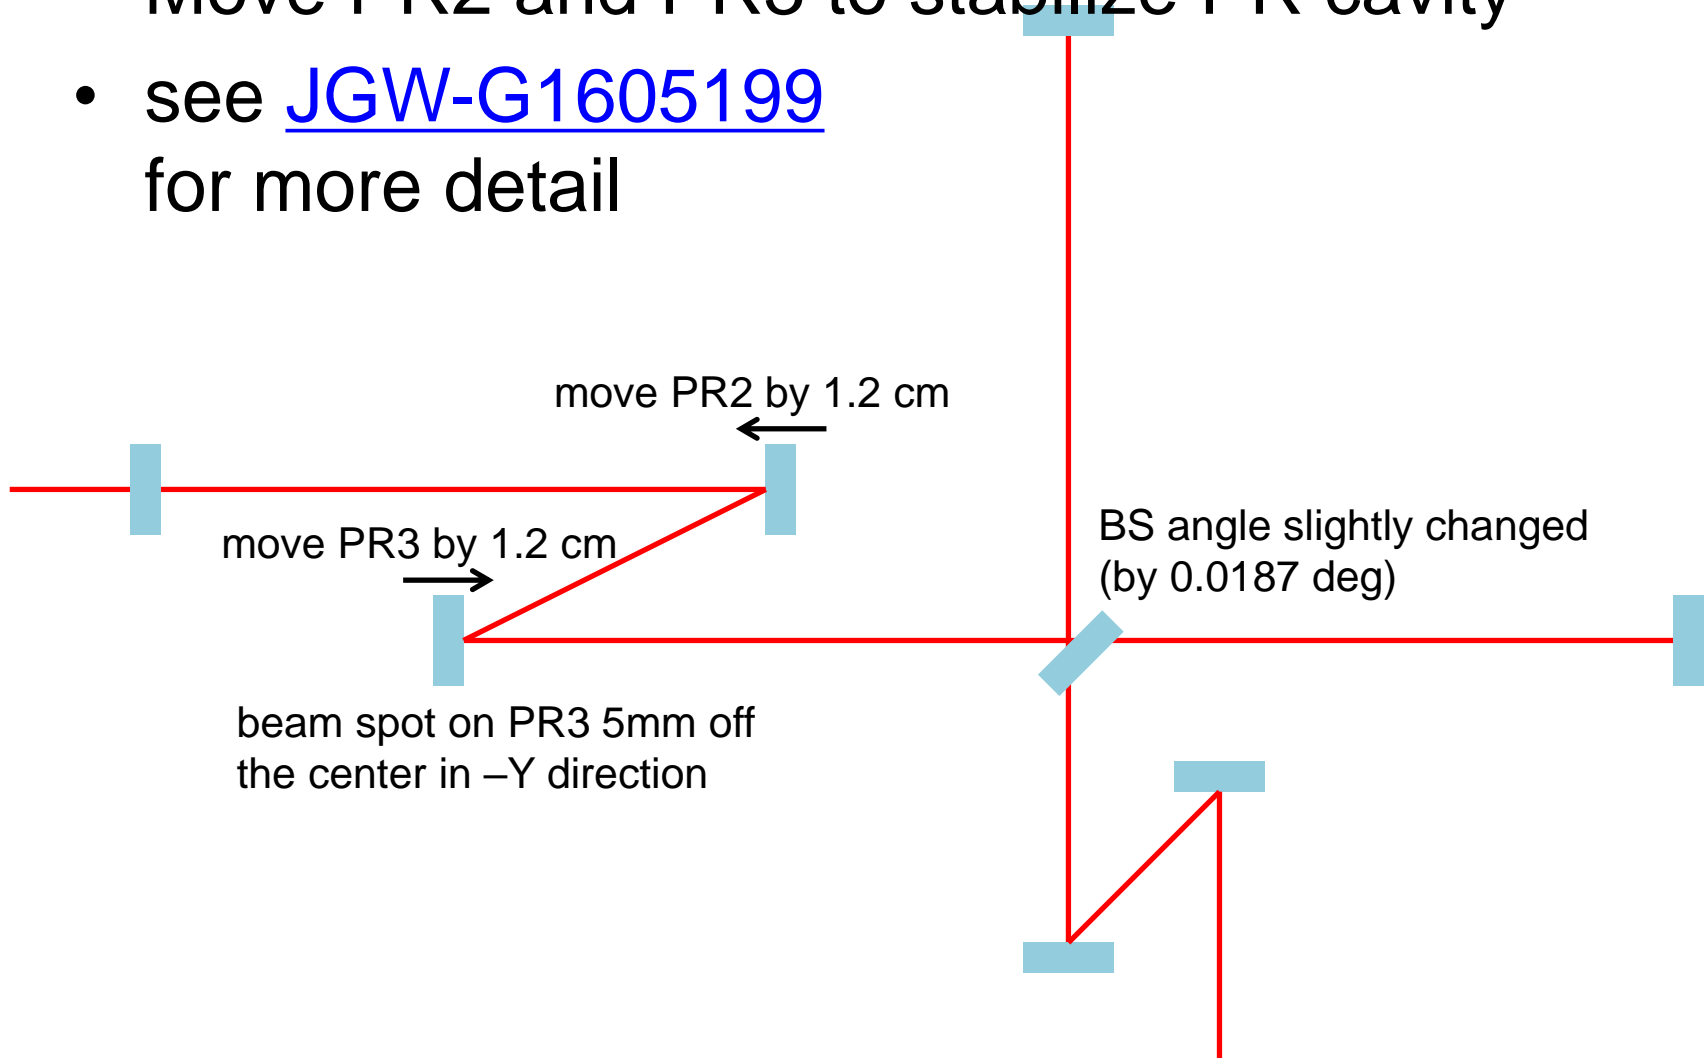

Length Sensing and Control

- Only use f1 sidebands
- Sensing matrix:

[W/m]	MICH	PRCL
REFL_I	+9.92e-01	-7.48e+07
REFL_Q	+6.61e+04	-3.52e+07
AS_I	+8.97e+02	-2.23e-01
AS_Q	-1.67e+06	+4.16e+02

Alignment Sensing and Control

- Only use f1 sidebands (and TRX/Y DC)
- Sensing matrix:



[W/rad]	COMM	DIFF	BS	PRM	PR2'	PR3'
REFLA_I	+4.98e+02	+2.36e-01	-4.16e+02	-8.13e+01	-2.08e-01	-1.21e+03
REFLB_I	-7.01e-01	-2.91e+00	-1.93e+00	-2.10e+01	-1.70e-03	+3.47e+00
ASA_Q	+9.80e-01	+1.87e+02	+1.56e+02	-1.39e-01	+1.31e-03	-2.27e+00
POPA_DC	+4.04e+01	+1.49e+01	-2.41e+01	+3.91e+02	+8.07e+02	-1.57e+01
TRXA_DC	+2.30e+01	+1.71e-01	+1.93e+01	-1.23e-01	-5.66e-03	-6.51e-01
TRYA_DC	-2.30e+01	+1.71e-01	-1.91e+01	-1.17e-01	-3.25e-03	-6.36e-01

- See [JGW-G1605541](#) and [JGW-T1605362](#) for more detail

Transverse Mode Spacing

- g-factor
0.8750 in pitch
0.8958 in yaw
(with designed RoCs & lengths)

- See [JGW-G1605541](#)
[JGW-T1605362](#)
for more detail

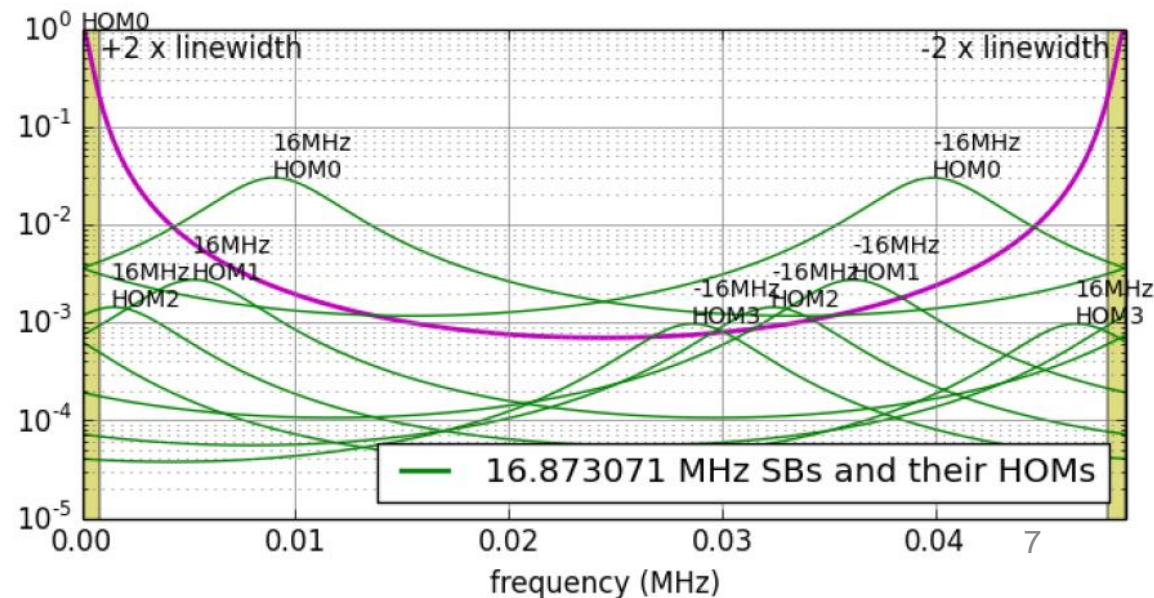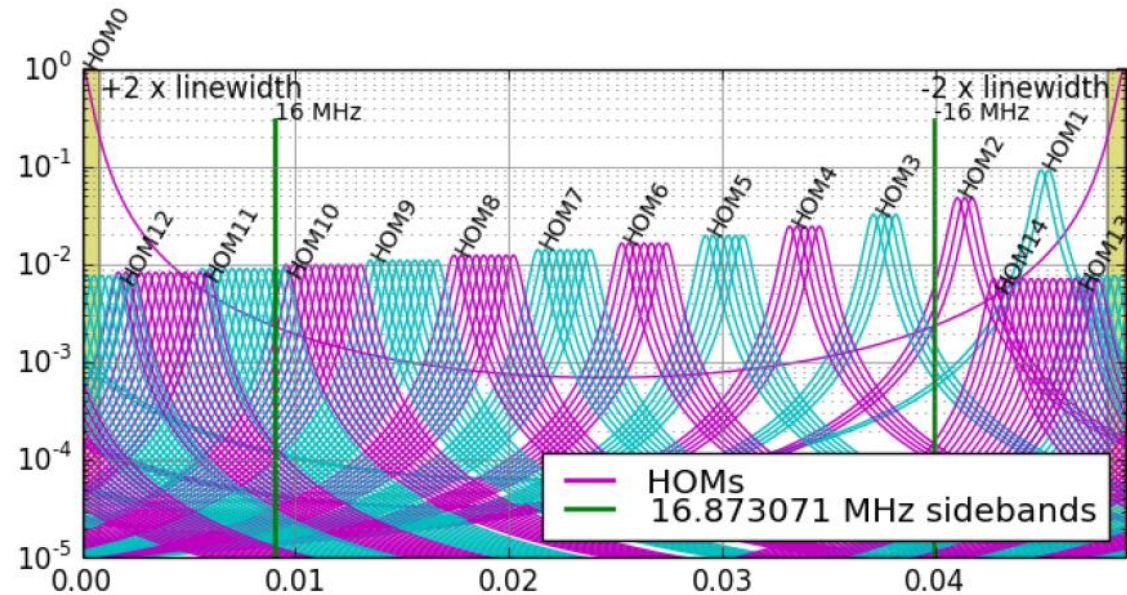

PRMI or MI

- PRMI could be unstable even if PR2-PR3 length is tuned, if combination of PR2/PR3 RoC errors is the worst case
- We don't have much time for TMS tuning
- Thus, we might have to give up PRMI

