

KAGRA+ Upgrade Plans

Yuta Michimura¹, Kentaro Komori¹

Yutaro Enomoto², Koji Nagano²

Kentaro Somiya³

¹Department of Physics, University of Tokyo

²ICRR, University of Tokyo

³Department of Physics, Tokyo Institute of Technology


Overview

- No concrete plan yet
- Some R&D on-going
- Integrated study initiated recently
- Aiming at the first observation in 2022~2024, within current facility

時期的に
可能なのか？




KAGRA Timeline

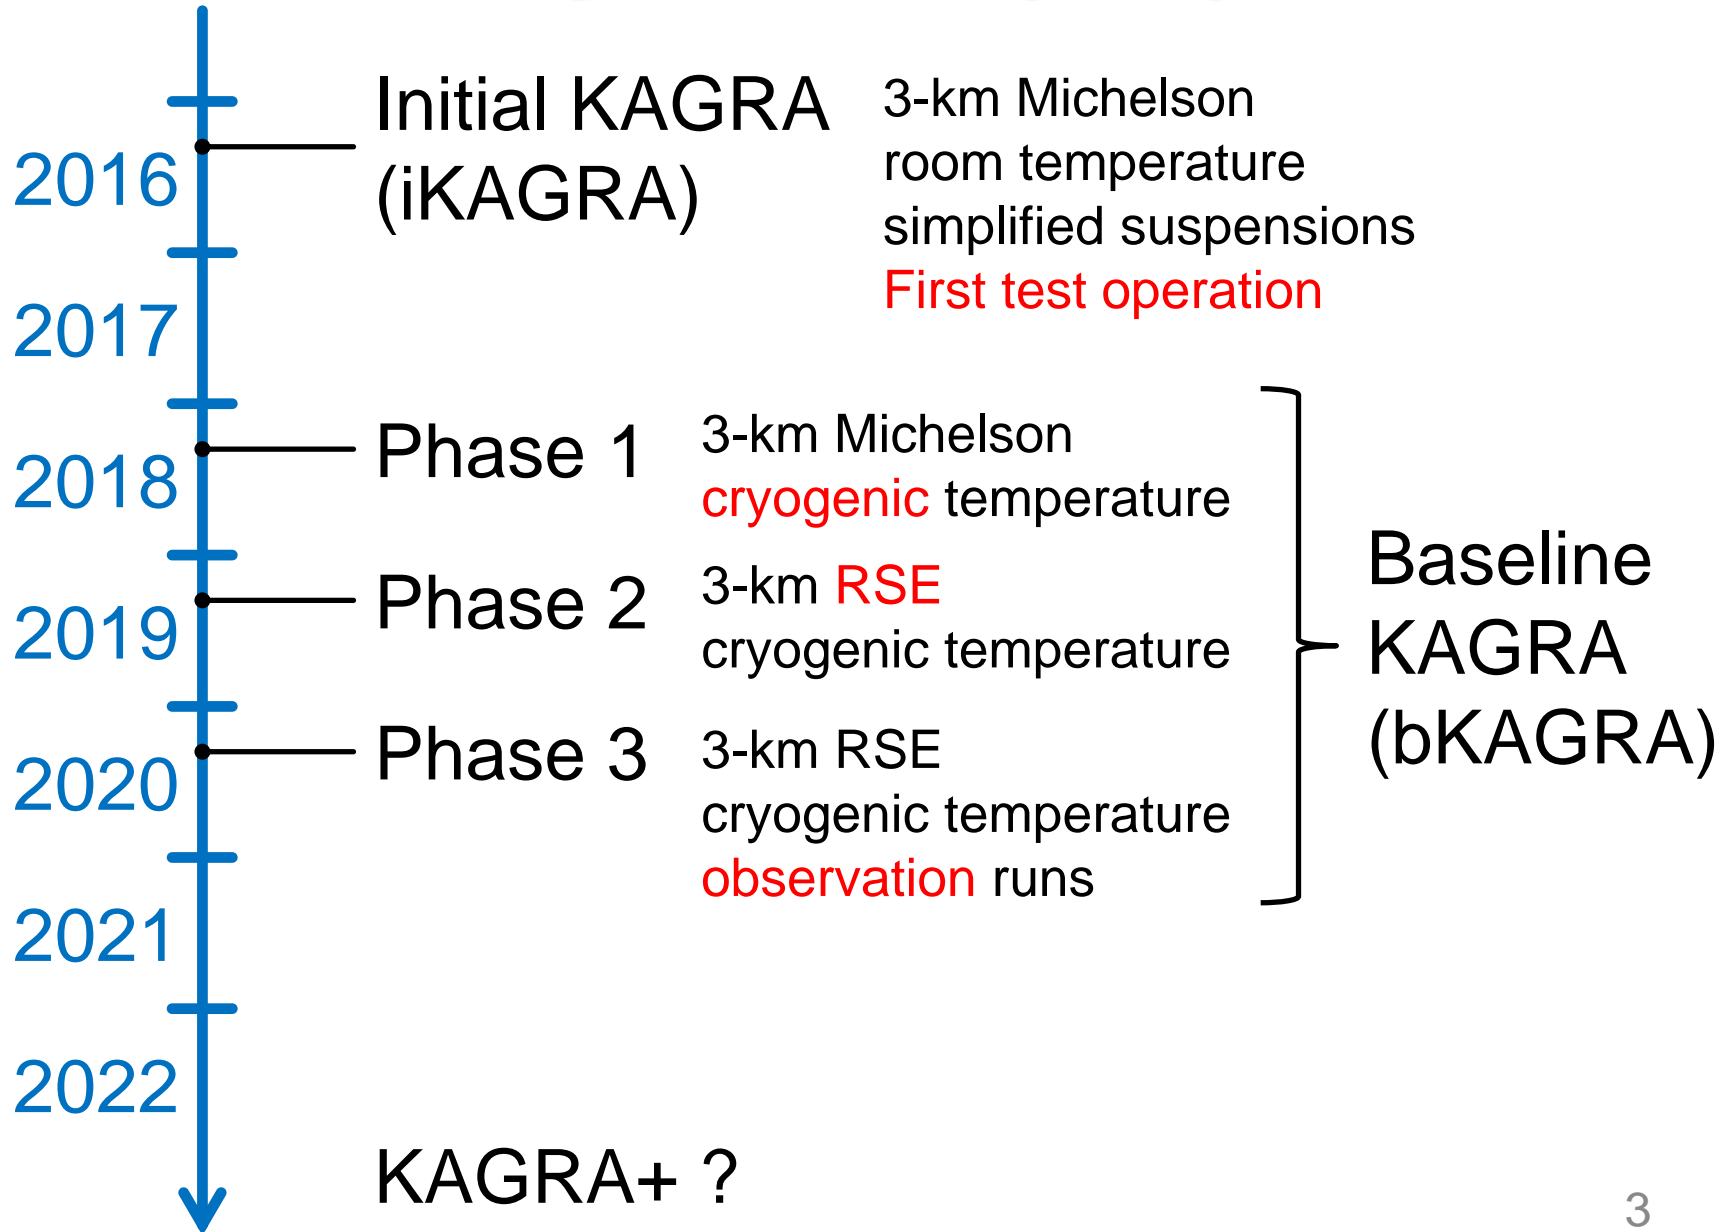


KAGRA Official Sensitivity (v2009)

- 30 kg, 20 K, 825 W at BS \rightarrow BNS 171 Mpc

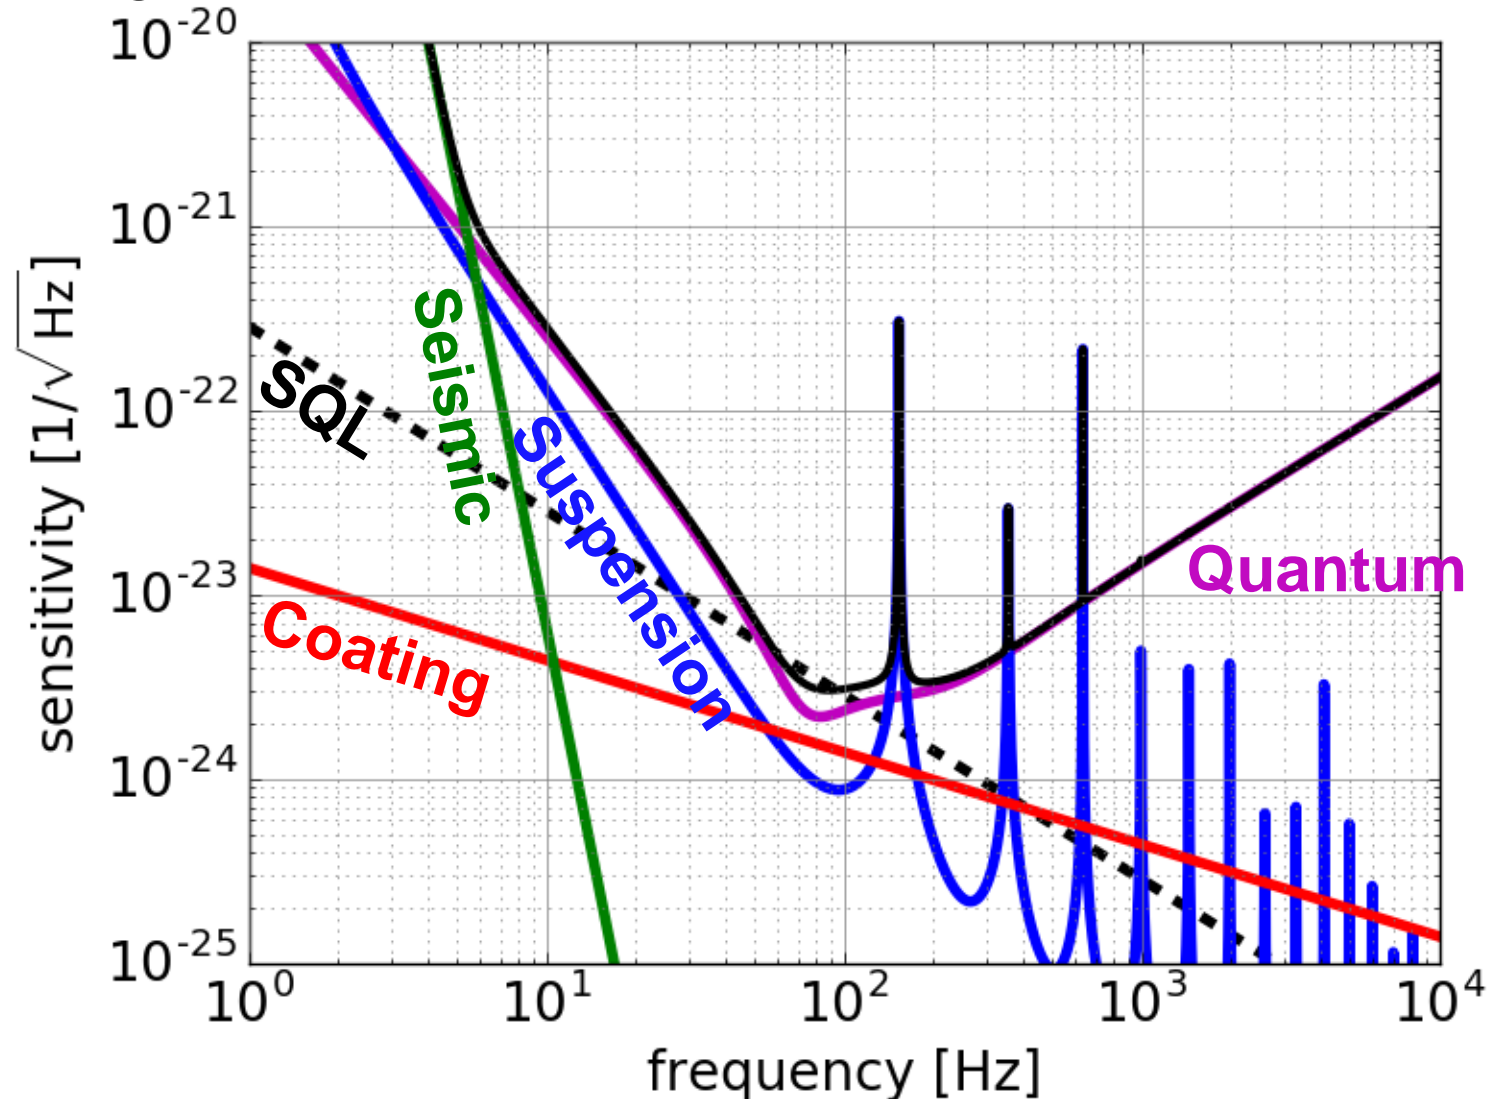


KAGRA PRD Sensitivity (v2013)

- 23 kg, 20 K, 780 W at BS → BNS 148 Mpc

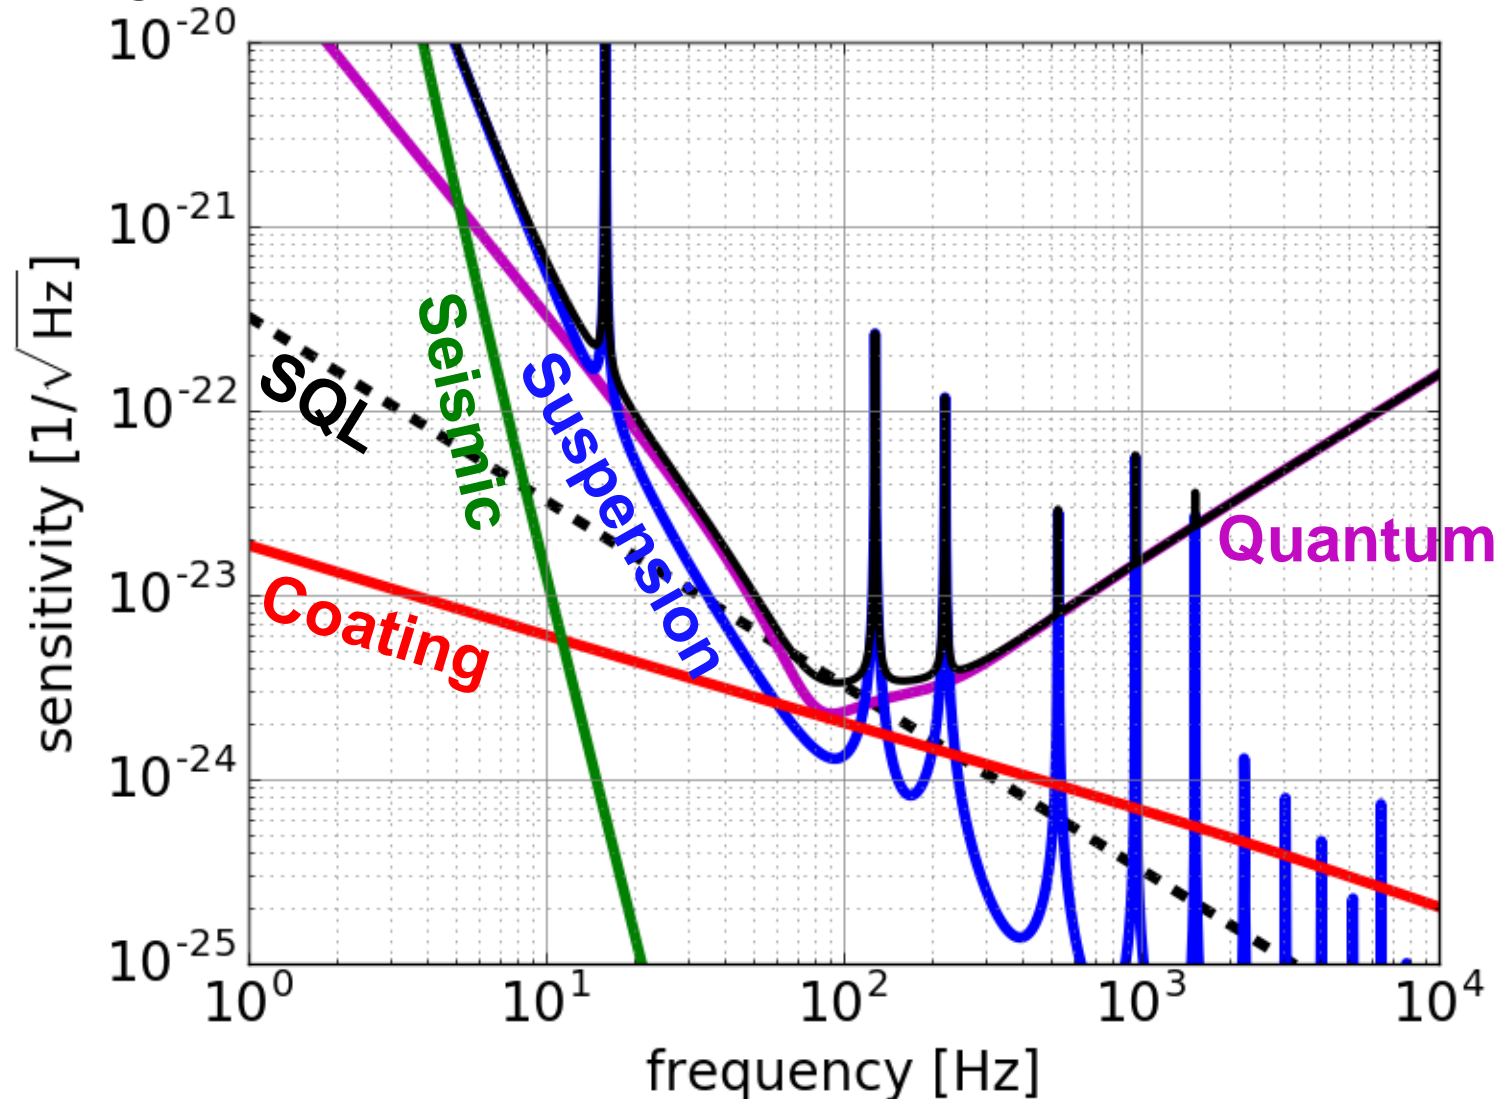



Update on Official Sensitivity

- 23 kg, 23.1 K, 550 W at BS → BNS 152 Mpc

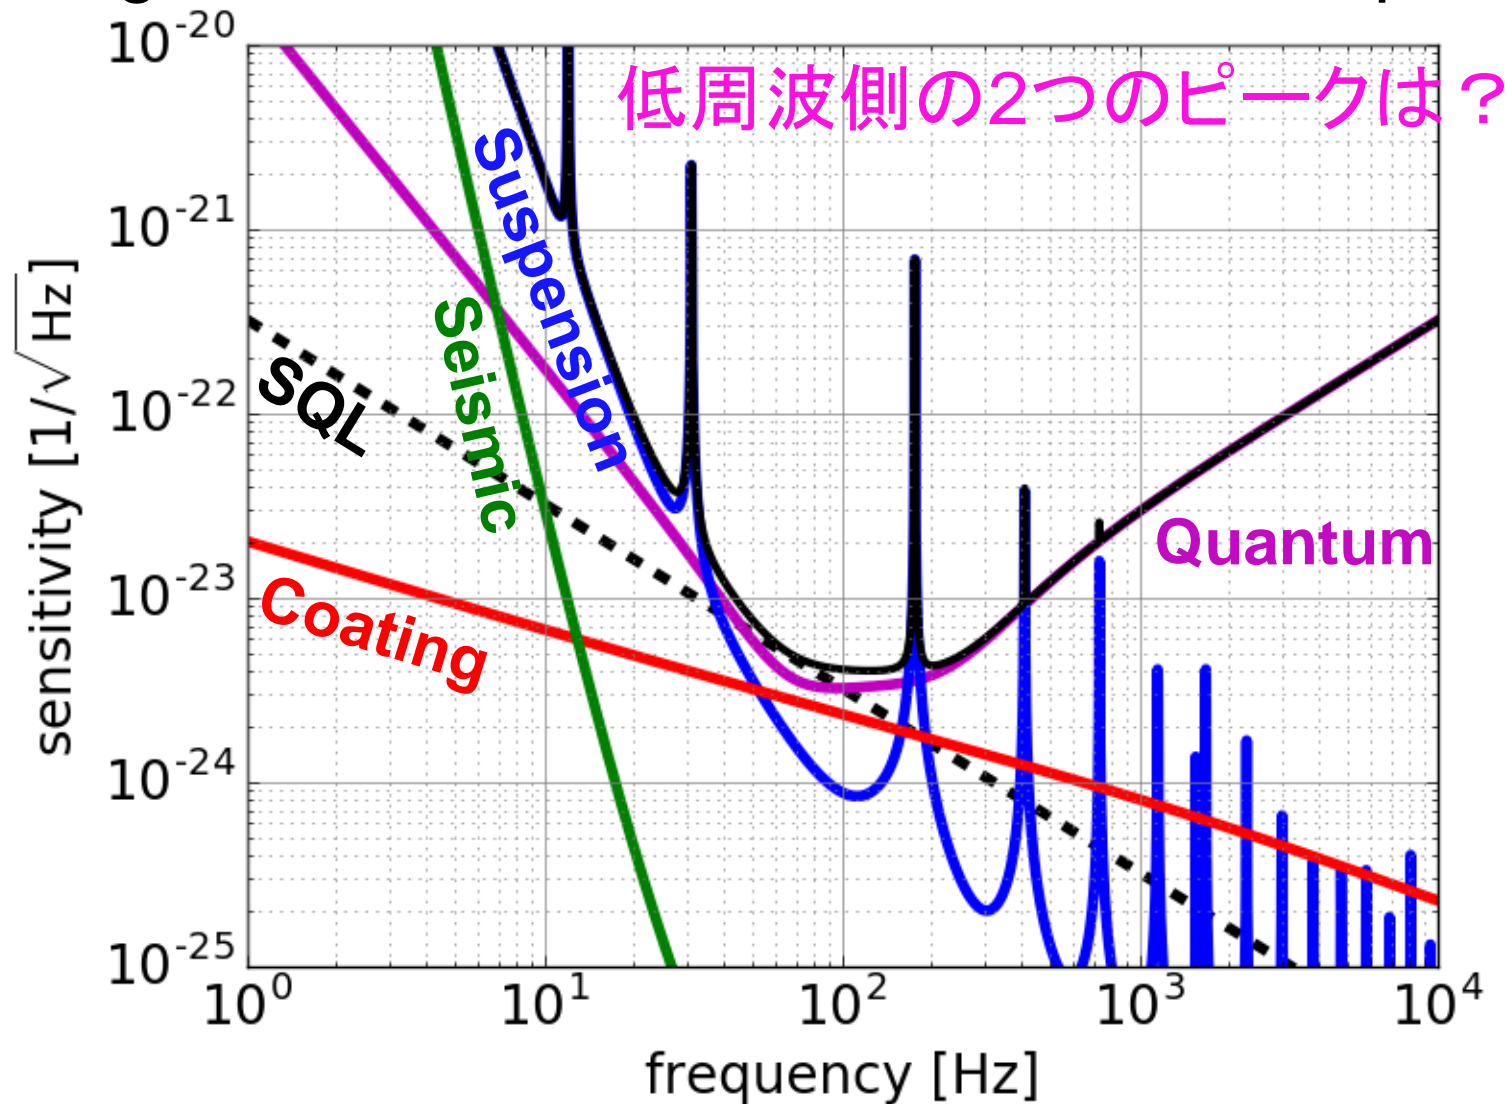


Update details

- Update details (宗宮さんに聞く、オフィシャル感度更新は2009年以來?、2009年感度との比較にするか、麻生PRD2013との比較にするか)

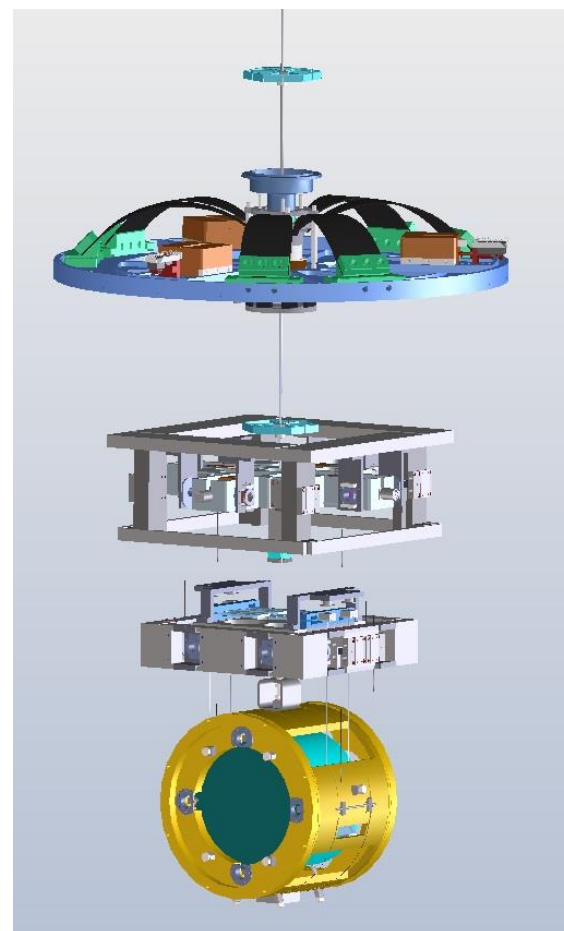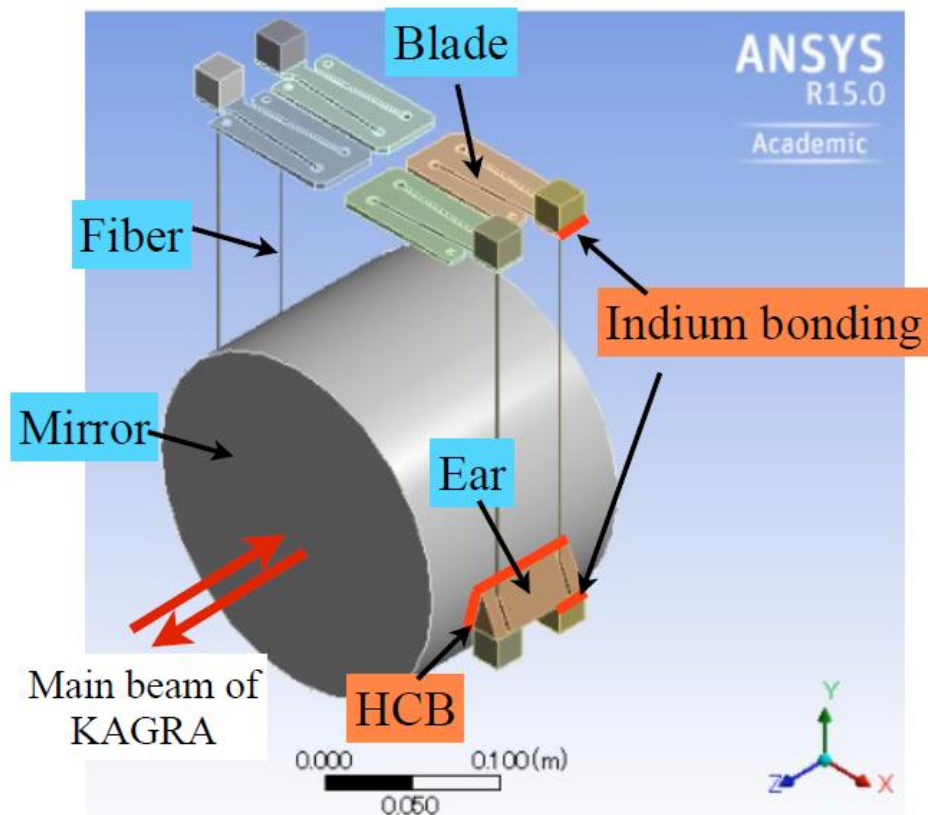

KAGRA vs Other 2G

- Not better even with cryogenic and underground

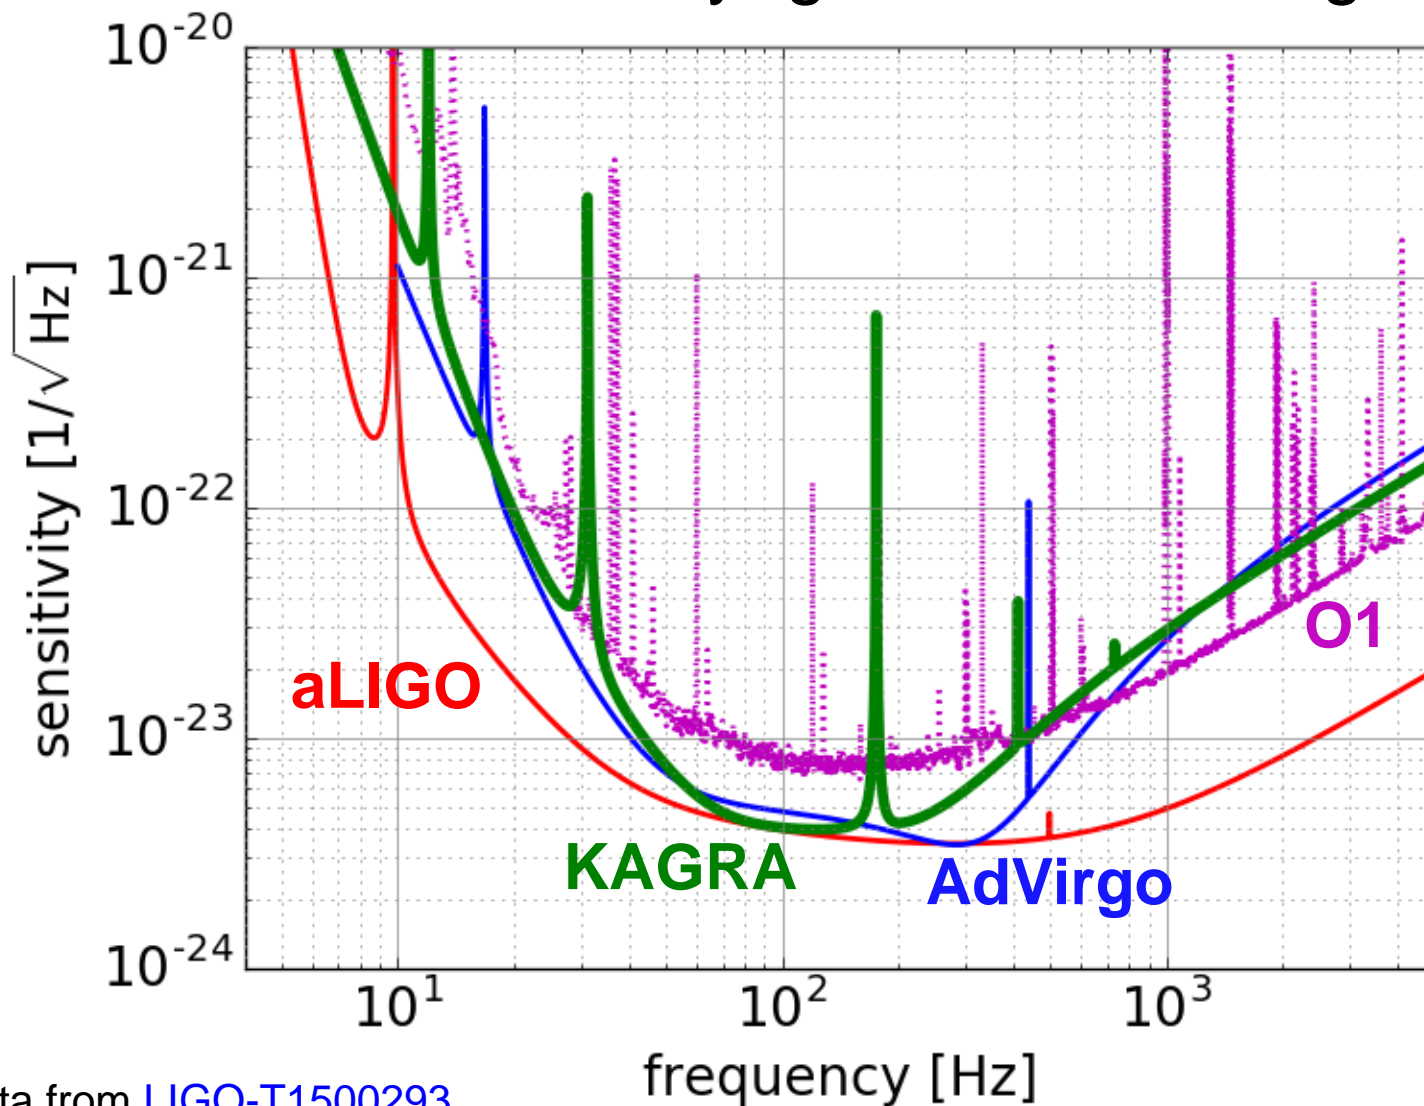

KAGRA vs Other 2G

- Lower power and lighter mass increase quantum noise
- Thick sapphire increase suspension thermal noise (low frequency sensitivity is not limited by underground seismic noise)
- 他に言うことは？

Ideas for Improving Sensitivity

- Increase the mass
 - composite mass
 - A-axis sapphire mass
 - non-cylindrical mass
 - go silicon (upto 200 kg, 45 cm dia.)
- Focus on low frequency
 - low laser power, thin and long suspension
- Filter cavity
 - effectively increase mass and laser power
- ETM different from ITM, half-cryogenic, delay-line, folded arms, higher-order modes ???

A-axisのサイズと重さ
かまぼこのサイズと重さ
サファイア結晶から鏡を
くり抜く図

Example KAGRA+ Sensitivity 1


- Heavier mass (榎本くん?)

Example KAGRA+ Sensitivity 2

- Silicon (小森ちゃんと長野くん?)

Example KAGRA+ Sensitivity 3


- Low frequency (宗宮さんにスペクトルをもらう)

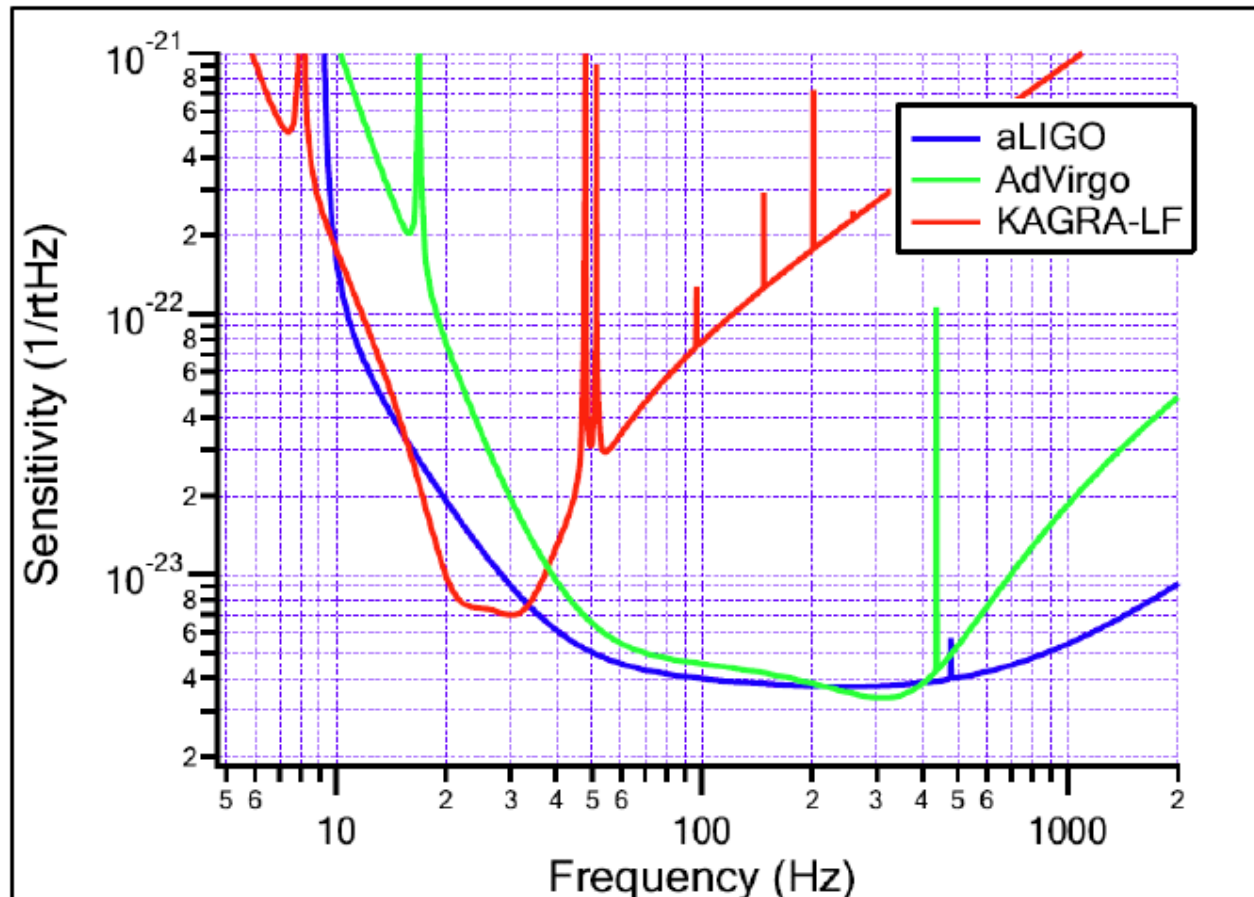



R&D Activities

NAOJ figures from [JGW-G1605361](https://www.nao.ac.jp/figure/JGW-G1605361) by Y. Aso

- Crystalline coating on sapphire
- Cryogenic silicon cavity for thermal noise measurements
- Mirror absorption characterization
- 300m filter cavity at TAMA300
- Quantum radiation pressure noise measurement with mg-scale mirror

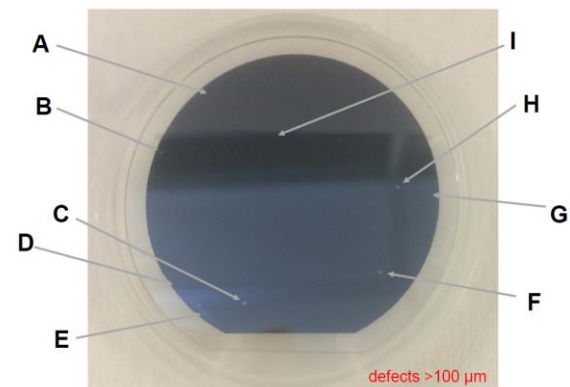

2-inch GaAs/AlGaAs on sapphire
6ppm scattering
9 large defects

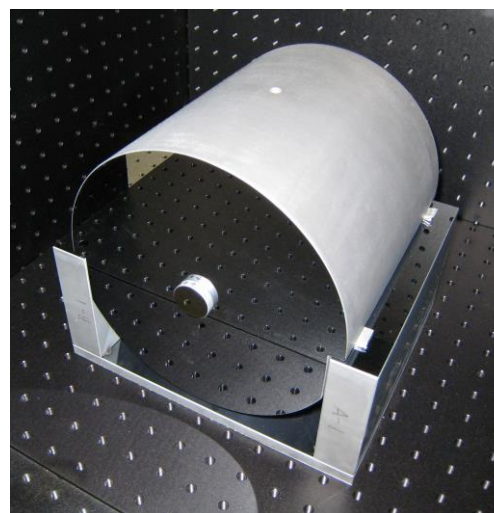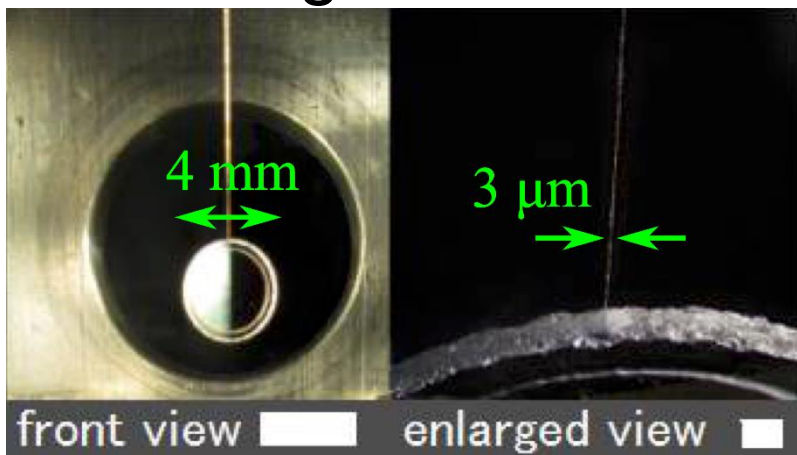

Cryogenic silicon cavity



KAGRA+ Planning Schedule

- February 2017:
Informal brainstorming
- March 2017:
Call for volunteers
- June 2017:
Organize 2-3 teams
- August 2017:
Report proposal from 2-3 teams
→ select one proposal


これでいい？
予算やどういう組織で
議論しているかの話は？

Summary

- R&D on-going for future KAGRA upgrade
- Integrated sensitivity design study on KAGRA+ initiated recently

Supplementary Slides

2-3G Sensitivity Comparison

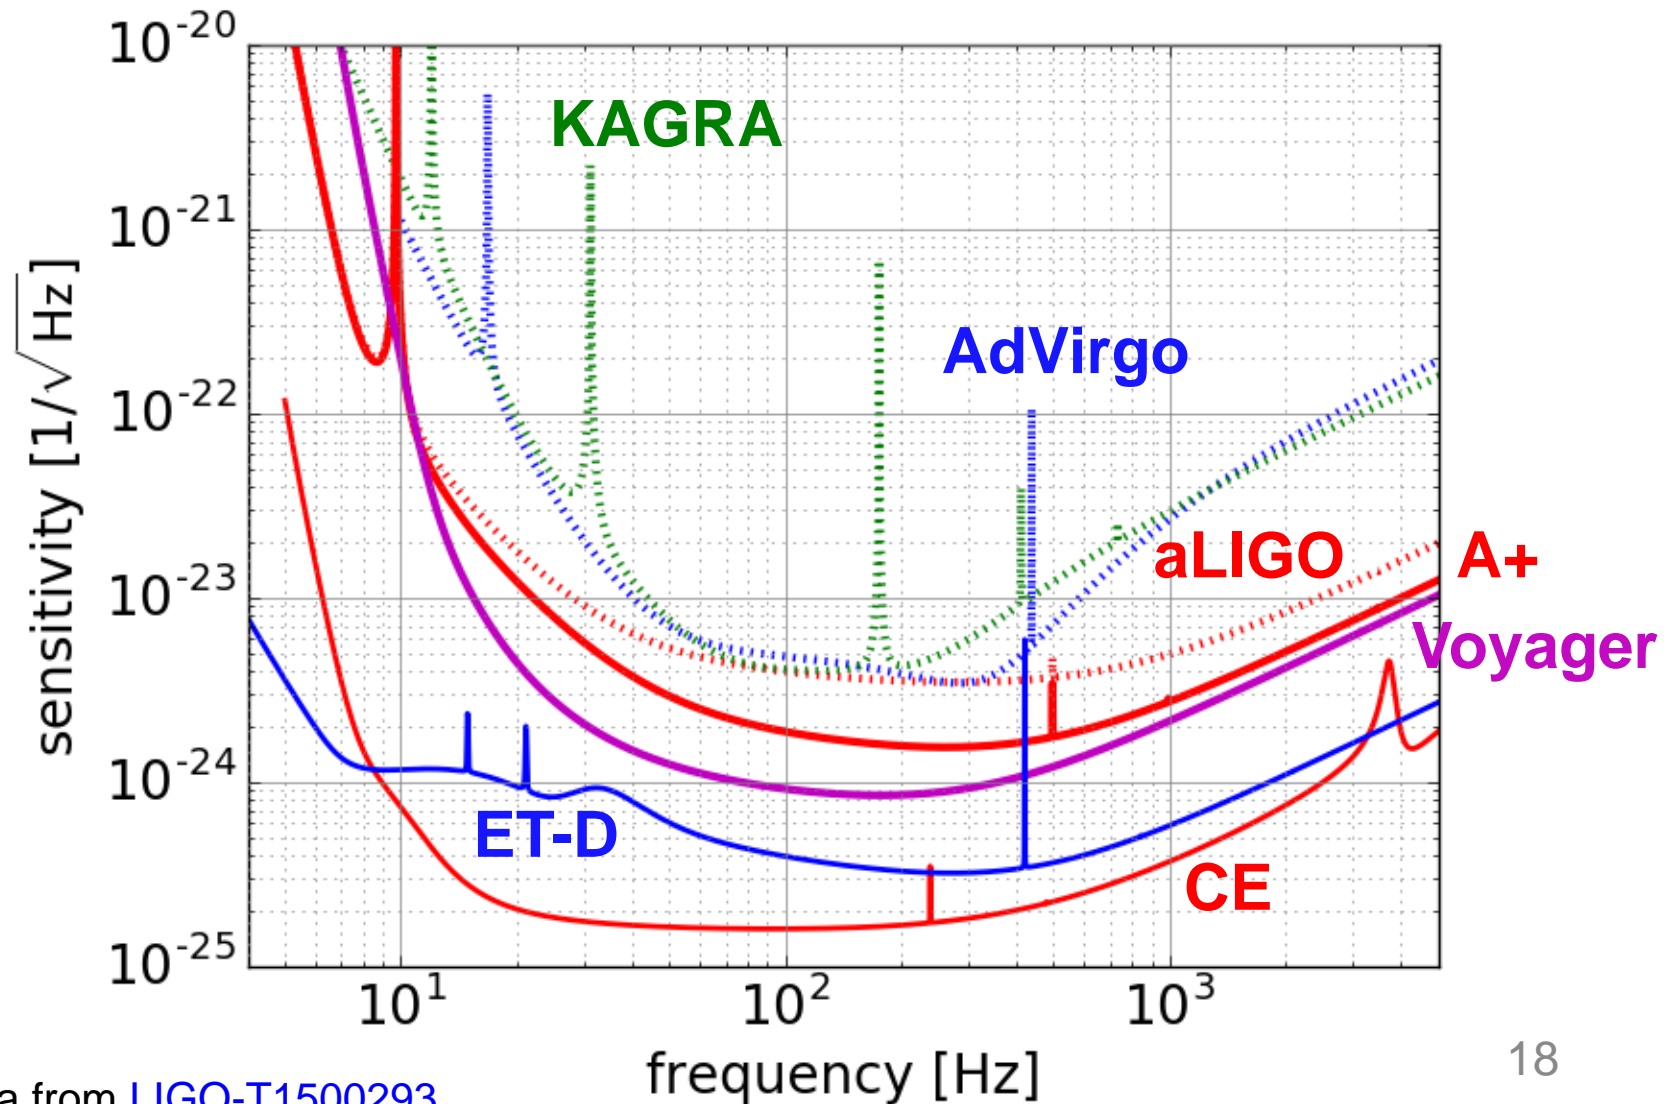

Other References

- K. Somiya, 感度について [JGW-G1605698](#)
On recent official sensitivity update
- K. Somiya, KAGRA2020 [JGW-G1503551](#)
Slides for GWADW2015 on KAGRA upgrade
- K. Somiya *et al.*: LCGT-LF report [JGW-T1100446](#)
Study report on a reconsideration of the LCGT
bandwidth for low-frequency measurements
- M. Ando *et al.*: Study report on LCGT
interferometer observation band [JGW-T1000065](#)